




Photoelectric Composite Fiber Optic Cable GDXTW 12 Core GDTS 24 Cores

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAIISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GDXTW
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

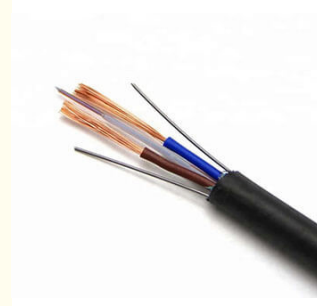



Product Specification

- Warranty Period: 25 Years
- Jacket Color: Black
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Crush Resistance: Long Term: 300N/100mm, Short Term: 1000N/100mm
- Tensile Strength: Long Term: 600N, Short Term: 1500N
- Storage Temperature: -40°C To +70°C
- Outer Jacket Material: HDPE
- Cable Color: Black
- Cable Diameter: 12.5 Mm
- Armored Type: Steel Tape/Aluminum
- Application: Outdoor Duct Installation
- Fiber Count: 24/48/96/144/288
- Highlight: Photoelectric Composite Fiber Optic Cable,

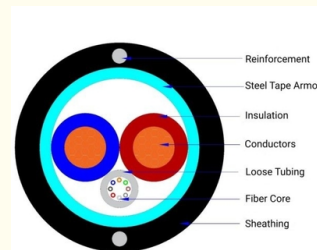

GYXTW-8B1, 3+RV2C*1, 5mm²Bc

More Images




Product Description


Central Tube Photoelectric Composite fiber Cable GDXTW 12 Core gDTS 24 Cores Fiber Optic Cable With cooper wires

- Photoelectric integration, solve the problem of equipment power and signal transmission, provide centralized monitoring and maintenance of equipment power
- Improve power manageability and reduce power supply coordination and maintenance
- Reduce purchase costs and save construction costs
- The precision control of the fiber length ensures that the fiber has good tensile performance and temperature characteristics
- It is mainly used in DC remote power supply system of distributed base stations to connect BBU and RRU
- Suitable for direct burial

Our Product Introduction

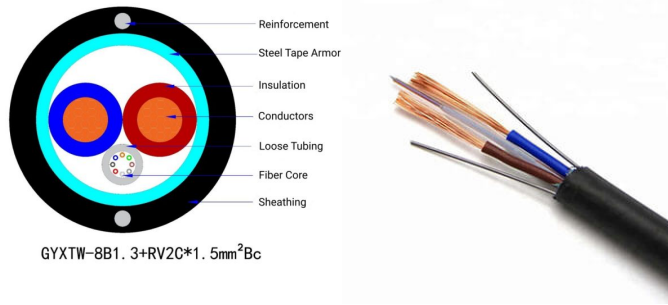

HYBIRD Cable Place Order Information

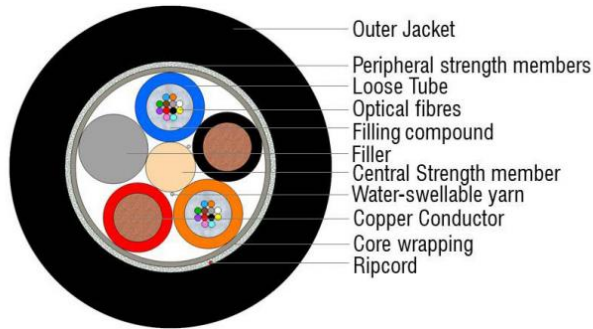

Product Paramenters

item				
cooper	RVV2*2.5MM	RVV-4*2.5mm	RVV-6*2.5mm	RVV-8*2.5mm
weight	347	382	502	628

fiber count	structure	fibers per tube	loose tube diameter	CONDUCTOR CORSS SECTIONAL AREA	cable diameter	cable weight
2-18	1	2-18	1.8±0.1	1	9.4	92
20-24	1	20-24	1.9±0.1	1	10.4	106
2-18	1	2-18	1.8±0.1	1.5	10.8	119
20-24	1	20-24	1.8±0.1	1.5	11.3	127

Item		Unit	Specification
Fier Tyoe		G652D	G652D
Mode filed Diameter	1310nm	μm	9.2±0.4
	1550nm	μm	10.4±0.8
Cladding diameter		μm	125.0±0.1
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245±7
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		μm	≤1260
Attenuation Coefficient	1310nm	db/km	≤0.36
	1550nm	db/km	≤0.22
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652


Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..


Also can according to client cable marking.

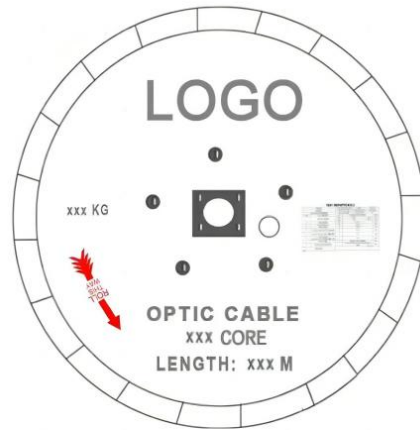

Production Supplier Profile

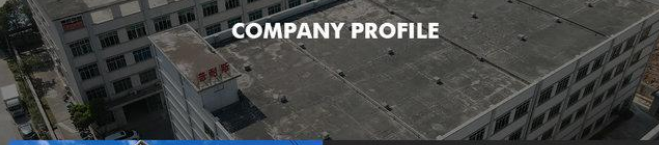

COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.

 **guangzhou
fiber
cablepuls
co ltd**

+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.

5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China