



48 96 Fiber Optic Splice Closure Mechanical Sealing IP68

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: DOME FIBER SPLICE CLOSURE
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Capacity: Up To 144 Fibers
- Material: High-strength Engineering Plastic
- Fiber Type: Single Mode Or Multimode
- Fiber Storage: Loose Tube Or Ribbon Fiber
- Installation Method: Wall-mounted Or Pole-mounted
- Closure Dimensions: 450mm X 200mm X 100mm
- Sealing Method: Mechanical Sealing
- Application: Outdoor Or Indoor Use
- Splice Tray Capacity: 12-24 Fibers Per Tray
- Operating Temperature: -40°C To 65°C
- Splice Protection Sleeve: Heat Shrinkable Tube
- Protection Level: IP68
- Cable Entry: 4 Cable Ports
- Highlight: Sealing Dome Fiber Optic Splice Closure,
96 Fo Fiber Optic Splice Closure,
48 Fo Fiber Optic Splice Closure



More Images



Product Description

48 96 Fo Fiber Optic Splice Closure with Mechanical Sealing Dome

Product Overview

High-performance fiber optic splice closure designed for outdoor and indoor applications, featuring mechanical sealing technology and IP68 protection rating.

Key Specifications

Attribute	Value
Capacity	Up to 144 fibers
Material	High-strength engineering plastic
Fiber Type	Single mode or multimode
Installation	Wall-mounted or pole-mounted
Dimensions	450mm x 200mm x 100mm
Operating Temperature	-40°C to 65°C
Protection Level	IP68





Strand Overhead application.



Underground application.



Pole application.



Wall mounting application.




Technical Parameters


Parameter	Value
Cable Ports	5 Entries

Cable Diameter	Φ10~Φ38mm
Max Fiber Capacity	96 Fibers
Splice Tray	24 Fibers + 24 SC Fiber Port
Sealing Type	Shrinkable Seal Type
Lateral Pressure Resistance	≥2000N/10cm
Shock Resistance	≥20N.m
Weight	5.8kg

Manufacturer Information

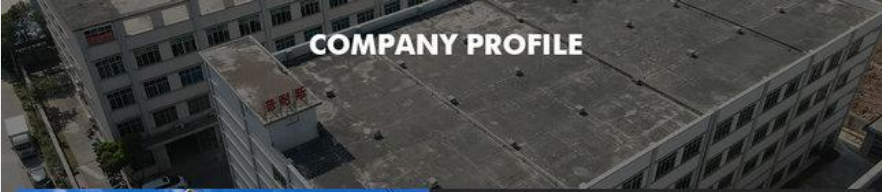

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Custom Order Process

Send your purchase requirements to cotton@fibercablepuls.com

Our sales team will confirm product specifications and requirements

Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping coordination starts 2 weeks before production completion

For OEM or customized orders, please contact our sales team at cotton@fibercablepuls.com



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International
Guangzhou city, Guangdong province, China