




Indoor / Outdoor FTTH Drop Cable 1 Core 2 Core 4 Cores With Steel Wires

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GJXH/GJYXCH
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 1000km






Product Specification

- Laying Method: Aerial
- Applications: Outdoor Fth Cabling
- Cable Weight: 32KG±1KG
- Installation Tensile: 200N
- Cable Size: Max. 16.0mm
- Installation Temperature: -5°C~+60°C
- Fiber Count: 1-4 Fibers
- Messenger Size: 1.0mm/1.1mm/1.2mm
- Use: FTTX
- Operating Temperature: -40°C To 85°C
- Warranty: 1 Year
- Steel: 0.45mm
- Construction: 2pcs Steels
- Cable Od: 2.0*5.0mm
- Messenger: 0.5, 1.0, 1.2mm Optional



More Images



Product Description


FTTH DROP CABLE INDOOR/OUTDOOR 1 Core 2 Core 4 Cores With Steel Wires FTTH DROP CABLE OUTDOOR OR INDOOR

FTTH Drop Cable is all dielectric drop cable consisting of 1 to 4, 250µm individually colored optical fibers with Fiber Reinforced Plastic (FRP) strength members and UV resistant Low Smoke Zero Halogen (LSZH) or PE jacket.

FEATURES AND APPLICATIONS

Singlemode options available
Compact cable construction
FRP strength member
Individually coloured optical fibers
Conforms to IEC standard
Ideal use for FTTH applications
Horizontal cabling

Our Product Introduction

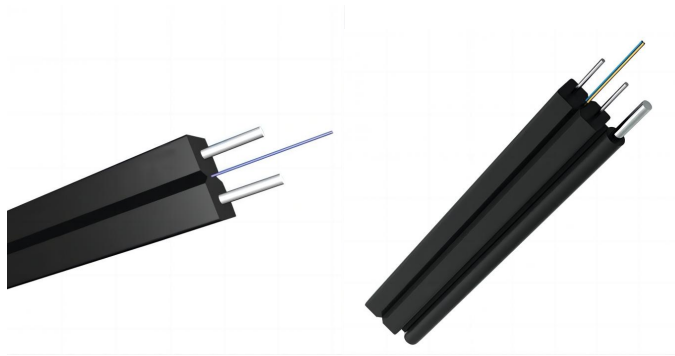

DROP CABLES		
FTTH DROP F/D CABLE		
FTTH DROP F/D CABLE SWA		
FTTH AERIAL DROP F/D CABLE		
FTTH AERIAL DROP F/D CABLE SWA		

cable structure

1.STEEL WIRE 2.FIBER 3. LSZH JACKAGE

diameter of cable: $(2.0\pm0.2)\times(5.0\pm0.2)\text{mm}$

type fiber:Singlemode G.657A

2KM/PLYWOOD REEL

REEL SIZE: 40*40*37cm

G.W.: 42KG/REEL 2KM/REEL

20KG/KM

Phosphating steel wire :1 *1.0 mm

Phosphating steel wire: 2*0.45 mm

PRINTING ON SHEATH: **CABLEPULS 2024 FTTH DROP CABLE XXCORE(G.657A) XXXXm**

*The marking is printed every 1 meter;

- The color of marking is white, but if the remarking is necessary, the yellow color marking shall be printed newly on a different position.
- An occasional unclear of length marking is permitted if both of the neighboring markings are clear;
- The both cable ends are sealed with heat shrinkable end caps to prevent water ingress.

Item		Unit	Specification
Fier Tyoe		G652D	G652D
Mode filed Diameter	1310nm	μm	9.2 ± 0.4
	1550nm	μm	10.4 ± 0.8
Cladding diameter		μm	125.0 ± 0.1
Cladding non-circularity		%	≤ 1.0
Core/cladding concentricity error		μm	≤ 0.5
Coating diameter		μm	245 ± 7
Coating/cladding concentricity error		μm	≤ 12
Cable cut-off wavelength		μm	≤ 1260
Attenuation Coefficient	1310nm	db/km	≤ 0.36
	1550nm	db/km	≤ 0.22
Proof stress level		kpsi	≥ 100
Note: Other parameters meet standard ITU-T G.652			


Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

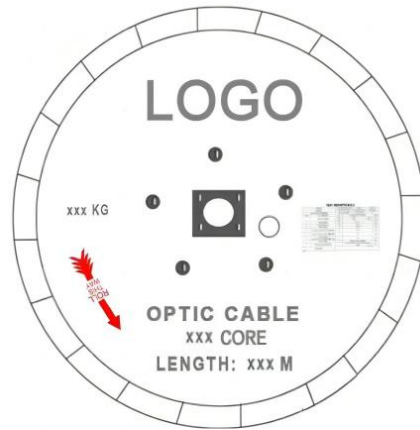

Production Supplier Profile

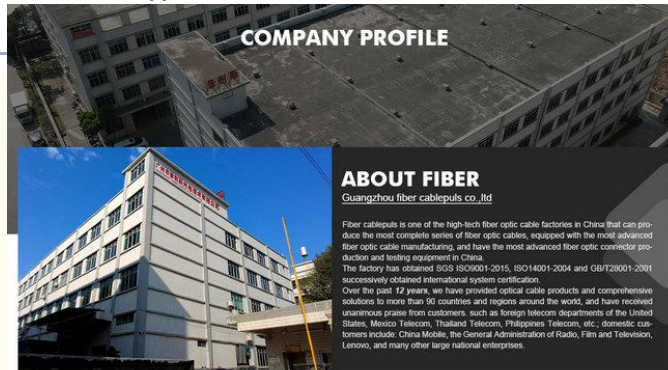

+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.

5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China