### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH

Model Number: Overhead cable accessories/hardware

• Minimum Order Quantity: 100pcs

 Packaging Details: Wooden Spool /drum

. Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 10000pcs



# **Product Specification**

· Application: Overhead Power Transmission Lines

Durability: Long Service Life Material: Aluminum Alloy • Type: Suspension Clamp

· Design: Sleek And Compact Design

Suitable For Various Weather Conditions • Weather Resistance:

Customizable Sizes Available Size: Installation: Easy And Quick Installation

• Function: Support And Fix ADSS/OPGW/OPPC

Cables

• Tensile Strength: Can Withstand High Tensile Strength

· Color:

Compatibility: Compatible With Different Types Of Cables

. Highlight: Preformed Dead End Tension Clamp,

ADSS Cable Dead End Tension Clamp. **OPGW Cable Dead End Tension Clamp** 



# More Images









# Preformed Dead End Tension Clamp For ADSS & OPGW Fiber Optic Cable


### **Product Specifications**

Attribute	Value
Application	Overhead power transmission lines
Material	Aluminum alloy
Туре	Suspension clamp
Weather Resistance	Suitable for various weather conditions
Size	Customizable sizes available
Tensile Strength	Can withstand high tensile strength
Compatibility	Compatible with different types of cables

#### **Product Description**

This preformed dead end tension clamp is designed for ADSS and OPGW fiber optic cables in overhead power transmission applications. It features a sleek, compact aluminum alloy construction with excellent durability and weather resistance.



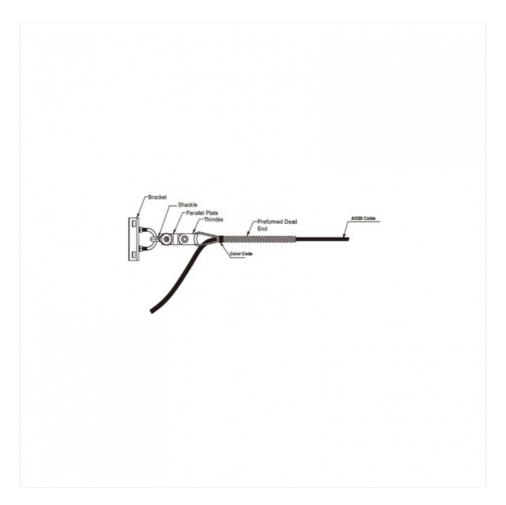

#### **Key Features**

Provides turning angle, continuation and terminal connection for cables

Helical aluminum-clad steel rod design for strong tensile strength

Eliminates concentrated stress to protect cables and reduce vibration

Holding strength ≥95% of rated tensile strength

Quick and easy installation reduces construction costs

Ideal for spans under 100m

Special design prevents undue stress on ADSS cables

# **Construction Details**

Shackle: Hot dip galvanized steel for connection with fastening clamp on poles/towers.

Twisted Chain Link: Hot dip galvanized steel for connecting U-Shackle and Clevis Thimble.

Thimble: Hot dip galvanized cast steel for protection and connection.

**Armor Rods:** Aluminum clad steel wire with particle emery layer for increased friction. Pre-assembled in four subsets to reduce errors and speed installation.

Preformed Dead End: Made of hot dip galvanized steel or aluminum clad steel wire with firm emery layer for superior gripping strength.



### **Ordering Information**

# How to place an OEM or customized order:

Send purchase inquiry to:


cotton@fibercablepuls.com

Our sales team will confirm product specifications and requirements

Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping coordination begins 2 weeks before production completion

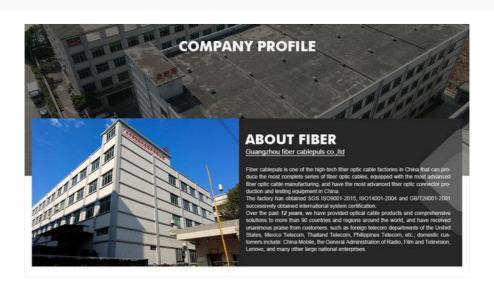





# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China