



Drop Asu Cable Mini Adss Optic Fiber Cable 2-24 Cores Mini 12 Hilos

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ASU-120/80
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Fiber Count: 12
- Application: Outdoor Overhead
- Inner Sheath Material: PE
- Installation Method: Aerial
- Strength Member Material: FRP*2
- Cable Diameter: 7mm/8mm
- Span: 80m-120m
- Highlight: Drop Asu Cable, 24 Cores Asu Cable, 12 Hilos Asu Cable



More Images



Product Description

Asu Fibra Optica Drop Asu Fibre Optic Cable Mini Adss Optic Fiber Cable 2-24 Cores Mini Adss Fibra Optica Adss 12 Hilos

Introduction


1. The optical fiber is put in a loose tube.
2. The fiber can be 1-24 cores in the tube.
3. Tube filling compound will be used for as water blocking elements.
4. Two FRP are put together for the tensile strength purpose.
5. This is economic and compact design for replace ADSS in SZ stranded design.
6. The cable is finished with PE or LSZH jacket.

Our Product Introduction



Features and Applications

- ✓ High tensile strength
- ✓ All dielectric structure and semi-dry core design
- ✓ Small diameter and light weight
- ✓ Self-supporting aerial installation

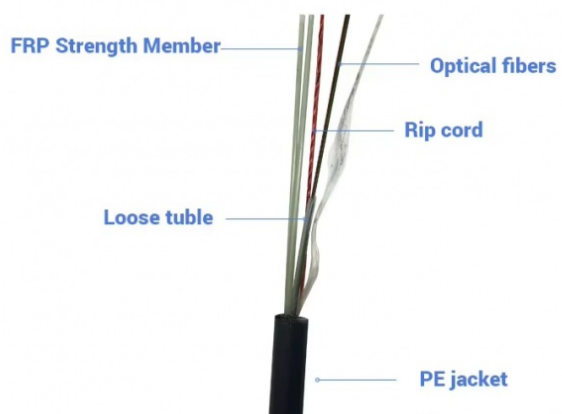

ASU Cable Place Order Information



High quality PE/HDPE material

cable sheath, very smooth
surface, anti-UV, flame-Resistant



Item		Parameters		
Fiber Count		12		
Filler		Rip cord		
Span		100m		
Colored coated fiber	Dimension	250μm±15μm		
	Color	Blue, Yellow, Green, Red, Violet, White Brown, Pink, Black, Gray, Orange, Aqua		
Loose tube	Diameter	1.7mm±0.1mm		
	Material	PBT		
	Color	blue		
Filling compound in loose tube		Gel		
Strength Member	FRP	2.0mm		
Armoured	Non-armoured			
Outer sheath	Material	PE		
Cable diameter	8.0mm			
Fiber Parameters				
No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
2		1550nm	μm	10.4±0.8
3	Cladding Diameter		μm	125.0±1.0
4	Cladding Non-Circularity		%	≤1.0
5	Core-Cladding Concentricity Error		μm	≤0.5
6	Coating Diameter		μm	245±5
7	Coating Non-Circularity		%	≤6.0
8	Cladding-Coating Concentricity Error		μm	≤12.0
9	Cable Cutoff Wavelength		nm	Acc≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm2*km)	≤0.092
14	Typical value		ps/(nm2*km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average		1310nm-1550	≤0.01dB


Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

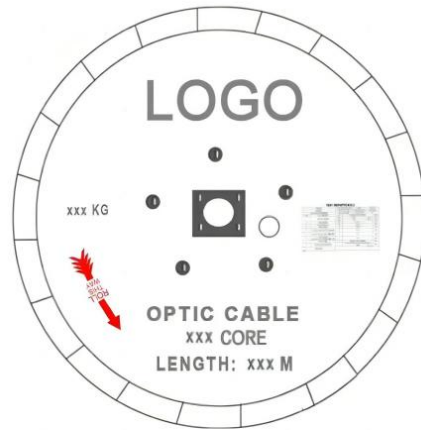

Production Supplier Profile

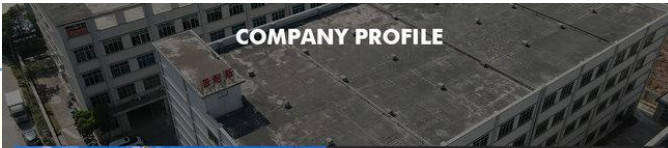

COMPANY PROFILE



ABOUT FIBER

[Guangzhou fiber cablepuls co.,ltd](http://Guangzhou-fiber-cablepuls.co.,ltd)

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China