




Gyty53 Duct Fiber Direct Buried Cable 12 24 36 48 72 96 Core GYTA GYTA53 GYTY53

Our Product Introduction


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTY53
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

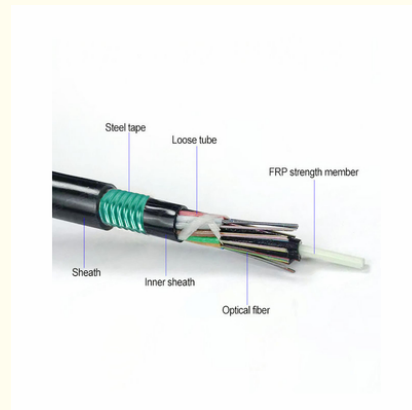


Product Specification

- Insulation Material: Polyethylene (PE)
- Application: Underground Installations
- Waterproof: Yes
- Direct Burial Rated: Yes
- Highlight: **Fiber Direct Buried Cable, Gyty53 Direct Buried Cable, Direct Buried Cable 96 Core**

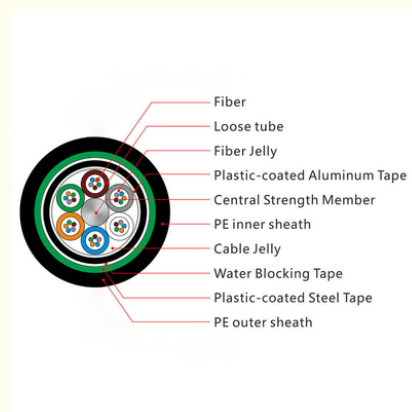

More Images




Product Description

Gyta53 Gyty53 Duct Direct Buried Fiber Optic Cable 12 24 36 48 72 96 Core GYTA GYTA53 GYTY53 Fibre Optic Cable


GYTY53

Product Structure:

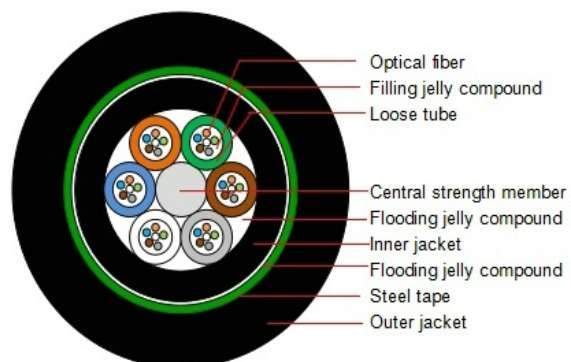

Product Description:

GYTY53 (Loose tube stranding, Metal strength member, Flooding jelly compound, PE inner jacket, Steel-polyethylene adhesive outer jacket)

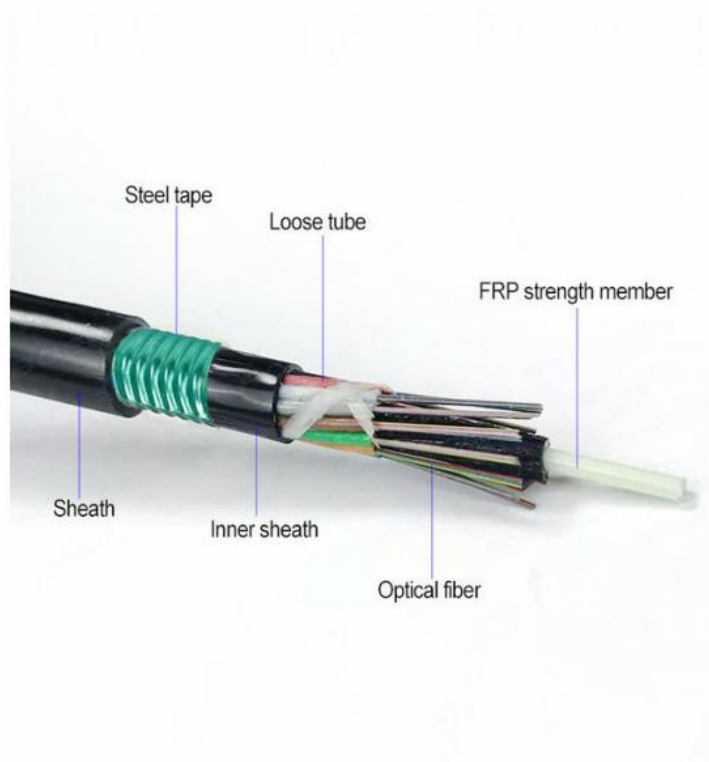

Standards:

YD/T 901-2009 Outdoor layer stranded optical cable for telecommunications

Technical Parameters(Typical Value):

Fiber Count	Structure	Diameter (mm)	Weight (kg/km)	Tensile(N)		Crush(N)		Bending Radius(mm)	
				long term	Short term	long term	Short term	Static	Dynamic
2-30	1+6	11.6	140	1000	3000	1000	3000	12.5D	25D
32-36	1+6	11.6	140	1000	3000	1000	3000	12.5D	25D
38-60	1+6	12.4	161	1000	3000	1000	3000	12.5D	25D
62-72	1+6	12.4	162	1000	3000	1000	3000	12.5D	25D
74-84	1+7	13.3	186	1000	3000	1000	3000	12.5D	25D
86-96	1+8	13.9	199	1000	3000	1000	3000	12.5D	25D
98-108	1+9	14.6	217	1000	3000	1000	3000	12.5D	25D
110-120	1+10	15.3	240	1000	3000	1000	3000	12.5D	25D
122-132	1+11	15.9	255	1000	3000	1000	3000	12.5D	25D
134-144	1+12	16.7	277	1000	3000	1000	3000	12.5D	25D
146-216	1+6+12	16.6	278	1000	3000	1000	3000	12.5D	25D
218-288	1+9+15	18.6	341	1000	3000	1000	3000	12.5D	25D



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Note

- 1.D refers to the cable diameter;
- 2.The relevant technical Parameters can be adjusted according to the customer's demands;
- 3.The block water way can be adjusted according to the customer's demands;
- 4.The design flame resistance, anti-rodent, termite resistant cable according to the customer's demands.



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China