




Fiber Optic Anti Rodent Cable Steel Tape Armored GYTA33

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAIISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTA33
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Fiber Count: 2-288
- Water Blocking: Water Swellable Tape
- A armor Type: Steel Tape/ALUMINUM TAPE
- Armored: Steel Tape
- Rodent Protection: Anti-rodent Tape/Steel Wires
- Function: Anti Rodent
- Crush Resistance: 2000N/100mm
- Transport Package: Wooden Drum
- Strength: APL,PSP,FRP,PE
- Work Time: More Than 30 Years
- Jacket Color: Black
- Moisture Barrier: Water Blocking System
- Loose Tube Material: PBT
- Color: Black
- Strength Member: Steel Wire



More Images

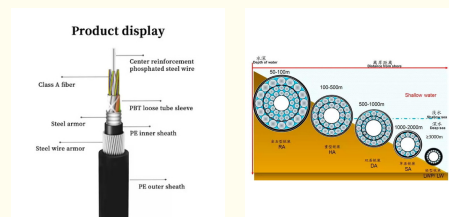

Product Description

Anti-Rodent Fiber Optic Cable GYTA33

Product Description:

GYTA33 (Loose tube stranding, Metal strength member, Flooding jelly compound, Aluminum-polyethylene adhesive inner jacket, Single smaller round steel wire armoring, PE outer jacket)

Standards:

YD/T 901-2009 Outdoor layer stranded optical cable for telecommunications

Technical Parameters(Typical Value):


Fiber Count	Structure	Diameter (mm)	Weight (kg/km)	Tensile(N)		Crush(N)		Bending Radius(mm)	
				Long term	Short term	Long term	Short term	Static	Dynamic
2-30	1+5	12.8	268	4000	10000	3000	5000	12.5D	25D
32-36	1+6	13.2	287	4000	10000	3000	5000	12.5D	25D

Our Product Introduction

38-60	1+5	13.9	318	4000	10000	3000	5000	12.5D	25D
62-72	1+6	14.2	334	4000	10000	3000	5000	12.5D	25D
74-84	1+7	15.1	363	4000	10000	3000	5000	12.5D	25D
86-96	1+8	15.8	387	4000	10000	3000	5000	12.5D	25D
98-108	1+9	16.6	437	4000	10000	3000	5000	12.5D	25D
110-120	1+10	17.2	465	4000	10000	3000	5000	12.5D	25D
122-132	1+11	18.3	558	4000	10000	3000	5000	12.5D	25D
134-144	1+12	18.9	583	4000	10000	3000	5000	12.5D	25D
146-216	1+6+12	18.4	503	4000	10000	3000	5000	12.5D	25D
218-288	1+9+15	20.5	600	4000	10000	3000	5000	12.5D	25D



Cable structure

1. PE outer jacket
2. steel wire central members /FRP
3. steel wires around
4. FIBER JELLY
5. Loose tue
6. Aluminum tape

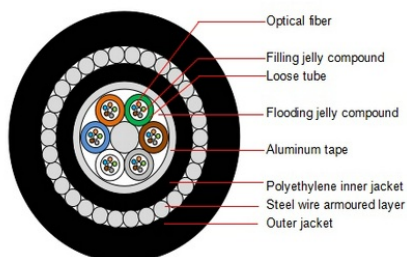

GYTA33 Cable Place Order Information


Product display

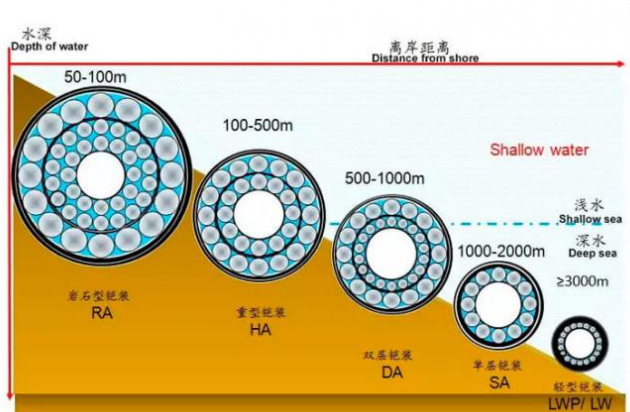

Fiber Parameters

No.	Items	Unit	Specificati on
			G.652D
1	Mode Field Diameter	μm	9.2±0.4
		μm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0

4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation(max.)	1310nm	dB/km ≤0.35
		1550nm	dB/km ≤0.21
		1380nm	dB/km ≤0.35
		1625nm	dB/km ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km ≤0.04
		1550nm 1525-1575nm	dB/km ≤0.03
		1550nm 1480-1580nm	dB/km ≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km) ≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km) ≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km) ≤20
		1550nm	ps/(nm.km) ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² ·km)	≤0.092
14	Typical value	ps/(nm ² ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

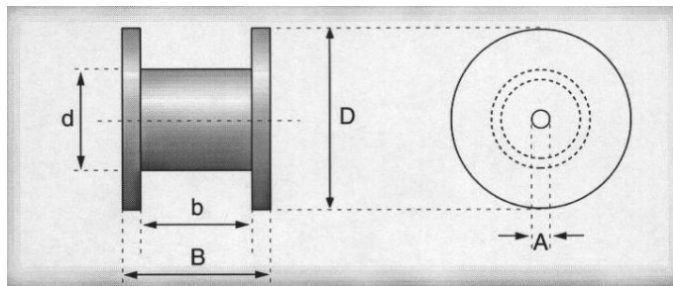

Production Supplier Profile



COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO 9000:2015, ISO 14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.


**guangzhou
fiber
cablepuls
co ltd**

+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



▲ Color Coating

▲ Color Fiber Testing

▲ Fiber to Loose Tube

▲ Stranded Loose Tube

▲ PE Sheath Coated

▲ Finished Cable Testing



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China