




## Mini ADSS ASU Fiber Optic Cables Aerial Installed 80M 120M

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)


### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ASU-120
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

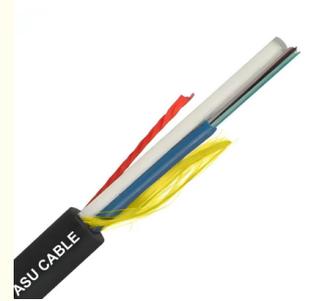

### Product Specification

- Fiber Count: 12
- Installation Method: Aerial
- Strength Member Material: FRP\*2
- Cable Diameter: 7mm/8mm
- Span: 80m-120m
- Length: 2km-5km
- Model: ASU CABLE
- Highlight: ASU Fiber Optic Cables, ADSS Fiber Optic Cables, Fiber Optic Cables 80M

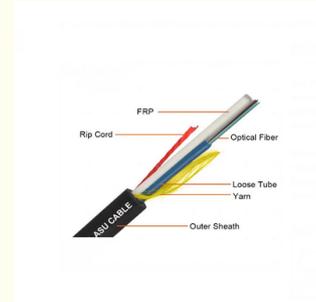


### More Images



### Product Description


Mini ADSS ASU FIBER OPTIC CABLES 80M 120M

Our Product Introduction

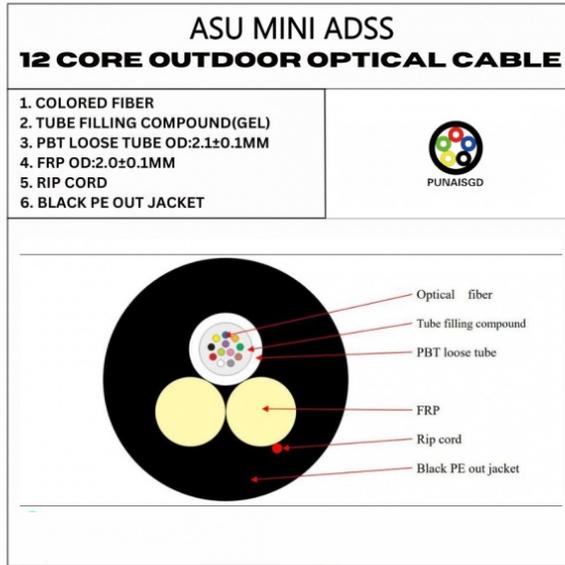

ASU fiber optic cable, also known as mini ADSS fiber optic cable, is an aerial self-supporting dielectric cable that contains one or two max loose tubes which is filled with up to 12 optical fibers (thus max 24 optical fibers in total). The fibers are protected from moisture by jelly and hydro-expandable material inside the loose tube.

It is all dielectric which has FRP strength member as a traction element, providing pull strength and avoiding electrical discharges between connections. It is much easier and lighter to handle and install compared to other outdoor cable, eliminating the need to use strings or grounding. It's widely used in FTTH fiber to the home networking.

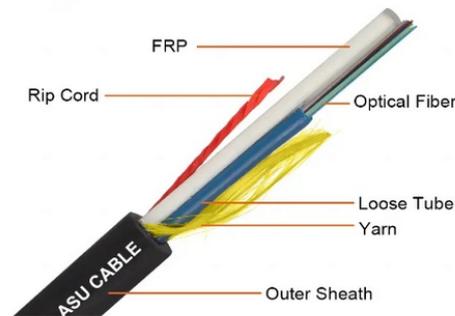

**The Technical Data of ASU Fiber Optic Cable**

No. of cable	12		24
Fiber Model	G.652D		
Loose Tube	Material	PBT	
	Diameter	2.5±0.1mm	2.8±0.1mm
	Thickness	0.32±0.05 mm	
	Color	Nature	
Strength Member	Material	FRP	
	Diameter	2.5±0.05 mm	2.5±0.1mm
Outer Sheath	Material	PE	
	Color	Black	
Cable Diameter	8.0±0.2 mm	8.5±0.2 mm	
Cable Weight	55±5.0 kg/km	65±5.0 kg/km	
Allowable Tensile Strength	1000N	1500N	
Allowable Crush Resistance	1100N/100m m	2200N/100mm	
Min. bending radius	Without Tension	10.0×Cable-φ	
	Under Maximum Tension	20.0×Cable-φ	
Temperature range (°C)	Installation	-20~+60	
	Transport&Storage	-40~+70	
	Operation	-40~+70	



## Production Supplier Profile

### COMPANY PROFILE



#### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China



+8613687956390

cotton@fibercabi