




Fiber Optic Direct Buried Cable GYTA53 72 Cores Single Mode Underground

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTA53
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km


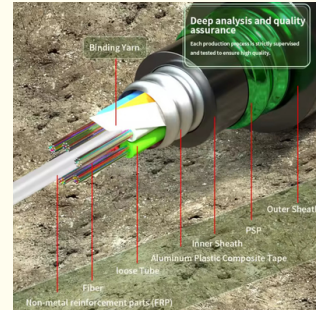


Product Specification

- Item No.: GYTA53
- Jacket Material: Double Jacket
- Fiber Type: G.652D Single Mode
- Armored Type: Double Armored
- Application: Directly Buried
- Fiber Count: 72 Cores
- Armored: Steel Tape/ALUMINUM TAPE
- Highlight: Direct Buried Cable GYTA53, Direct Buried Cable 72 Cores, Direct Buried Single Mode Cable

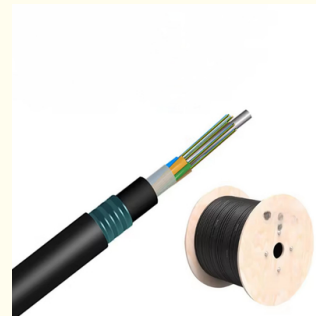

More Images



Product Description

Direct Burial Fiber Optic Cable GYTA53 72 Cores Single Mode Underground cable

GYFTA53 cable is a type of outdoor, armoured fiber optic cable designed for long-distance, high-capacity communication networks. It is commonly used in both aerial and underground installations.

The cable features a central tube design with stranded loose tubes and water-blocking gel. The loose tubes provide protection to the fibers and allow for easy installation and maintenance. The gel provides water resistance, making the cable suitable for deployment in harsh environmental conditions.

GYTA53 is the steel tape armored outdoor fiber optic cable used for direct buried. single mode GYTA53 fiber optic cable and multimode GYTA53 fiber optic cables; fiber counts from 2 to 432.

Applications

These corrugated steel tape and aluminum tape armored and double sheath cables are suitable for installation in harsh environments where mechanical impact on the cable is to be expected.e.g. in direct buried application. They are also suitable for installation

Our Product Introduction

in ducts where the rodent resistance is to be expected or the moisture resistance is expected.


Features

Up to 432 fiber cores.


The loose tube stranding technology make the fibers have good secondary excess length and allow the fibers free movement in the tube, which keeps the fiber stress-free while the cable is subjected to longitudinal stress.

Corrugated steel tape armored and double PE sheath providing excellent crush resistance and rodent resistance.

Metal strength member provides excellent strain performance.

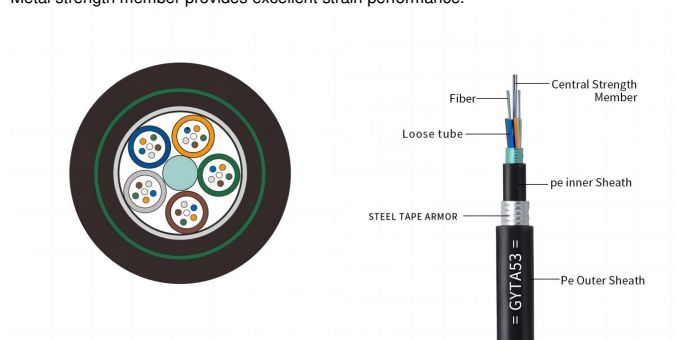

GYTA53 Cable Place Order Information

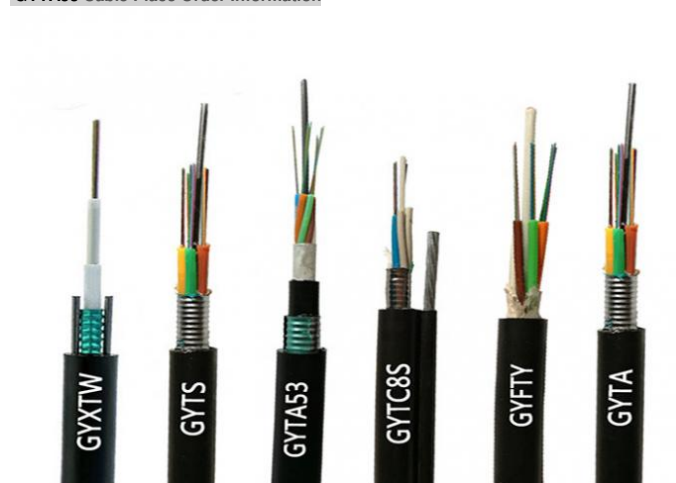

CABLE DATA


fiber count	fibers per tube	loose tube diameter	CSM diameter	nominal tickness of outer jacket	cable diameter	cable weight
4	4	1.8±0.1	1.4/1.4	1.6	11.5±0.2	140
6	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
8	8	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
12	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
24	6	1.9±0.1	1.4/1.4	1.6	11.5±0.2	140
36	12	1.9±0.1	1.6/1.6	1.6	11.5±0.2	140
48	12	2.2±0.1	1.6/1.6	1.6	12.2±0.2	140
72	12	2.2±0.1	1.6/3.5	1.6	12.2±0.2	150
96	12	2.2±0.1	2.0/2.0	1.6	12.2±0.2	160
144	12	2.2±0.1	2.0/6.4	1.8	13.8±0.2	180

Fiber Parameters


No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm 1550nm	μm μm
2	Cladding Diameter		μm
3	Cladding Non-Circularity		%
4	Core-Cladding Concentricity Error		μm
5	Coating Diameter		μm
6	Coating Non-Circularity		%
7	Cladding-Coating Concentricity Error		μm
8	Cable Cutoff Wavelength		nm
9	Attenuation(max.)	1310nm 1550nm 1380nm 1625nm	dB/km dB/km dB/km dB/km
10	Attenuation and wavelength	1310nm 1285-1330nm 1550nm 1525-1575nm 1550nm 1480-1580nm	dB/km dB/km dB/km
11	Dispersion	1288-1339nm 1271-1360nm 1480-1580nm 1550nm	ps/(nm.km) ps/(nm.km) ps/(nm.km) ps/(nm.km)
12	Zero dispersion wavelength		Nm
13	Zero dispersion slope		ps/(nm ² ·km)
14	Typical value		ps/(nm ² ·km)
15	Largest individual fiber		Ps/√ km
16	Link design values		Ps/√ km
17	Two way average		1310nm-1550

Cable Marking&Fibers Colors


COMPANY Fiber cable name N*cores G.652D 2024 XXXM
*The marking is printed every 1 meter;
**"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..
Also can according to client cable marking.

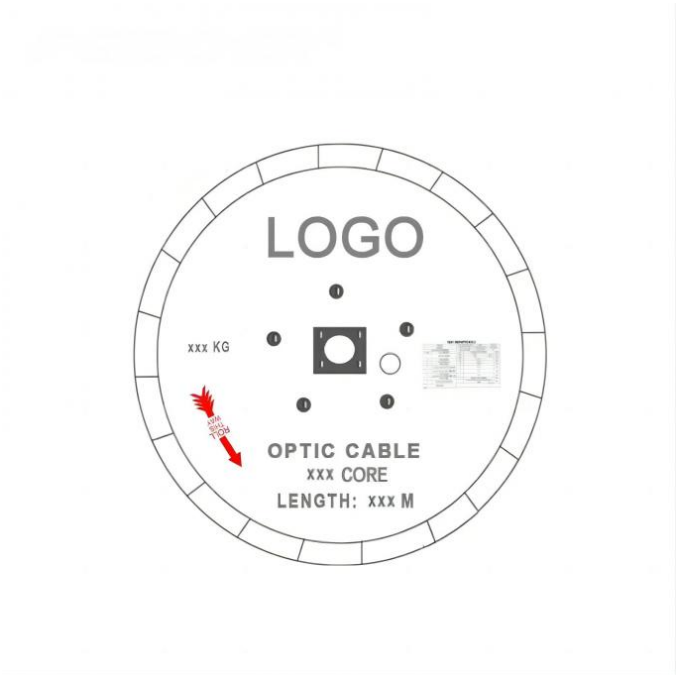

Production Supplier Profile

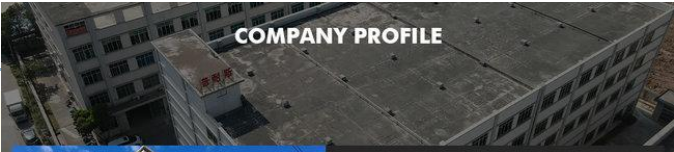

COMPANY PROFILE




ABOUT FIBER

Guangzhou fiber cablepuls co ,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China