



## Fiber Direct Buried Cable GYTA53 12 Cores Double Armored Underground For Highway

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)


### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTA53-12b1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




### Product Specification

- Item No.: GYTA53-12b1.3
- Application: Underground
- Armored: Steel Tape/ALUMINUM TAPE
- Application: Outdoor
- Strength Member: FRP/STEEL WIRE
- WARRANTY: 25 YEARS
- Highlight: Direct Buried Fiber Cable GYTA53, Highway Direct Buried Cable, Double Armored Direct Buried Cable



### More Images



### Product Description

#### Direct Burial Fiber Optic Cable GYTA53 12 Cores GYTA53 double Armored Underground Cable For Highway

The GYTA53 is designed to deliver a high fiber count with the flexibility and versatility required for today's most demanding installations, including direct burial. Up to 144 cores of optical fiber.


#### Applications

These corrugated steel tape and aluminum tape armored and double sheath cables are suitable for installation in harsh environments where mechanical impact on the cable is to be expected.e.g. in direct buried application. They are also suitable for installation in ducts where the rodent resistance is to be expected or the moisture resistance is expected.


#### Main features:

1. Loose tube gel filling structure provides excellent fiber protection.
2. Double sheathed single armouring (GYTY53) and double sheathed double armouring.
3. (GYTA53) for rat prevention and direct burial.
4. Uv and moisture-proof design

Our Product Introduction

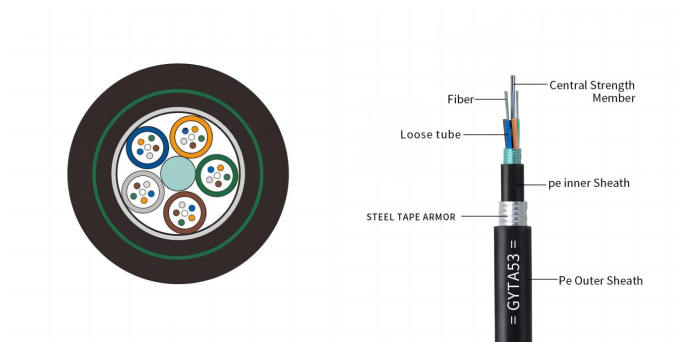

#### GYTA53 Cable Place Order Information

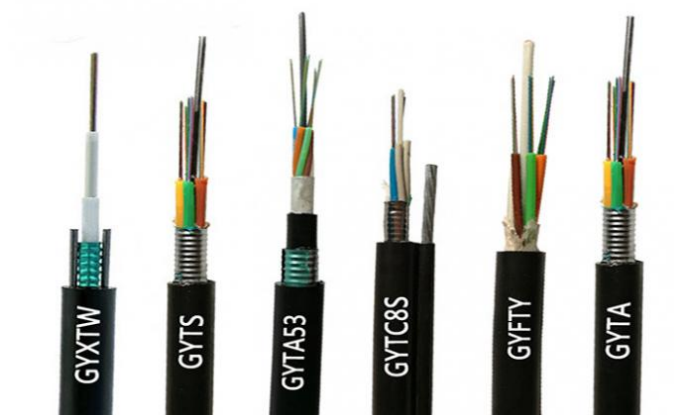

#### CABLE DATA

fiber count	fibers per tube	loose tube diameter	CSM diameter	nominal tickness of outer jacket	cable diameter	cable weight
4	4	1.8±0.1	1.4/1.4	1.6	11.5±0.2	140
6	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
8	8	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
12	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
24	6	1.9±0.1	1.4/1.4	1.6	11.5±0.2	140
36	12	1.9±0.1	1.6/1.6	1.6	11.5±0.2	140
48	12	2.2±0.1	1.6/1.6	1.6	12.2±0.2	140
72	12	2.2±0.1	1.6/3.5	1.6	12.2±0.2	150
96	12	2.2±0.1	2.0/2.0	1.6	12.2±0.2	160
144	12	2.2±0.1	2.0/6.4	1.8	13.8±0.2	180

#### Fiber Parameters

Fiber Parameters			Unit	Specification
No.	Items			G.652D
1	Mode Field Diameter	1310nm 1550nm	μm	9.2±0.4 10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ <sub>cc</sub> ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm <sup>2</sup> •km)	≤0.092
14	Typical value		ps/(nm <sup>2</sup> •km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average		1310nm-1550	≤0.01dB


#### Cable Marking&Fibers Colors

COMPANY Fiber cable name N\*cores G.652D 2024 XXXXm


\*The marking is printed every 1 meter;

\*\*\*G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

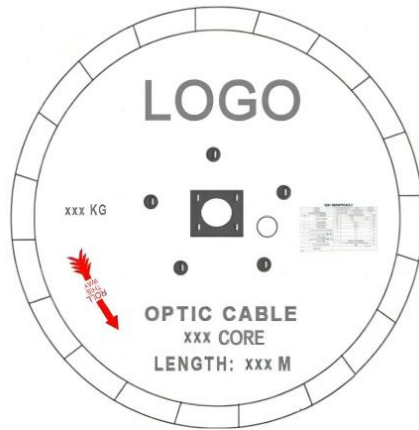

## Production Supplier Profile

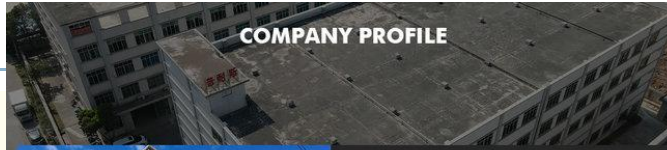

**COMPANY PROFILE**

**ABOUT FIBER**  
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong  
province,China