GYTC8S 8-Core Aerial Figure 8 Fiber Optic Cable Outdoor PE/LSZH

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S-8B1.3 Model Number:

• Minimum Order Quantity: 2km

Packaging Details: Wooden Spool /drum

. Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 100km



Product Specification

GYTC8S-8B1.3 • Item NO.: • TYPE: Fig.8 Shape Outdoor AREIAL . Application: PE/LSZH Jacket Material: • Fiber Type: G.652D

• Strength Member: Messenger Wires 8.5*12.5mm Outer Diameter: Warranty Period: 25 Years

• Highlight: Figure 8 Armoured Fiber Optic Cable,

Gytc8s Armoured Fiber Optic Cable, **Aerial Armoured Fiber Optic Cable**



More Images






Aerial Figure 8 Armoured Fiber Optic Cable GYTC8S 8 Cores Outdoor

Product Specifications

Item NO.	GYTC8S-8B1.3
ТҮРЕ	Fig.8 shape
Application	Outdoor AERIAL
Jacket Material	PE/LSZH
Fiber Type	G.652D
Strength member	Messenger wires
Outer Diameter	8.5*12.5mm
Warranty Period	25 years

Product Description

Aerial Figure 8 Fiber Optic Cable GYTC8S 8 Cores armored outdoor optical fiber cable with metal steel strand central strength member, jelly filled, fiber contained loose tube and PP filler stranded.

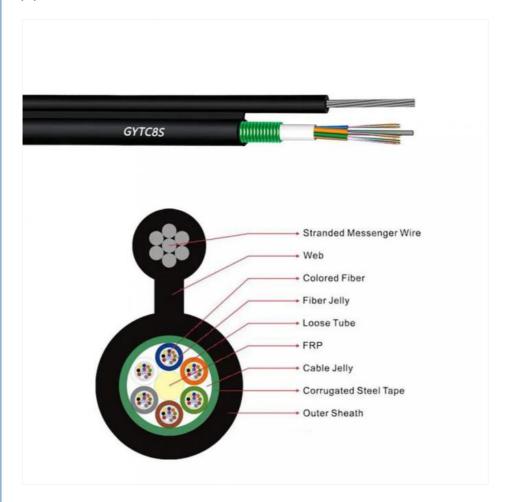

Technical Specifications

Number of fibers: 6-8, 10-12, 14-24, 30-72

Design: Central Steel wires + Stranded Loose Multi-tube Cable

Fiber type: Single mode G.652.D

Strength Member: PSP Loose Tube: PBT

Water Blocking Layer: Water Blocking tape

Additional Strength Member: PSP

Outer Sheath: PE

Cable Diameter: 6.8*9.2*18mm; 7*9.5*18.5mm


Cable Weight: 210-250kg

Attenuation coefficient: @1310nm ≤0.35dB; @1550nm ≤0.2dB

Min. bending radius Without Tension: 10.0 \times Cable- $\!\phi$

Min. bending radius Under Maximum Tension: 20.0 \times Cable- ϕ

GYTC8S Cable Order Information

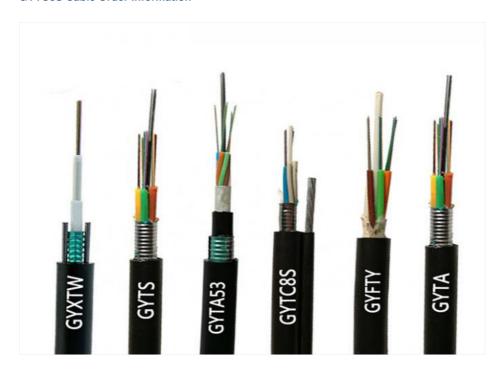

No. of cable	12	24
Fiber Model	G652D	
Design (StrengthMember+Tube&Filler)	1+5	
Central Strength Member	Material	FRP
Diameter(±0.05)mm	1.5	

Cable Marking & Fibers Colors


COMPANY Fiber cable name N*cores G.652D 2024 XXXXm

The marking is printed every 1 meter; "G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber.

Custom cable marking available according to client requirements.



Production Supplier Profile

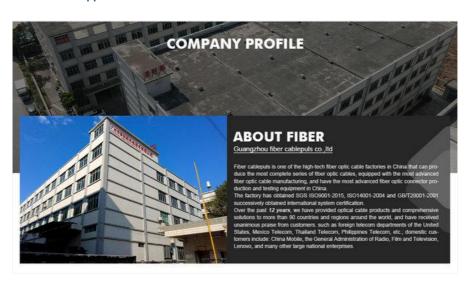



How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province,China