




Aerial Figure 8 Communication Fiber Optic Cable Gytc8s Gyxtc8s 1km

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTC8S-12B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Item NO.: GYTC8S-12B1.3
- TYPE: Fig.8 Shape
- Strength Member: Messenger Wires *7pcs
- Application: Self-surporting
- Jacket Material: PE
- Outer Diameter: 8.5*12.5mm
- Highlight: Aerial Communication Fiber Optic Cable,
Fiber Optic Cable Gytc8s,
Communication Fiber Optic Cable 1km



More Images




Product Description

Aerial Figure.8 Fiber Optic Cable Communication Cable Gytc8s Gyxtc8s Figure 8 Fiber Optical Cable 1km Price

Technical Data



- Fiber: Up to 288, Gel-filled.
Fiber Types: Single-mode and multimode.
Cable Constructions: S-Z Stranded loose tube.
Strength Member: Stranded steel wires.
Sheath Options: Single PE Sheath.
Armor: None (GYTC8Y)/GYTC8A(Aluminum Tape)/GYTC8S(Steel Tape).
Operating Temperature: -40~+70°C.
Compliances: In Accordance with IEC, ITU and EIA standards.
Features:
* Excellent Mechanical and environmental performance.
* Good water resistance performance.
* Easy to install.
* Gel-filled loose tube protect the fiber well.

Our Product Introduction



Model: GYTC8Y
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: None
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 5.1*10.2mm
 Package: 4km/drum
 Weight: 47KG/KM

Model: GYTC8S
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: Steel Tape
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 7.6*14.5mm
 Package: 4km/drum
 Weight: 117KG/KM



Model: GYTC8Y
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: None
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.1*16.9mm
 Package: 4km/drum
 Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber : Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Aarmor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)


Cable Diameter: 9.5*17mm

Package: 4km/drum

Weight: 156KG/KM



GYTC8S Cable Place Order Information

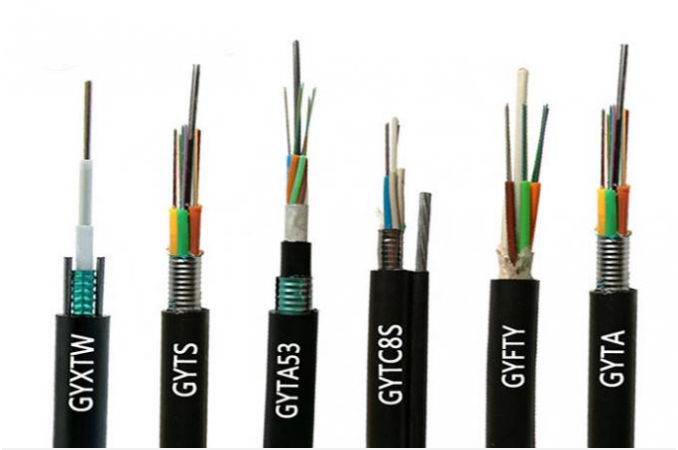

CABLE DATA

No. of cable		12 24
Fiber Model		G652D
Design (StrengthMember+Tube&Filler)		1+5
Central Strength Member	Material	FRP
	Diameter(±0.05)mm	1.5
Loose Tube	Material	PBT
	Diameter(±0.06)mm	1.7
	Thickness(±0.03)mm	0.32
	The Max.Core NO./Tube	6
Filler Rope	Material	PP
	Diameter(±0.06)mm	1.7
	NO.	3 1
Water Blocking Layer(Material)		Flooding Compound
Outer Sheath①	Material	PE
	Thickness(±0.1)mm	1.2
Outer Sheath②	Material	PE
	Thickness(±0.1)mm	1.8
Web	Material	PE
	Size(±0.1)mm	2.0*2.0
Messenger Wire	Material	Steel stranded
	Size(±0.1)mm	2.7mm(0.9mm×7)
Cable Diameter(±0.5)mm(W×H)		8.5x15.2
Cable Weight(±10)kg/km		100
Min. bending radius	Without Tension	10.0×Cable-φ
	Under Maximum Tension	20.0×Cable-φ
Temperature range (°C)	Installation	-20~+60
	Transport&Storage	-40~+70
	Operation	-40~+70


Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm

*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

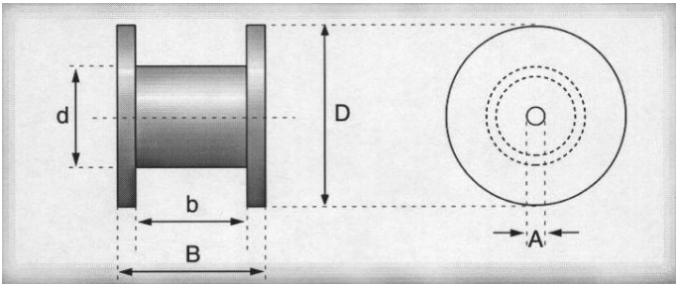

Production Supplier Profile

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successfully obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China