GYTS53 72-Core Direct Buried Fiber Optic Cable UV Moisture Resistant

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTS53 Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

• Uv Resistant: Yes Moisture Resistant:

-40°C To 90°C . Temperature Rating: Application: Underground

Jacket Material: PΕ • Fiber Count: 72 Cores

Underground Double Sheath Direct Buried . Highlight:

Cable

, Direct Buried Cable GYTS53, **Outdoor Direct Buried Fiber Cable**



More Images



Outdoor Fiber Direct Buried Cable Double Sheath GYTS53 Underground

Product Specifications

UV Resistant	Yes
Moisture Resistant	Yes
Temperature Rating	-40°C to 90°C
Application	Underground
Jacket Material	PE
Fiber Count	72 cores

Product Description

The GYTS53 outdoor double sheath fiber cable features a metal reinforcing core at its center. Loose tubes (and filler ropes) are twisted around this central strengthening core to form a compact, round cable core, with water-blocking filler occupying any gaps. The cable construction includes:

Plastic-coated steel strip wrapped longitudinally


Extruded polyethylene inner sheath

Double-sided plastic-coated steel strip (PSP) longitudinal wrapping

Final polyethylene outer sheath extrusion





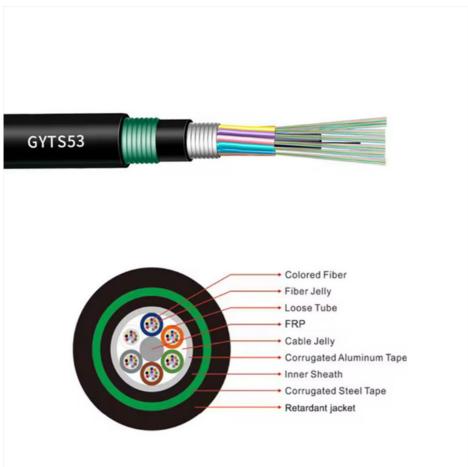


Technical Parameters

Fiber count	Structure	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Thickness of inner jacket (m
4	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1
6	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
8	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1
12	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
18	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
24	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
30	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
36	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1
48	1+6	12	2.0+0.1	1.8 /1.8	0.9 ± 0.1
60	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
72	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
84	1+7	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
96	1+8	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
108	1+9	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
120	1+10	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
132	1+11	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
144	1+12	12	2.0+0.1	2.0/2.0	0.9 ± 0.1
288	1+9+15	12	2.0+0.1	2.0/2.0	0.9 ± 0.1

Manufacturing Facility



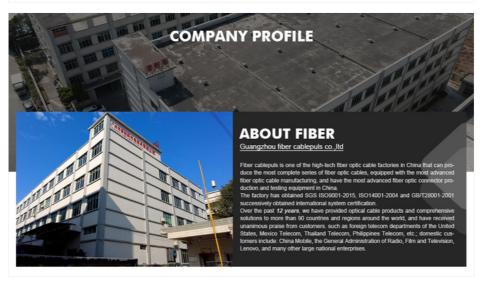



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





Frequently Asked Questions

Why choose us?

We are the manufacturer, located in Guangzhou, China, operating since 2011, serving domestic and international markets. Our factory employs 11-50 skilled professionals dedicated to quality production.

How do we guarantee quality?

Pre-production samples before mass production

Final inspection before shipment

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own shipping forwarder, we can arrange transportation for you.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

What services do we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currencies: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese





+8613687956390

cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China