Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTA33 Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

• Structure: Stranded Loose Tube

 Loose Tube Material: PBT • Outer Sheath Color: Black

Steel Wire Tape • Armour: · Armor Layer: Aluminum Tape

• Temperature Range: -20~+60

• Highlight: stranded duct fiber optic cable, stranded outdoor fiber optic cable



More Images





Our Product Introduction

GYTA33 12 24 36 Core Direct Burial Armored Submarine Loose Tube Optic Cable

Product Attributes

Attribute	Value
Structure	Stranded loose tube
Loose tube material	PBT
Outer Sheath Color	Black
Armour	Steel wire tape
Armor Layer	Aluminum Tape
Temperature range	-20°C to +60°C

Product Description

The underwater fiber cable GYTA33, 2-72 fibers, features a central strength member (steel), jelly filled fiber contained loose tube and PP filler (if necessary) stranded construction, with water blocking jelly, copolymer coated aluminum tape, PE inner sheath, armored by a layer of steel wires, and PE outer sheath. Uses G652D SM fiber with detailed specifications available upon request.



Key Features

Precise fiber excess length control ensures superior mechanical and temperature performance


Special filling gel in loose tubes provides optimal fiber protection


Complete water blocking ensures reliable moisture-proof and water block performance

Corrosion-resistant phosphated steel wire with high Young's modulus as central strength member delivers exceptional tensile strength


Longitudinal armor with double-side coated aluminum tape and stranded steel wires provides high crush resistance, tensile strength, bulletproof properties, and heavy-duty direct burial/underwater installation capability

Cable Structure

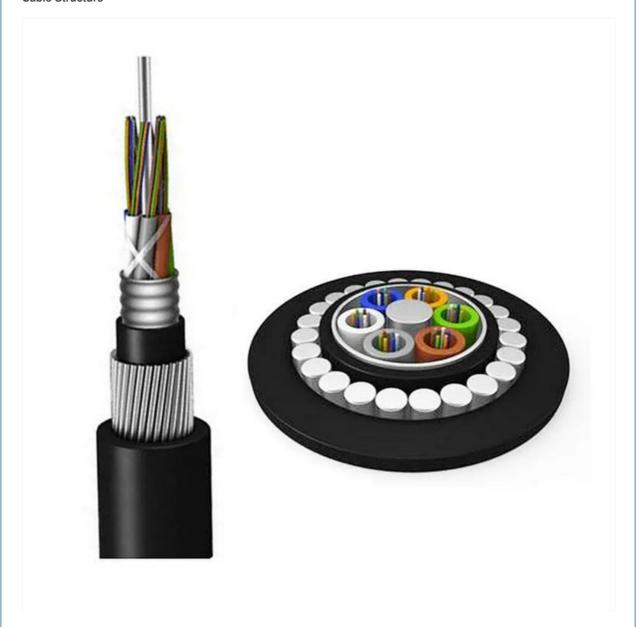

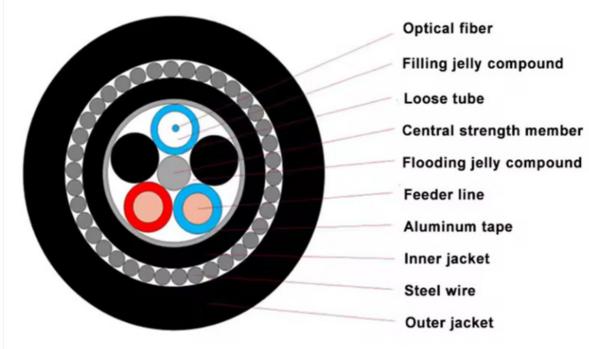



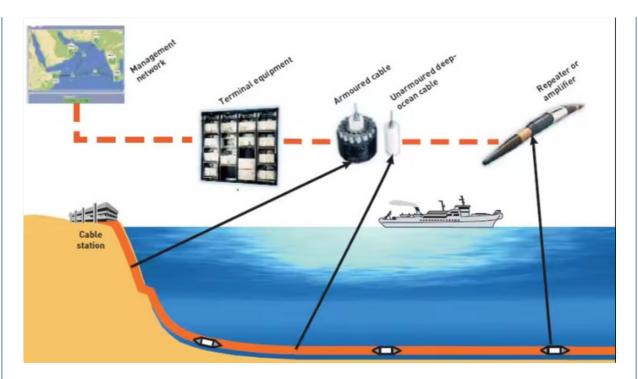


Product Parameters

Cable Type	Fiber Count	Structure	Cable Diameter (mm)	Cable Weight (kg/km)
GYTA33	2-30	1+5	12.8	268
	32-36	1+6	13.2	287
	38-60	1+5	13.9	318
	62-72	1+6	14.2	334
	72-84	1+7	15.1	363
	86-96	1+8	15.1	387
	98-108	1+9	16.6	437
	110-120	1+10	17.2	465
	122-132	1+11	18.3	558
	134-144	1+12	18.9	583
	146-216	1+6+12	18.4	503
	218-288	1+9+15	20.5	600

Our Factory



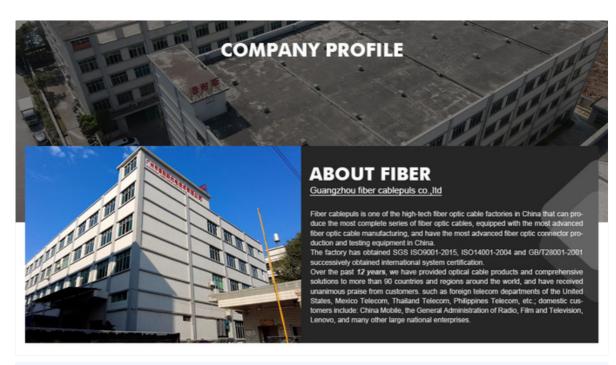














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



▲ Color Coating



▲ Color Fiber Testing



▲ Fiber to Loose Tube



△ Stranded Loose Tube



▲ Finished Cable Testing



HOT-SALE PRODUCT





Frequently Asked Questions

Why choose us?

We are the manufacturer, located in Guangzhou, China, operating since 2011, primarily serving the domestic market. Our factory employs 11-50 skilled professionals dedicated to producing high-quality fiber optic cables.

How can we guarantee quality?

We implement strict quality control measures including pre-production samples before mass production and final inspection before shipment to ensure all products meet our high standards.

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own shipping forwarder, we can assist with logistics arrangements.

Can you do OEM for me?

We accept all OEM orders. Simply contact us with your design requirements and we'll provide a competitive quote and produce samples for your approval.

What services can we provide?

We offer flexible delivery terms (FOB, CIF, EXW), accept multiple payment currencies (USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF) and payment methods (T/T, L/C, D/P D/A, PayPal, Western Union, Escrow), with support in English and Chinese.

+8613687956390 cotton@fibercablepuls.com fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China