




## ASU Cable G652D ADSS Fiber Optic Cable 12 Core 80M Span FRP

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ASU
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

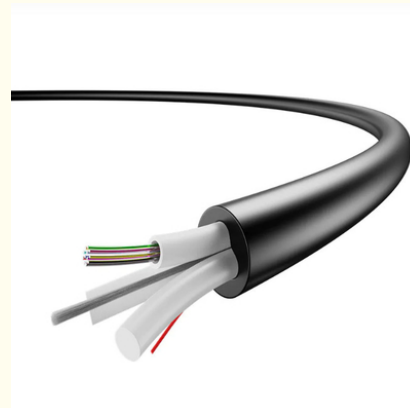


### Product Specification

- Model: ASU CABLE
- Outsheath Color: Black
- Fiber Count: 4/6/8/12
- Strength Member Material: FRP\*2
- Cable Diameter: 7mm/8mm
- Span: 80m-120m
- Application: Telecommunication,Aerial,Telecom,Network
- Length: 2km-5km
- Highlight: **Mini ASU Cable, G652D ASU Cable, 80M ADSS Fiber Cable**



### More Images



Product Description


Mini ASU Cable G652D ADSS Fiber Cable 12 Core 80M Span 2 FRP Strength Member


Product Specifications

Attribute	Value
Model	ASU CABLE
Outsheath Color	Black
Fiber Count	4/6/8/12
Strength Member Material	FRP*2
Cable Diameter	7mm/8mm
Span	80m-120m
Application	Telecommunication, Aerial, Telecom, Network
Length	2km-5km

Product Description

The G.652D Aerial Self-Supported (ASU) Fiber Optic Cable features a loose tube structure with water-resistant gel compound for optimal fiber protection. Two parallel fiber-reinforced plastic (FRP) strength members provide structural support, while the PE outer sheath ensures durability. This cable is specifically designed for aerial installation in long-distance communication networks.

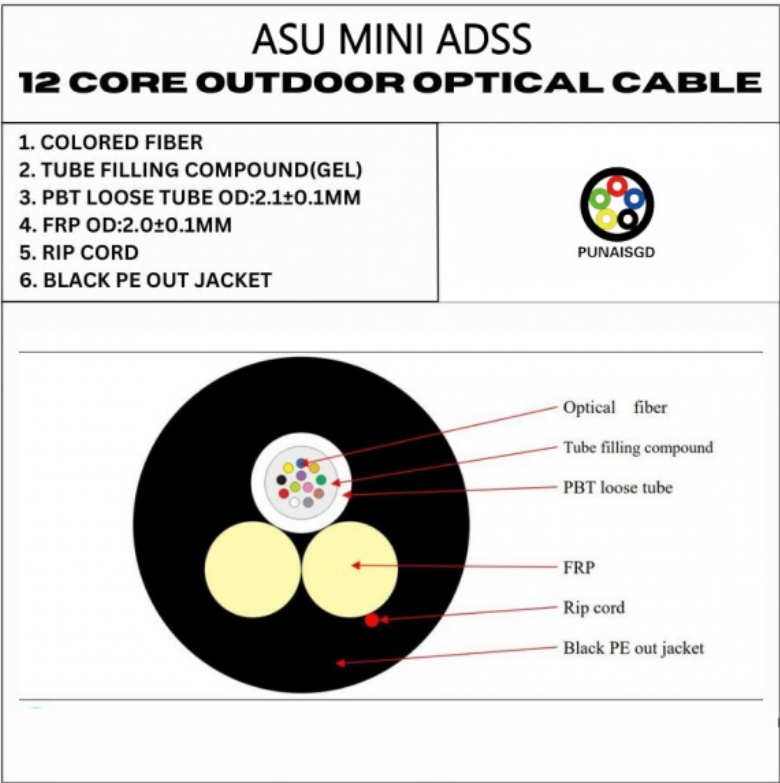

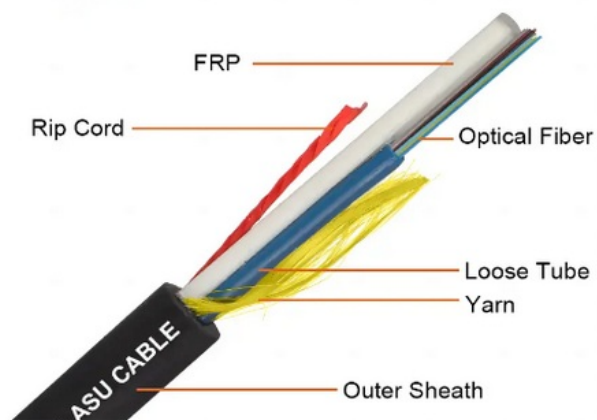

#### Technical Specifications

No. of cable	12	24
Fiber Model	G.652D	
Loose Tube Material	PBT	
Loose Tube Diameter	2.5±0.1mm	2.8±0.1mm
Strength Member Material	FRP	
Outer Sheath Material	PE	
Cable Diameter	8.0±0.2 mm	8.5±0.2 mm
Allowable Tensile Strength	1000N	1500N
Temperature Range (Operation)	-40°C to +70°C	

#### Fiber Parameters

Parameter	Unit	Specification
Mode Field Diameter (1310nm)	μm	9.2±0.4
Cladding Diameter	μm	125.0±1.0
Attenuation (1550nm)	dB/km	≤0.21
Zero Dispersion Wavelength	nm	1300-1324



### Ordering Information


Send your purchase inquiry to [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)

Our sales team will confirm product specifications and requirements


Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping arrangements made 2 weeks before completion

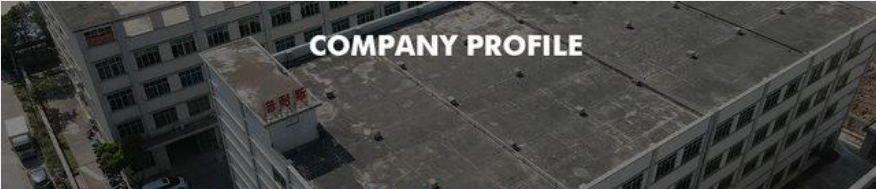

## COMPANY PROFILE



## ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.





## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



**guangzhou fiber cablepuls co ltd**



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China