ġ.

Aerial Mini Figure 8 Fiber Optic Cable 4 Core GYXTC8Y For Indoor And Outdoor

Basic Information

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS · Certification: ISO/CE/ROSH

Model Number: gyxtc8y-4B1.3 Minimum Order Quantity: 2km

• Price: negotiable

Packaging Details: Wooden Spool /drum • Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km Supply Ability:



Product Specification

Item NO.: Gyxtc8y-4b1.3 • TYPE: Mini Fig.8 Shape

• Strength Member: Messenger Wires *7pcs/STEEL WIRE

• Application: OVERHEAD Jacket Material: PE/LSZH • Fiber: G652D • Od: 4.0MM

• Highlight: GYXTC8Y Figure 8 Fiber Optic Cable,

GYXTC8Y Aerial Fiber Optic Cable, Aerial Fiber Optic Cable 4 Core



More Images



Product Description


Aerial Mini Figure.8 Fiber Optic Cable 4 Core GYXTC8Y For Indoor And Outdoor

This set unit and galvanized steel messenger are covered with polyethylene outer jacket.

GYXTC8Y Self-supported mini figure 8 optical cable with fibers placed in jelly filled loose buffer tube, the loose tube covering the aramid yarn.

Characteristics

- Good mechanical and temperature performance
 High strength loose tube that is hydrolysis resistant
- 3. Special tube filling compound ensure a critical protection of fiber
- 4. Crush resistance and flexibility

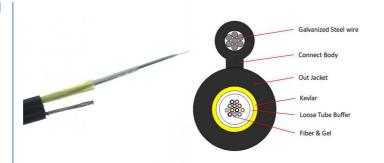





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath


Armor: Steel Tape

Tension Strength: 1000(Short term)

300(Long ten

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm


Package: 4km/drum Weight: 142KG/KM



GYTC8S Cable Place Order Information



Fiber count	24 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

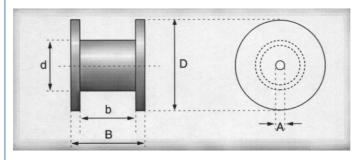

Production Supplier Profile











OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China