GYXTC8Y Mini Figure 8 Fiber Optic Cable 4 Core Aerial Indoor Outdoor

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: Model Number: gyxtc8y-4B1.3

• Minimum Order Quantity: 2km • Price: negotiable

Wooden Spool /drum Packaging Details:

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

100km • Supply Ability:



Product Specification

• Item NO.: Gyxtc8y-4b1.3 • TYPE: Mini Fig.8 Shape

Messenger Wires *7pcs/STEEL WIRE • Strength Member:

OVERHEAD · Application: PE/LSZH · Jacket Material: • Fiber: G652D • Od: 4.0MM

• Highlight: GYXTC8Y Figure 8 Fiber Optic Cable,

GYXTC8Y Aerial Fiber Optic Cable, Aerial Fiber Optic Cable 4 Core



More Images



Aerial Mini Figure 8 Fiber Optic Cable 4 Core GYXTC8Y For Indoor And Outdoor

Product Specifications

Attribute	Value
Item NO.	gyxtc8y-4b1.3
TYPE	mini Fig.8 shape
Strength member	messenger wires *7pcs/STEEL WIRE
Application	OVERHEAD
Jacket Material	PE/LSZH
Fiber	G652D
OD	4.0MM

Product Description

GYXTC8Y Self-supported mini figure 8 optical cable with fibers placed in jelly filled loose buffer tube, the loose tube covering the aramid yarn. This set unit and galvanized steel messenger are covered with polyethylene outer jacket.

Key Characteristics


Good mechanical and temperature performance

High strength loose tube that is hydrolysis resistant

Special tube filling compound ensure a critical protection of fiber

Crush resistance and flexibility



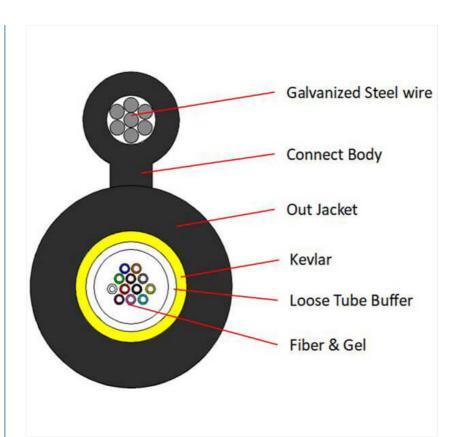





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled


Jacket: Single HDPE Sheath Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm Tension Strength: 3000(Short term)


1000(Long term)

Cable Diameter: 9.5*17mm


Package: 4km/drum Weight: 156KG/KM




GYTC8S Cable Order Information

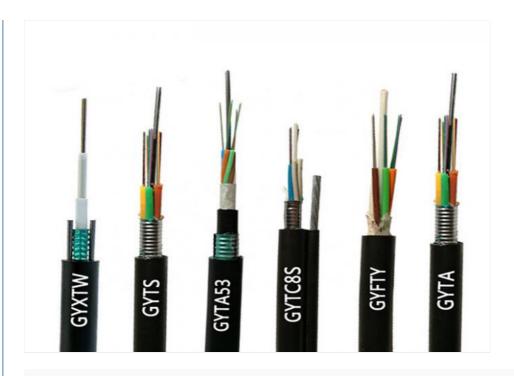

Fiber count	24 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance Long term	300 (N/100MM)
Crush Resistance Short term	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

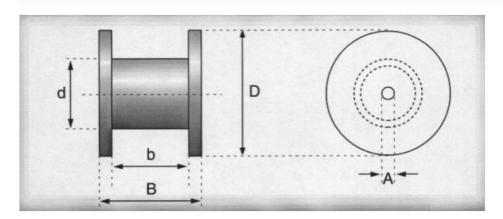

Manufacturer Profile

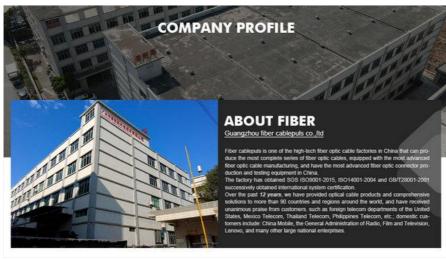



Custom Order Process

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping





925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China