




Aerial Indoor FTTH Drop Cable 1 Core 2 Core 4 Cores GJXH

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GJXH
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 1000km




Product Specification

- Laying Method: Aerial
- Applications: Indoor Ftth Cabling
- Cable Weight: 32KG±1KG
- Fiber Count: 1-4 Fibers
- Messenger Size: 1.0mm/1.1mm/1.2mm
- Warraty: 1 Year
- Steel: 0.45mm
- Construction: 2pcs Steels
- Highlight: 4 Cores FTTH Drop Cable,
GJXH FTTH Drop Cable,
Aerial FTTH Drop Cable



More Images

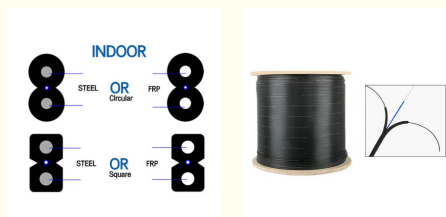

Product Description



FTTH DROP CABLE INDOOR 1 Core 2 Core 4 Cores GJXH

cable structure

1. STEEL WIRE 2.FIBER 3. LSZH JACKAGE
- diameter of cable: (2.0±0.2)X(5.0±0.2)mm
type fiber:Singlemode G.657A
2KM/PLYWOOD REEL
REEL SIZE: 40*40*37cm
G.W.: 42KG/REEL 2KM/REEL
20KG/KM

Phosphating steel wire :1 *1.0 mm
Phosphating steel wire: 2*0.45 mm

Our Product Introduction

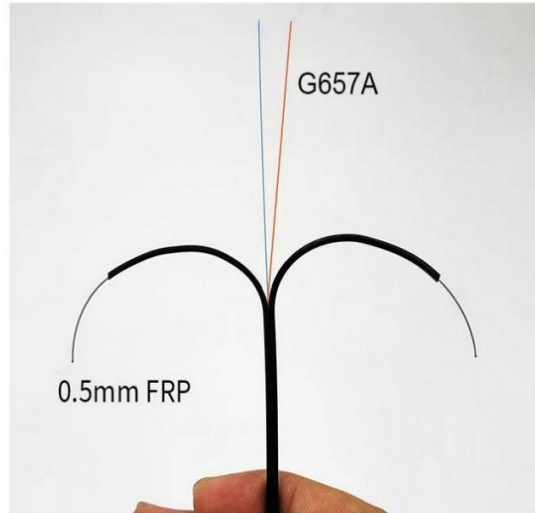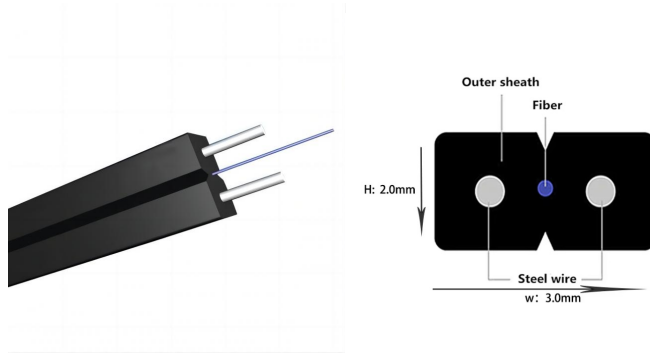

PRINTING ON SHEATH: **CABLEPULS 2024 FTTH DROP CABLE XXCORE(G.657A) XXXXm**


*The marking is printed every 1 meter;

- The color of marking is white, but if the remarking is necessary, the yellow color marking shall be printed newly on a different position.
- An occasional unclear of length marking is permitted if both of the neighboring markings are clear;
- The both cable ends are sealed with heat shrinkable end caps to prevent water ingress.


Item		Unit	Specification
Fier Tyoe		G652D	G652D
Mode filed Diameter	1310n m	μm	9.2±0.4
	1550n m	μm	10.4±0.8
Cladding diameter		μm	125.0±0.1
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245±7
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		μm	≤1260
Attenuation Coefficient	1310n m	db/km	≤0.36
	1550n m	db/km	≤0.22
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652

Production Supplier Profile

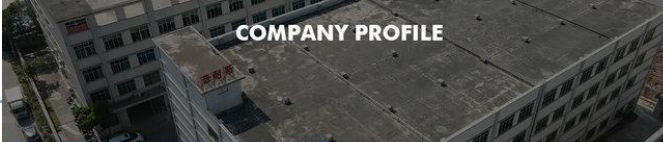

COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 30 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China