FTTH Drop Cable GJXH-4G657A Indoor 1-4 Fibers LSZH **Jacket**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GJXH-4G657A Model Number:

• Minimum Order Quantity: 2km • Price: negotiate


Wooden Spool /drum Packaging Details:

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 1000km



Product Specification

MODEL: GJXH-4G657A · Applications: Indoor Ftth 0.45mm Steel: White Or Black Jacket: • Fiber Count: 1-4 Fibers • Cable Weight: 20KG±1KG

• Construction: 2pcs Steels OR FRP . Highlight: Optical FTTH Drop Cable, G652D FTTH Drop Cable, FTTH Drop Cable 4CORE

More Images





Optical FTTH Drop Cable Ftth To Home G652D G657A Gjxh GJFXH GJYXCH 1FO 4CORE

Product Specifications

Attribute	Value
MODEL	GJXH-4G657A
Applications	indoor ftth
Steel	0.45mm
Jacket	white or black
Fiber Count	1-4 fibers
Cable Weight	20KG±1KG
Construction	2pcs steels OR FRP

Product Overview

FTTH DROP Fiber Optic CABLE Indoor Ftth To Home Cable Drop Optical Fibers G652D G657A Gjxh GJFXH GJYXCH 1FO 4CORE

This specification covers the general requirements and performance of cable for FTTH, including optical characteristics, mechanical characteristics, and geometrical characteristics.

Key Features

UV proof LSZH cable jacket, durable

Fiber cores protected by FRP or Steel wires

G652D, or G657 A1/A2 fiber core options

Apply in outdoor, indoor and drain system ftth line distribution

Good tensile and crush load

Fire resistant protection

Competitive price

Cable Structure

STEEL WIRE

FIBER


LSZH JACKET


Diameter of cable: $(2.0\pm0.2)X(5.0\pm0.2)mm$

Type fiber: Singlemode G.657A 2KM/PLYWOOD REEL REEL SIZE: 40*40*37cm G.W.: 42KG/REEL 2KM/REEL

20KG/KM

Phosphating steel wire: 1 *1.0 mm Phosphating steel wire: 2*0.45 mm

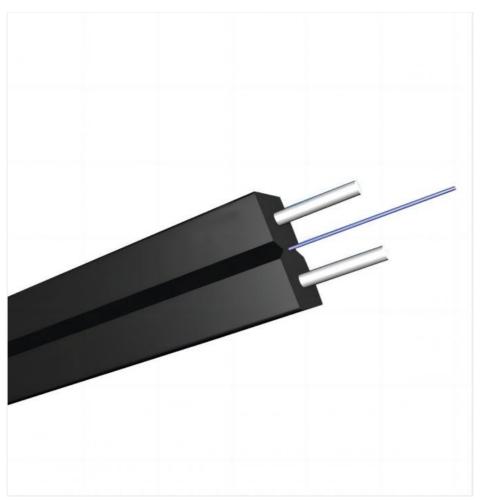

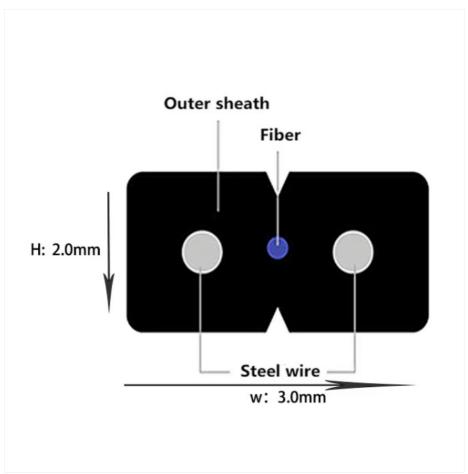




Technical Specifications

Cable Type	Fiber Count	Cable Size mm	Cable Weight Kg/km	Tensile Strength Long/Short term N
GJXH-1	1	2.0*3.0±0.2	9.0	40/80
GJXH-2	2	2.0*3.0±0.2	9.0	40/80
GJXH-4	4	2.0*3.0±0.2	9.0	40/80
GJXH-6	6	2.0*3.0±0.2	9.0	40/80
GJXH-8	8	2.5*3.5±0.2	11.0	40/80
GJXH-12	12	2.5*3.5±0.2	11.0	40/80

Item	Unit	Specification
Fiber Type		G652D
Mode field Diameter	1310nm μm	9.2±0.4
	1550nm μm	10.4±0.8
Cladding diameter	μm	125.0±0.1
Cladding non-circularity	%	≤1.0
Core/cladding concentricity error	μm	≤0.5
Coating diameter	μm	245±7
Coating/cladding concentricity error	μm	≤12
Cable cut-off wavelength	μm	≤1260
Attenuation Coefficient	1310nm db/km	≤0.36
	1550nm db/km	≤0.22
Proof stress level	kpsi	≥100

Manufacturer Information

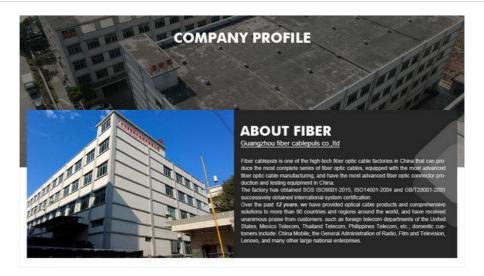



Ordering Process

Send your purchase intention to our email: ${\bf cotton@fibercablepuls.com}$

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China