

GYFXTY 12 Core Single Mode Outdoor Fiber Optic Cable





Certification: ISO/CE/ROSHModel Number: GYFXTY-12b1.3

• Minimum Order Quantity: 2km

• Price: negotiable


Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



# **Product Specification**

Item No: GYFXTY-12B1.3
Structure: Central Tube
Strength Member: FRP\*0.7mm 2pcs
Armor: Unarmored
Outer Jacket Material: PE(Black)
OD: 7MM

• Lift Time: More Than 20 Years

• Highlight: 12 cores duct fiber optic cable,

12 cores outdoor fiber optic cable,

frp duct fiber optic cable



# More Images





Our Product Introduction

### **Product Description**

### Outdoor Fiber Optic Cable GYFXY 12 Cores Single Mode Overhead Un-armored Cable

### **Product Specifications**

Attribute	Value
Item No	GYFXTY-12B1.3
Structure	Central Tube
Strength Member	FRP*0.7mm 2pcs
Armor	Unarmored
Outer Jacket Material	PE (Black)
OD	7MM
Lift Time	More Than 20 years

#### **Product Description**

The fibers (250µm) are positioned in a loose tube made of high modulus plastic. The tube is filled with water-resistant filling compound, and two parallel Fiber Reinforced Plastics (FRP) are embedded in the outer black PE jacket.

#### **Key Characteristics**

Excellent mechanical and temperature performance

High strength loose tube with hydrolysis resistance

Special tube filling compound provides critical fiber protection

Two parallel FRP ensure superior tensile strength

Compact diameter and lightweight for easy installation

Cost-effective uni-tube structure for multiple applications

## **Technical Features**


**Fiber:** 2-24 fibers G652D/G657A1/G657A2 **Structure:** Uni-loose tube with gel filled

Armor: Non-metal armored

Strength Member: Embedded two parallel FRP

Outer Jacket: Black UV- and moisture-resistant polyethylene (PE)

Applications: Pipeline, direct burial, aerial installation

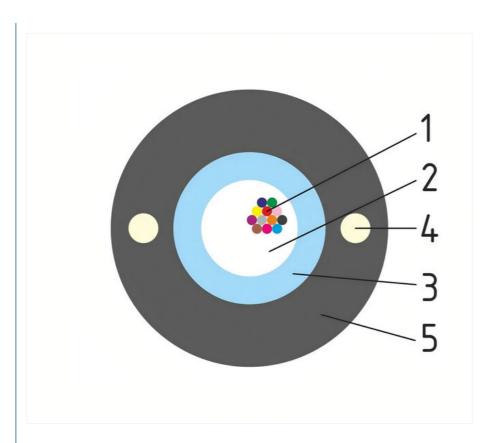




## **Cable Technical Data**

Cable Type	Fiber Count	Cable Diameter (mm)	Cable Weight (kg/km)	Tensile Strength (N) Long/Short Term	Crush Resistance (N) Long/Short Term	Bending Radius (mm) Static/Dynamic
GYFXY	2-12	5.5/6.0	55	600/1500	300/1000	10D/20D

GYFXY 2-12 6.5/7.0 60 600/1500 300/1000 10D/20D

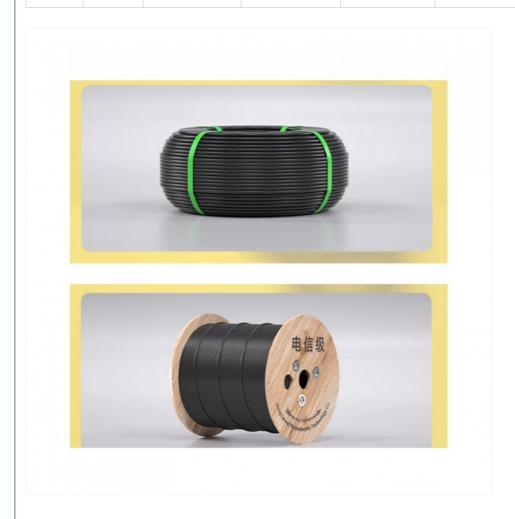

#### **OEM & Customized Order Process**


Send your purchase intention to our email:  ${\bf cotton@fibercable puls.com}$ 

 $Our \ sales \ team \ will \ contact \ you \ to \ confirm \ product \ specifications, \ packaging, \ printing, \ quantity, \ and \ other \ requirements$ 

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

Two weeks before production completion, we will notify you to arrange shipping

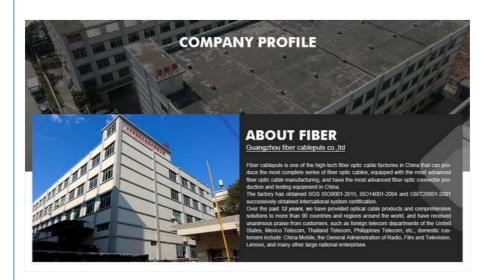





# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China