



guangzhou fiber cablepuls co ltd
fiberoptical-cables.com



OUTDOOR FIBER OPTIC CABLE OVERHEAD ARMORED GYXTW 2 4 6 8 12 24 CORE SINGLE MODE

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW-4B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Model: GYXTW-4B1.3
- Use: Aerial & Duct
- Loose Tube Material: PBT Or Jelly
- Cable Diameter: 7mm/8mm
- Samples: Free
- Fiber Grade: G652D/ G657A1
- Waterblocking Material: Water Blocking Tape Or Filling Compound
- Steel Wire: 1.0*2
- Highlight: g652d duct fiber optic cable,
g652d outdoor fiber optic cable



More Images



Product Description

**OUTDOOR FIBER OPTIC CABLE OVERHEAD
ARMORED GYXTW 2 4 6 8 12 24 CORE SINGLE MODE**

Our Product Introduction



GYXTW cable, single-mode 9/125 /multimode 50/125 OM3 OM4 fibers are positioned in the loose tube, which is made of high modulus plastic materials and filled with filling compound.

Two parallel steel wires are placed at both sides of the cable core while PE sheath is extruded over it. and water-blocking materials are distributed into interstices between them to guarantee the compactness and longitudinal water-blocking performance.

Feature:


- 1) Corrugated Steel Armor ensure the good mechanical performance.
- 2) Excellent protection from enviromental hazards.
- 3) High steady quality.
- 4) OEM is available.



APPLICATION



GYXTW Cable Place Order Information

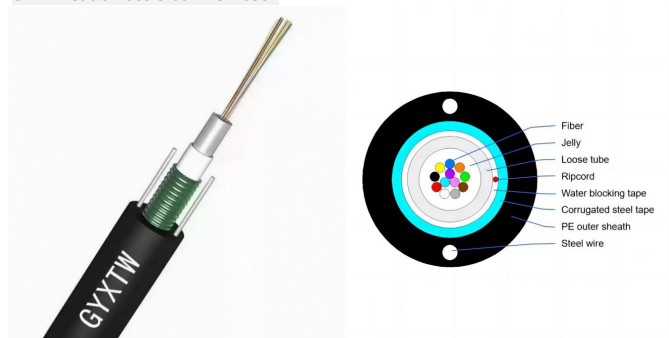

APPLICATION

Smart City Safe City Surveillance CCTV Camera System

Telephone. CATV, Fibre Broadband

Aerial / duct installation light anti rodent Rural networking telecommunication system

8Core Multi mode OM3 Fibre Local area networks (LAN) 1 & 10 & 40 & 100 & 400 Gb/s Ethernet

Cable data

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Fiber Parameters

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	1310nm 1550nm	μm 9.2±0.4 10.4±0.8
2	Cladding Diameter		μm 125.0±1.0
3	Cladding Non-Circularity		% ≤1.0
4	Core-Cladding Concentricity Error		μm ≤0.5
5	Coating Diameter		μm 245±5
6	Coating Non-Circularity		% ≤6.0
7	Cladding-Coating Concentricity Error		μm ≤12.0
8	Cable Cutoff Wavelength		nm λ _{cc} ≤1260
9	Attenuation(max.)	1310nm 1550nm 1380nm 1625nm	dB/km ≤0.35 ≤0.21 dB/km ≤0.35 dB/km ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm 1550nm 1525-1575nm 1550nm 1480-1580nm	dB/km ≤0.04 dB/km ≤0.03 dB/km ≤0.05
11	Dispersion	1288-1339nm 1271-1360nm 1480-1580nm 1550nm	ps/(nm.km) ≥-3.5, ≤3.5 ps/(nm.km) ≥-5.3, ≤5.3 ps/(nm.km) ≤20 ps/(nm.km) ≤18
12	Zero dispersion wavelength		Nm 1300-1324
13	Zero dispersion slope		ps/(nm ² ·km) ≤0.092
14	Typical value		ps/(nm ² ·km) 0.04
15	Largest individual fiber		Ps/√ km 0.2
16	Link design values		Ps/√ km 0.1
17	Two way average	1310nm-1550	≤0.01dB

Steel wire 0.7x2

Loose tube :2.2mm

Diameter :7.1



Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm

*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.



Production Supplier Profile



COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



+8613687956390

cotton@fibercabl

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China