GYFXTY Outdoor Fiber Optic Cable G652D FRP Strength 2-24 Cores

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: Model Number: **GYFXTY** • Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

. Transport Package: Wooden Drum • Fiber Counts: 2-24 Cores . Sheath Material: PE/LZSH FRP • Strength Member: • Outer Sheath Color: **BLACK**

• Laying Method: Overhead, Pipeline

• Highlight: g652d duct fiber optic cable,

g652d outdoor fiber optic cable, frp duct fiber optic cable



More Images



GYFXTY Outdoor Fiber Optic Cable G652D Non-Metallic FRP Strength Member

Product Attributes

Attribute	Value
Transport Package	Wooden Drum
Fiber Counts	2-24 cores
Sheath Material	PE/LZSH
Strength Member	FRP
Outer Sheath Color	BLACK
Laying Method	Overhead, Pipeline

Product Description

GYFXTY Fiber Cable is designed for outdoor applications, featuring FRP rods for strength and available in fiber counts from 2 to 12. These cables strictly follow the ITU-T G.652D standard and are fully compliant with IEC specifications.

Applications

Equipped with special low-bend-sensitivity fiber for enhanced bandwidth and transmission capabilities


Features two parallel steel wire or FRP strength members for robust crush resistance to protect the fiber


Simple structure with minimal weight and high practicability

Novel flute design allows for easy stripping and splicing, simplifying installation and maintenance

Low smoke emission, halogen-free, and flame retardant sheath



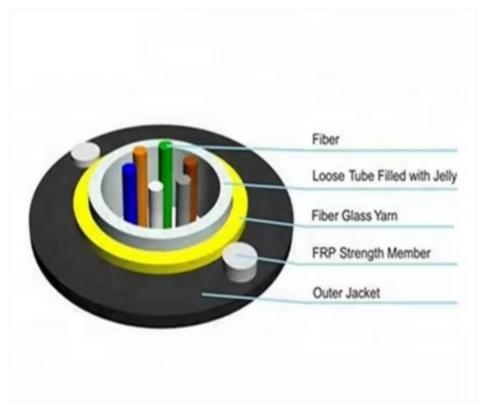

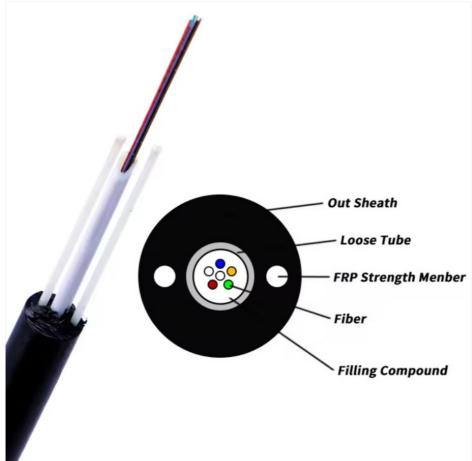

Key Features

Special low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission properties

Two parallel steel wire/FRP strength members ensure superior crush resistance to protect fiber

Simple structure, light weight and high practicability

Innovative flute design for easy stripping and splicing, simplifying installation and maintenance


Low smoke, zero halogen and flame retardant sheath

Product Parameters

Fiber Count	Nominal Diameter (mm)	Nominal Weight (kg/km)	Allowable Tensile Load (kg/mm)		Allowable Crush Resistance (N/100mm)		Aerial Install Span with 1% Sag		
			Short Term	Long Term	Short Term	Long Term	NESC Light	NESC Medium	NESC Heavy
2~12	6.5	35	1000	400	1000	300	80 meters	50 meters	30 meters
14-24	7.0	40	1200	500	1000	300	70 meters	40 meters	20 meters

Our Manufacturing Facility



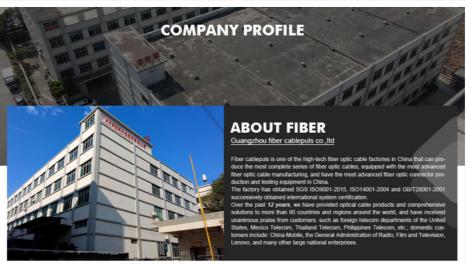



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY









Frequently Asked Questions

Why choose us?

We are the manufacturer located in Guangzhou, China, operating since 2011, serving the domestic market. Our factory employs 11-50

skilled professionals.

How can we guarantee quality?

We always provide pre-production samples before mass production and conduct final inspections before shipment.

Can you send products to my country?

Yes, we can. If you don't have your own shipping forwarder, we can assist with logistics.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China