GYFTY Outdoor Fiber Optic Duct Cable Single Mode 24-144 Core

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSHModel Number: GYFTY

Minimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



Product Specification

Item Mode: GYFTY
Jacket Color: Black
Fiber Type: G.652D
Outer Jacket Material: HDPE
Cable Diameter: 12.5 Mm
Armored Type: NONE

Application: Outdoor Duct Installation

• Fiber Count: 24/48/96/144/288

• Highlight: Duct Cable 144 Core, Frp Duct Cable,

GYFTY Fiber Optic Cable



More Images



Outdoor Fiber Optic Duct Cable Single Mode GYFTY Frp 24 36 48 96 144 Core

Product Specifications

Attribute	Value
Item mode	GYFTY
Jacket Color	Black
Fiber Type	G.652D
Outer Jacket Material	HDPE
Cable Diameter	12.5 mm
Armored Type	NONE
Application	Outdoor duct installation
Fiber Count	24/48/96/144/288


Product Description

GYFTY fiber optic cable is a non-metallic cable designed for power transmission systems, areas with excessive thunder activity, and high electromagnetic interference environments. Primarily used for aerial or duct applications, this cable is available in both single mode and multimode configurations.

The GYFTY FRP cable features a fiberglass reinforced plastic (FRP) central strength member with cable tubes filled with waterproof compound stranded around it. Aramid yarn reinforcement and a PE sheath complete the durable construction. Available in fiber counts from 2 to 144 cores, this cable is ideal for long-distance communications in high-voltage areas.





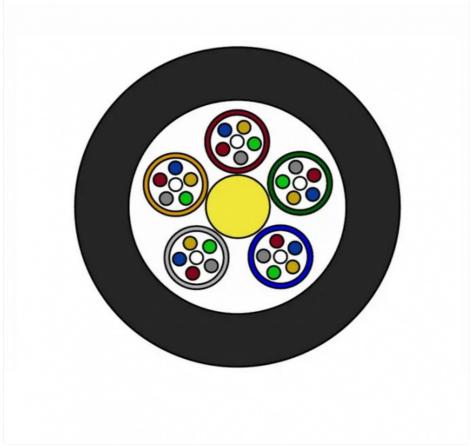





Technical Data Sheet

Part code	GYFTY XXXF					
Number of Fibers	8/12/24/36/48	72	96	144		
Number of fiber in tube	8/6/6/12/12	12	12	12		
Number of loose tube	1/2/4/3/4	6	8	12		
Number of dummy filler	4/3/1/2/1	0	0	0		
Central strength member	FRP	FRP	FRP	FRP+ PE Coated		
Loose tube material	PBT					
Additional strength	Fiberglass yarn					
Outer sheath	PE					
Cable nominal diameter (mm ±0.2)	9.5	10.0	11	12.4		
Cable nominal weight (Kg/Km ±5)	80	89	95	108		
Max. working tension (N)	2100	2400	2600	3000		
Max. crush resistance (N)	2000 (Short term) / 1000 (Long term)					
Min. bending radius	At full load 20 x Cable OD (including poles) At no load 15 x Cable OD					



Production Supplier Profile





How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

Two weeks before production completion, we will notify you to arrange shipping





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com