

GYTS fiber optical cable outdoor duct and aerial cable G652D

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:

Our Product Introduction

- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:

GUANGZHOU/CHINA PUNAISGD/CABLEPULS

- ISO/CE/ROSH GYTS 2km negotiate Wooden Spool /drum 5-25 days 30% TT as deposit, 70% Balance before shipping 100km



Product Specification

- Item:
- Strength Member:
- Sheath Material:
- Armoured:
- Fiber Mode:
- Fiber:
- Highlight:

GYTS Steel ΡE Steel Tape Multi Mode

- G652D, G657A1
- g652d duct fiber optic cable, g652d outdoor fiber optic cable



More Images



GYTS Outdoor Fiber Optical Cable

Products Description



Equipped with an armored loose tube and a unified jacket/armor system, GYTS fiber optic cables are capable of accommodating a significant number of fibers. Their design ensures they are both pliable and multifunctional, fitting for the stringent demands of modern installations, whether in ducts or buried conduits.

Product Details



Features:

- 1. These cables boast impressive mechanical characteristics and consistent performance across temperatures, maintaining functionality in diverse settings.
- 2. The material of the loose tube excels in hydrolysis resistance and offers greater strength.
- 3. The inclusion of a single steel wire as the core strengthens the cable against axial loads.
- 4. The protective PE sheath defends the cable against harmful UV rays.
- 5. The cable core is fully packed to eliminate any gaps.
- 6. The cable core is wrapped with corrugated steel tape, which provides robust protection against crushing.

Cable structure

-Metallic(non-metallic) strength member;

- -Loose tube stranded;-corrugated steel tape armored;
- -Gel filling;


-Polyethylene sheath outdoor cable for communication purpose;

Product Paramenters

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm	Nominal Thickness of outer jacket (mm	Cable diameter/ Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

Company Profile



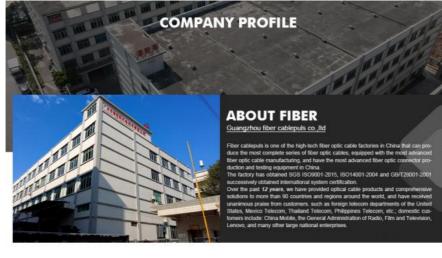



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Color Fiber Testing

A Stranded Loose Tube

Finished Cable Testing



HOT-SALE PRODUCT





FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow; Language Spoken:English,Chinese

