# **GYFTY Outdoor Fiber Optic Cable 12-144 Cores G652D FRP** Strength

### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

**GYFTY** Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



# **Product Specification**

**GYFTY** • Item: Jacket Material: PΕ **FPR** • Strength Member: Multi Mode • Type:

. Laying Method: Duct • Fiber: G652D

1km duct fiber optic cable, • Highlight:

1km outdoor fiber optic cable, frp duct fiber optic cable



# More Images




## GYFTY Fiber Optical Cable Outdoor 1km 12/24/48 Cores FRP Strength Member G652D

## **Product Attributes**

Attribute	Value
Item	GYFTY
Jacket Material	PE
Strength Member	FRP
Туре	Multi Mode
Laying Method	Duct
Fiber	G652D

# **Product Description**




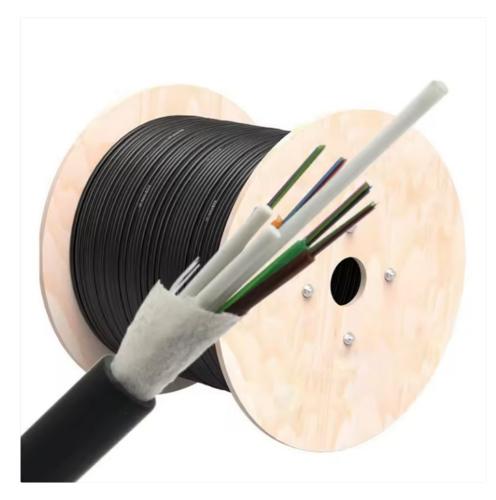


Specially crafted for outdoor telecommunication and data transfer needs, GYFTY cables utilize a non-metallic central strength member and loose tubes packed with water-resistant gel to safeguard the fiber optics from moisture and external elements. Fortified with aramid yarn for additional durability and pliability, an HDPE jacket encases the cable, offering superior protection against UV, chemical exposure, and mechanical damage.

Ideal for aerial, duct, and direct burial setups, these cables are built to withstand severe outdoor settings and are offered in multiple fiber counts to suit varying capacity demands, aligning with a spectrum of splicing and termination techniques. GYFTY cables stand out for their performance, robustness, and dependability, proving ideal for long-haul and high-speed communication infrastructures.

### **Cable Structure**

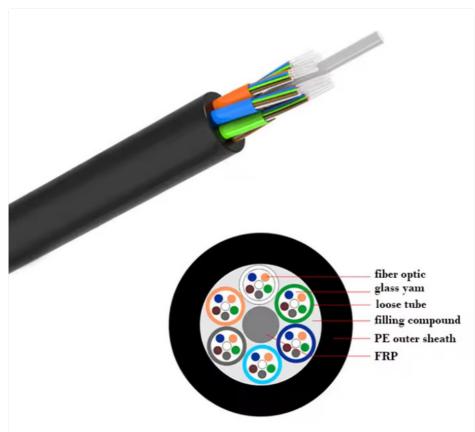

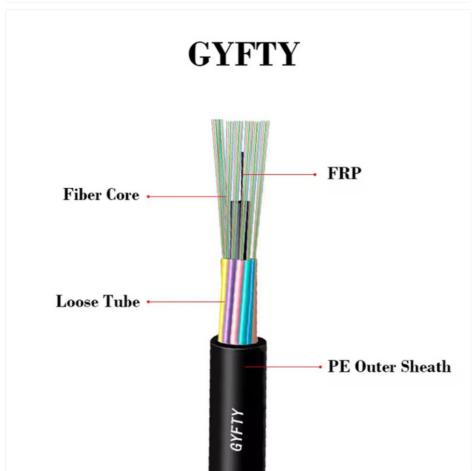

Fiber

Filling Compound

Non-metal member

Loose Tube

Water blocking system


Outer sheath

### **Product Parameters**

Fiber count	Structur e	Fibers per tube	Loose tube diameter	CSM diameter	Nominal thickness of outer jacket	Cable diameter	Cable weight
4	1+5	4	1.8±0.1	1.4/1.4	1.6	8.8±0.2	62
6	1+5	6	1.9±0.1	1.4/1.4	1.6	8.8±0.2	62
8	1+5	8	1.9±0.1	1.4/1.4	1.6	8.8±0.2	62
12	1+5	6	1.9±0.1	1.4/1.4	1.6	8.8±0.2	65
24	1+5	6	1.9±0.1	1.4/1.4	1.6	9.2±0.2	68
36	1+6	12	1.9±0.1	1.6/1.6	1.6	9.2±0.2	68
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.2±0.2	68
72	1+6	12	2.2±0.1	1.6/1.6	1.6	10.6	80
96	1+6	12	2.2±0.1	2.0/2.0	1.6	12.0	103
144	1+12	12	2.2±0.1	2.0/2.0	1.8	15.0	180

### **Our Factory**



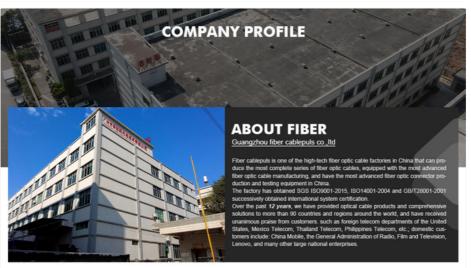



# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





# **HOT-SALE PRODUCT**





### TRANSPORT&PAY

































SHIPMENT - PAC

PACKAGING =

→ TRUCK LOADING →

**GOODS RECEIPT** 

## FAQ

### Why choose us?

people in our factory.

#### How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment.

### Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

### Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

### What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW; Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow; Language Spoken: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China