# FTTH Fiber Faceplate SC LC Optical Socket Panel 86x86x25mm

# **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

FTTH FIBER PANEL BOX Model Number:

• Minimum Order Quantity: 100pcs • Price: negotiate Packaging Details: plastic • Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 10000pcs



# **Product Specification**

• Item No: FTTH FIBER PANEL BOX

. Connector Types: SC / UPC • Factory: Yes • Stripper Material: Pc+ABS

SC/LC/ST/FC-based Connector · Connector:

Medidas: 85x85x22mm (LxAxH)

Blanco · Color:

. Highlight: Ftth Products Fiber Rosette Box,

SC/APC Fiber Rosette Box, SC/APC Ftth Fiber Panel Box



Our Product Introduction

#### FTTH Products Fiber Rosette Box FO With 01 SC/APC Standoff

#### **Product Attributes**

Attribute	Value
Item no	FTTH FIBER PANEL BOX
Connector Types	SC / UPC
Factory	Yes
Stripper Material	PC+ABS
Connector	SC/LC/ST/FC-based connector
Medidas	85x85x22mm (LxAxH)
Color	Blanco

### **Product Description**

This FTTH Fiber Faceplate SC LC Optical Socket Panel is designed for splicing and termination between indoor SC LC fiber optic cable and pigtails. Mainly used for wall mounted applications.

Color: Blanco


Dimensions: 85x85x22mm (LxWxH)

Number of inputs: 2 ports Supports 2 SC Simplex adapters

Wall mountable Indoor use

Protection level: IP54

Compliance with ITU G652D, IEC 61300, ASTM G21, UL 94 V1

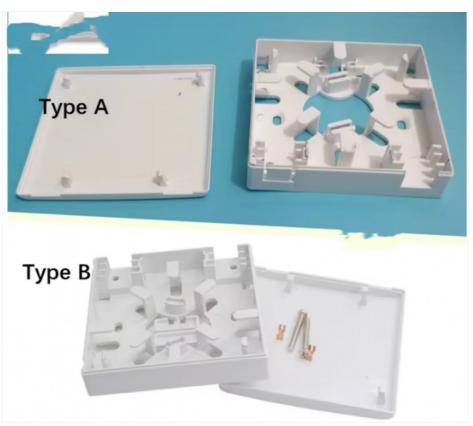

Note: Not Included any Fiber Optic connector

**Product Specifications** 

Product name	86 Faceplate termination box		
Material	PC+ABS		
Color	White		
Dimension	86*86*25mm		
Suitable Adapter	SC, LC		
Fiber type	SM&MM		
Scope of application	3.0x2.0mm drop cable or indoor cable		
Tensile strength	> 50 N		
Operating temperature	-40 ~ +85 °C		
Mounting	Wall mount		

### **Key Features**

Dust-proof design with IP-45 Protection level

Integrated with splice cassette and cable management rods

Manages fibers in a reasonable fiber radius condition

Easy to maintain and extend the capacity

Suitable for fusion splice or mechanical splice

Embedded type surface, easy for installation and removal

1 port cable entrance for patch cable


### Configuration

Material	Size	Max Capacity	Mounting Way	Weight	Color
PC+ABS	86*86*24mm	SC 2 Port / LC 4 Port	Wall Mounting	0.2kg	White

## **Product Keywords**

#### **FTTH Outlet Box**

### **Production Supplier Profile**

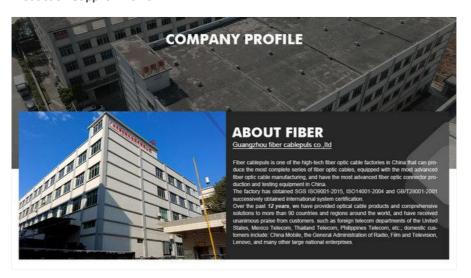







+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com