GYTA33 Steel Wire Armoured Fiber Optic Cable 24 Core Single Mode

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYTA33
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Structure: Stranded Loose Tube

Loose Tube Material: PBTOuter Sheath Color: Black

Armour: Steel Wire TapeArmor Layer: Aluminum Tape

• Temperature Range: -20~+60

 Highlight: 24 cores single mode cable, fiber optic cable 24 cores,

armoured fiber optic cable



More Images



GYTA33 Fiber Optic Cable - 24 Cores Single Mode Steel Wire Armoured Cable

Product Attributes

Attribute	Value
Structure	Stranded loose tube
Loose tube material	PBT
Outer Sheath Color	Black
Armour	Steel wire tape
Armor Layer	Aluminum Tape
Temperature range	-20°C to +60°C

Product Description

The GYTA33 submarine fiber optic cable, designed for a fiber count of 2 to 72, incorporates a steel central member for strength and is packed with a jelly substance. The fiber is encased in a tube that can be filled with polypropylene if necessary, and is woven around a water-resistant gel. The cable is protected by an aluminum tape with a copolymer coating, wrapped in a polyethylene inner sheath, armored with a layer of steel wires, and sheathed in a polyethylene outer layer. It is specified for G652D single-mode fiber, with the option to adjust the details according to your needs.



Key Features


The top-tier optical fiber delivers high-quality transmission characteristics.


The accurate regulation of the fiber's surplus length ensures superior mechanical and thermal performance.

The loose tubes, packed with a unique gel, provide flawless protection for the optical fibers.


The full-section water-blocking system ensures the cable's core is steadfast in its resistance to moisture and water.

The central strength member, a corrosion-resistant steel wire with an elevated Young's modulus, provides the necessary tensile strength.

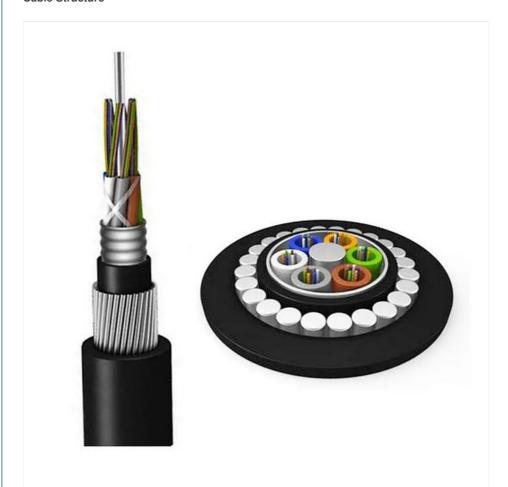

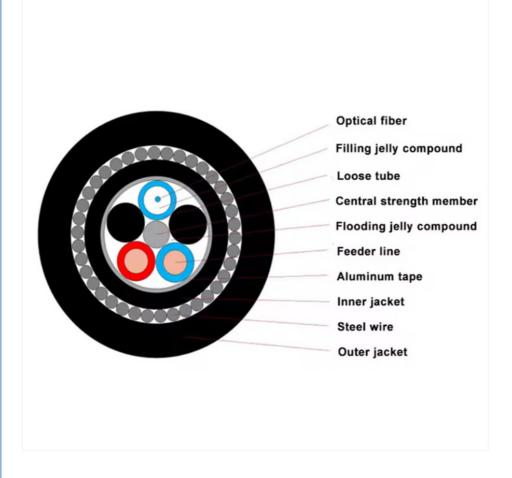



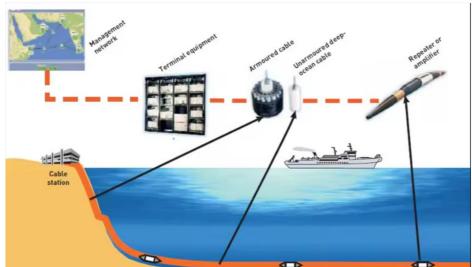

Product Parameters

Cable Type	Fiber Count	Structure	Cable Diameter (mm)	Cable Weight (kg/km)
GYTA33	2-30	1+5	12.8	268
	32-36	1+6	13.2	287
	38-60	1+5	13.9	318
	62-72	1+6	14.2	334
	72-84	1+7	15.1	363
	86-96	1+8	15.1	387
	98-108	1+9	16.6	437
	110-120	1+10	17.2	465
	122-132	1+11	18.3	558
	134-144	1+12	18.9	583
	146-216	1+6+12	18.4	503
	218-288	1+9+15	20.5	600

Our Factory

NEWS AND FIBER OPTICAL CABLE SOLUTION

📜 | PROFESSIONAL PERSISTENCE


















12

90+

120+

≤ 2h

99%

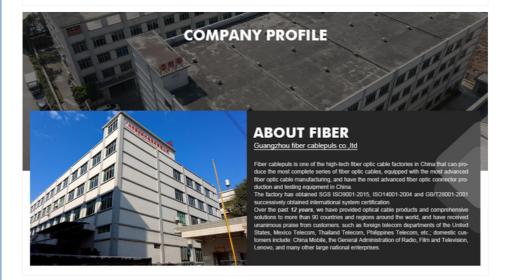














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM















▲ Stranded Loose Tube

▲ Finished Cable Testing







Frequently Asked Questions

Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment.

Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW; Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow; Language Spoken: English, Chinese







cotton@fibercablepuls.com



fiberoptical-cables.com