# **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: Model Number: gyxtc8y-6B1.3

• Minimum Order Quantity: 2km

• Price: negotiable


Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

100km • Supply Ability:



# **Product Specification**

• Item NO.: Gyxtc8y-6b1.3 • TYPE: Mini Fig.8 Shape • Strength Member: Aramid Yarn **OVERHEAD** · Application: G652D • Fiber: 4.0MM • Od:

• Highlight: Aerial Figure 8 Fiber Optic Cable GYXTC8Y,

Yarn Aerial Figure 8 Fiber Optic Cable, Aerial Fiber Optic Cable 6 Core



Our Product Introduction

## Mini Aerial Figure 8 Fiber Optic Cable GYXTC8Y With Yarn 6 Core 12 Core

## **Product Specifications**

Attribute	Value
Item NO.	gyxtc8y-6b1.3
TYPE	mini Fig.8 shape
Strength member	aramid yarn
Application	OVERHEAD
Fiber	G652D
OD	4.0MM

#### **Product Description**

The GYXTC8Y is a self-supported mini figure 8 optical cable with fibers placed in jelly-filled loose buffer tubes covering the aramid yarn. This  $250\mu m$  optical fiber is housed in high modulus loose tubes, providing a figure-8 self-supporting structure that delivers high tensile strength for easy and cost-effective aerial installations.

## **Key Features**


Excellent mechanical and temperature performance

High-strength, hydrolysis-resistant loose tube

Special tube filling compound for critical fiber protection

Superior crush resistance and flexibility



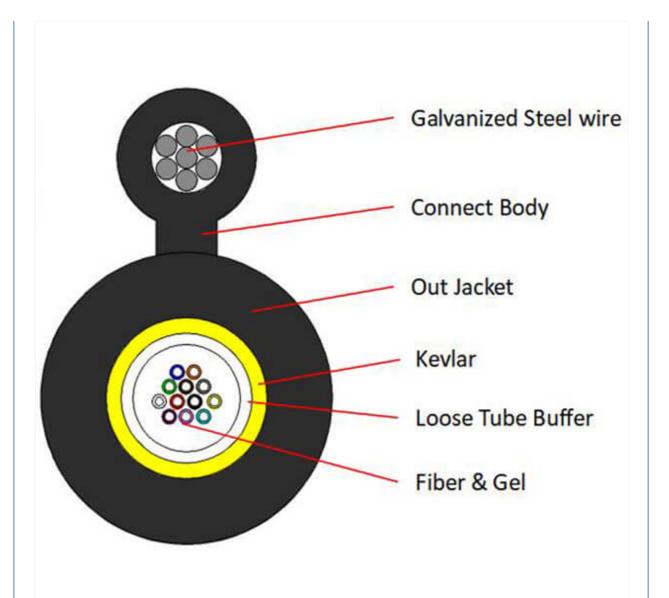





Model: GYXTC8Y

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath

Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1\*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)


1000(Long term)

Cable Diameter: 9.1\*16.9mm


Package: 4km/drum Weight: 142KG/KM




#### **Order Information**

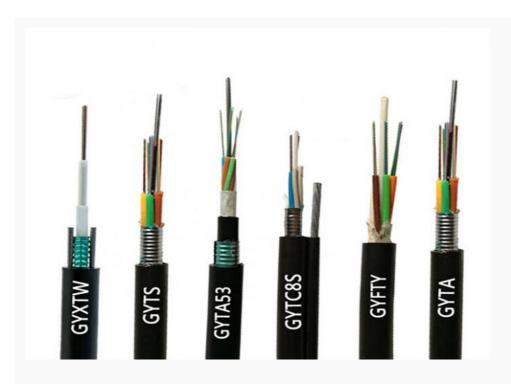

Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance (Long term)	300 (N/100MM)
Crush Resistance (Short term)	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

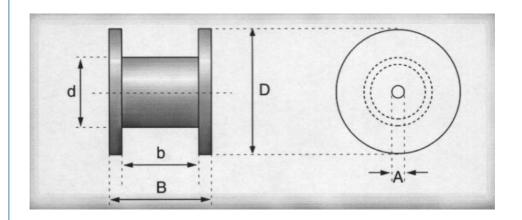


# **Supplier Information**

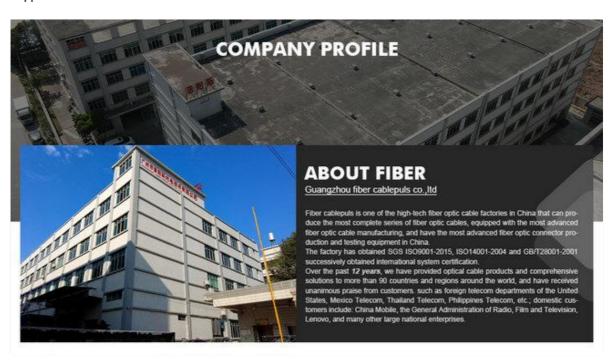











# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**











▲ Color Fiber Testing

▲ Stranded Loose Tube

▲ Finished Cable Testing



### **Custom Order Process**

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

Two weeks before production completion, we will notify you to arrange shipping



# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com