ġ.

more products please visit us on fiberoptical-cables.com

Mini Aerial Figure 8 Fiber Optic Cable GYXTC8Y With Yarn 6 Core 12 Core

Basic Information

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH Model Number: gyxtc8y-6B1.3


 Minimum Order Quantity: 2km • Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



Product Specification

Supply Ability:

Item NO.: Gyxtc8y-6b1.3 • TYPE: Mini Fig.8 Shape • Strength Member: Aramid Yarn • Application: OVERHEAD • Fiber: G652D • Od: 4.0MM

• Highlight: Aerial Figure 8 Fiber Optic Cable GYXTC8Y,

Yarn Aerial Figure 8 Fiber Optic Cable, Aerial Fiber Optic Cable 6 Core



Product Description

Aerial Mini Figure.8 Fiber Optic Cable Mini Figure 8 Optic Fiber Cable GYXTC8Y With Yarn 6 Core 12 Core


GYXTC8Y Self-supported mini figure 8 optical cable with fibers placed in jelly filled loose buffer tube,

the loose tube covering the aramid yarn.

TThe structure of GYXTC8Y cable is to put 250µm optical fiber into loose tube made of high modulus material. Figure-8 self-supporting structure provide high tensile strength and enables easy and cost saving aerial installations.

- 1. Good mechanical and temperature performance
- 2. High strength loose tube that is hydrolysis resistant
- 3. Special tube filling compound ensure a critical protection of fiber
- 4. Crush resistance and flexibility



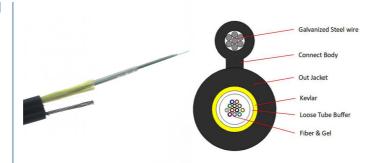





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath


Armor: Steel Tape

Tension Strength: 1000(Short term)

300(Long ten

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm


Package: 4km/drum Weight: 142KG/KM



GYTC8S Cable Place Order Information



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

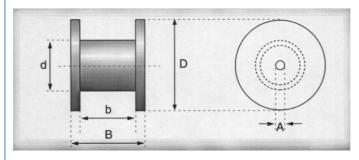

Production Supplier Profile









+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China