

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: Model Number: gyxtc8y-8B1.3

• Minimum Order Quantity: 2km • Price: negotiable

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

100km • Supply Ability:



Product Specification

• Item NO.: Gyxtc8y-8b1.3 • TYPE: Mini Fig.8 Shape

PBT • Loose Tube Material:

• Strength Member: Aramid Yarn **OVERHEAD** · Application: • Fiber: G652D

• Highlight: Outdoor Aerial Figure 8 Fiber Optic Cable,

12 Core Aerial Fiber Optic Cable, Steel Messenger Aerial Fiber Cable



More Images



Our Product Introduction

Mini Aerial Figure 8 Fiber Optic Cable Outdoor 2 4 6 8 12 Core With Steel Messenger

Product Specifications

Item NO.	gyxtc8y-8b1.3
TYPE	mini Fig.8 shape
Loose Tube Material	PBT
Strength member	aramid yarn
Application	OVERHEAD
Fiber	G652D

Product Description

GYXTC8Y Self-supported mini figure 8 optical cable with fibers placed in jelly filled loose buffer tube, the loose tube covering the aramid yarn. The structure of GYXTC8Y cable is to put 250µm optical fiber into loose tube made of high modulus material. Figure-8 self-supporting structure provides high tensile strength and enables easy and cost-saving aerial installations.

Key Features


- · Excellent mechanical and temperature performance
- · High strength loose tube that is hydrolysis resistant
- Special tube filling compound ensures critical protection of fiber, crush resistance and flexibility
- Special Low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission properties
- Simple structure, light weight and high practicability

Applications

- · Long-distance telecom, LAN in high-voltage area or access to telecom network
- Especially suitable for power transmission systems in areas with frequent thunderstorms and high electromagnetic interference

Product Images



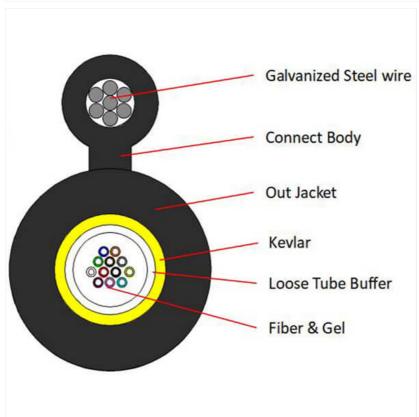





Model: GYXTC8Y

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath

Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)


300(Long term)

Cable Diameter: 7.6*14.5mm


Package: 4km/drum Weight: 117KG/KM



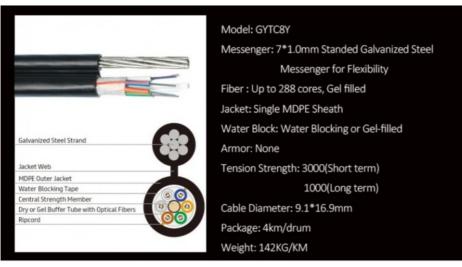

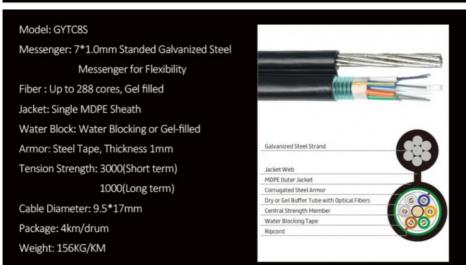


Ordering Information

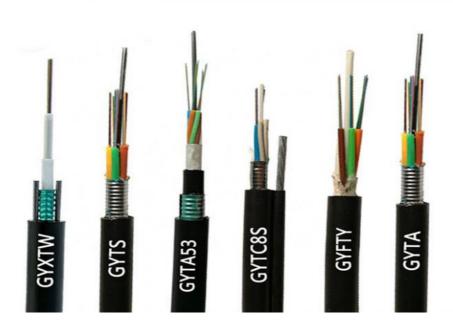

Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance (Long term)	300 (N/100MM)
Crush Resistance (Short term)	1000(N/100MM)

Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

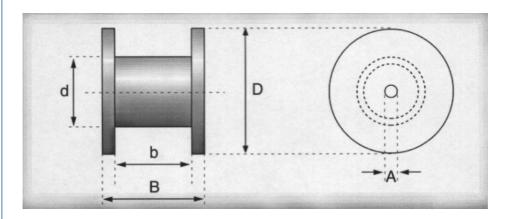

Supplier Information





Custom Order Process

- 1. Send your purchase intention to our email:cotton@fibercablepuls.com
- 2. Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements
- 3. Sign the contract or Proforma Invoice
- 4. After receiving your deposit, we will begin production
- 5. Two weeks before production completion, we will notify you to arrange shipping





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com