

Mini Aerial Figure 8 Fiber Optic Cable Outdoor 2 4 6 8 12 Core With Steel Messenger

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Place of Origin:	GUANGZHOU/CHINA
 Brand Name: 	PUNAISGD/CABLEPULS
 Certification: 	ISO/CE/ROSH
 Model Number: 	gyxtc8y-8B1.3
Minimum Order Quantity:	2km
• Price:	negotiable
 Packaging Details: 	Wooden Spool /drum
 Delivery Time: 	5-25days
• Payment Terms:	30%TT as deposit,70%Balance before shipping.
 Supply Ability: 	100km

Product Specification

Basic Information

More Images



Product Description

Outdoor 2 4 6 8 12 Core Aerial Figure 8 Optical Fiber Cable With Steel Messenger Gyxtc8y


GYXTC8Y Self-supported mini figure 8 optical cable with fibers placed in jelly filled loose buffer tube, the loose tube covering the aramid yarn.

The structure of GYXTC8Y cable is to put 250µm optical fiber into loose tube made of high modulus material. Figure-8 self-supporting structure provide high tensile strength and enables easy and cost saving aerial installations.

Products Features


- * Good mechanical and temperature performance
- * High strength loose tube that is hydrolysis resistant,
- special tube filling compound en sure a critical protection of fiber, crush resistance and flexibility * Special Low-bend-sensitivity fiber provides high bandwidth and excellent communication
- transmission property
- * Simple structure, light weight and high practicability

Application * Long-distance telecom, LAN in high- voltage area or access to telecom network

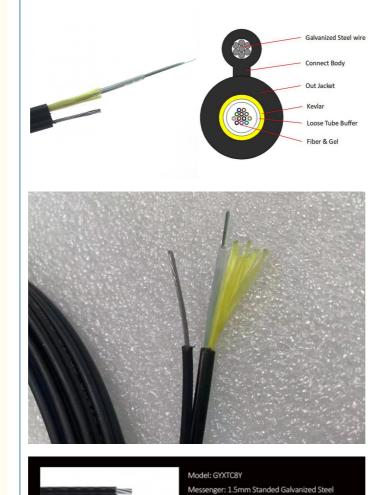

Fiber : Up to 24 cores, Gel filled Jacket: Single HDPE Sheath Armor: None ized Steel Messenge Tension Strength: 1000(Short term) 300(Long term) Loose tub Gel-filler Cable Diameter: 5.1*10.2mm Up to 24 cores Fibers Package: 4km/drum ket Single HDPE Sheath Weight: 47KG/KM Model: GYXTC8S Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility


Fiber : Up to 24 cores, Gel filled Jacket: Single HDPE Sheath Armor: Steel Tape Tension Strength: 1000(Short term) 300(Long term) Cable Diameter: 7.6*14.5mm Package: 4km/drum Weight: 117KG/KM



Messenger for Flexibility



Model: GYTC8Y Messenger: 7*1.0mm Standed Galvanized Steel Messenger for Flexibility Fiber : Up to 288 cores, Gel filled Jacket: Single MDPE Sheath Water Block: Water Blocking or Gel-filled Armor: None Tension Strength: 3000(Short term) 1000(Long term) Cable Diameter: 9.1*16.9mm Package: 4km/drum Weight: 142KG/KM

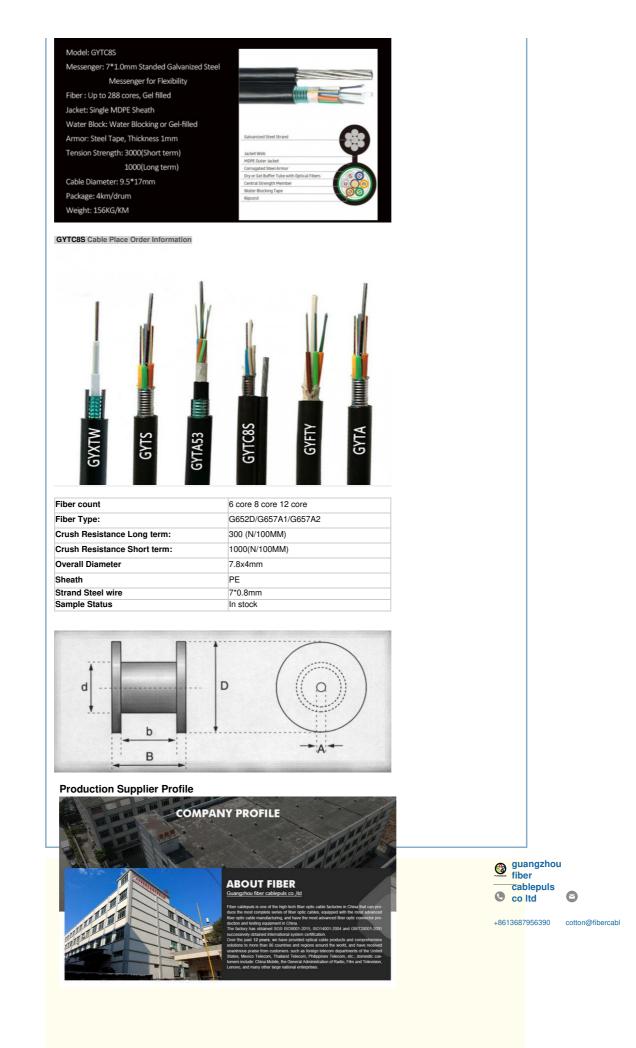



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?
 1) Send your purchase intention to our email: cotton@fibercablepuls.com
 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
 3) Sign the contract or Proforma Invoice.
 4) After receiving your deposit, we will start to arrange the production.
 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China