GYXTW Outdoor Fiber Optic Cable Steel Tape Armoured 2-24 Core

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTW** Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

Armour Material: Corrugated Steel Tape Armoured

· Core: 2~24 Core Single Mode • Fiber Mode: • Strength Member Material: Steel Wire

• Single Armour Material: Corrugated Aluminium Tape

• Outer Jacket Materail:

. Highlight: armoured duct fiber optic cable,

armoured outdoor fiber optic cable



More Images



GYXTW Outdoor Fiber Optic Cable - Fibra Cables Overhead Central Bundle Tube Armored

Product Specifications

Attribute	Value
Armour Material	Corrugated Steel Tape Armoured
Core	2~24 core
Fiber Mode	Single Mode
Strength Member Material	Steel Wire
Single Armour Material	Corrugated aluminium tape
Outer Jacket Material	PE

Product Description

Uni-Tube Fiber Optic Cable with Armor: Designed with a single uni-tube containing fibers in a loose buffer tube for easy installation and flexibility.


Corrugated Steel Tape: Core is protected by steel tape armor with corrugated pattern for increased strength, sheathed in black polyethylene jacket.

Embedded Steel Wires: Two steel wires maintain desired tension and provide stability.



Product Construction



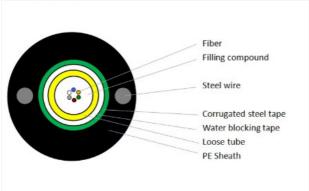

• Fiber: 2-24 fibers in uni-loose tube gel-filled

• Armor: Corrugated steel tape

• Strength Member: Embedded steel wire

• Outer Jacket: Black UV-and moisture-resistant polyethylene (PE)

Key Features

- Gel-Filled Uni-Tube for optimal fiber protection against environmental hazards
- Steel Tape Armored for defense against rodent attacks and mechanical damage
- Enhanced tensile strength and crush resistance from embedded steel wires
- Compact profile for easy installation in various deployment scenarios
- UV and moisture resistant for reliable performance in harsh weather conditions


Technical Parameters

Fiber count	Struc ture	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mnm)	Cable diameter/ Height (m)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57

4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Company Profile



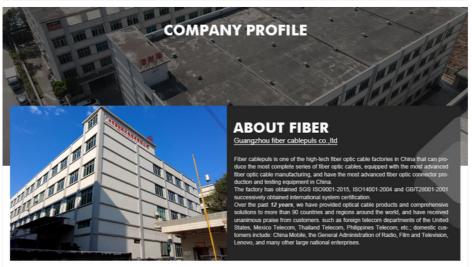



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY































SHIPMENT

PACKAGING

TRUCK LOADING →

GOODS RECEIPT

Frequently Asked Questions

We are the manufacturer located in Guangzhou, China, operating since 2011. Our factory employs 11-50 professionals and serves domestic markets.

How can we guarantee quality?

We provide pre-production samples before mass production and conduct final inspections before shipment.

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own forwarder, we can assist with logistics.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements for a competitive quote and sample production.

What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese





+8613687956390

cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China