



# **Steel Armored Single Mode Fiber Optic Cable 2-24** Core

## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTW** Model Number: • Minimum Order Quantity: 2km • Price:

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

negotiate

shipping

100km • Supply Ability:



## **Product Specification**

Armour Material: Corrugated Steel Tape Armoured

· Core: 2~24 Core Single Mode • Fiber Mode: • Strength Member Material: Steel Wire

• Single Armour Material: Corrugated Aluminium Tape

• Outer Jacket Materail:

. Highlight: armoured gyxtw fiber optic cable, armoured outdoor fiber optic cable



# More Images



## **GYXTW Steel Armoured Fiber Optic Cable with Double Strength Member**

## **Product Attributes**

Attribute	Value
Armour Material	Corrugated Steel Tape Armoured
Core	2~24 core
Fiber Mode	Single Mode
Strength Member Material	Steel Wire
Single Armour Material	Corrugated aluminium tape
Outer Jacket Material	PE

## **Product Description**

Single Armor Fiber Optic Cable: This fiber optic cable utilizes a single uni-tube with a loose buffer tube for the fibers, offering a balance between protection and flexibility.


Armor and Jacket: The cable's core is protected by a steel tape armor that is corrugated for strength, followed by a black polyethylene outjacket for external protection.

**Tension Provision:** Two embedded steel wires are integrated into the cable to provide the necessary tension, aiding in secure and reliable deployment.



## **Product Construction**



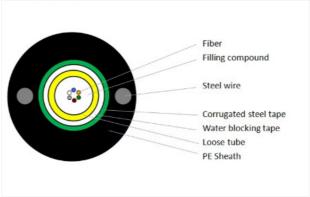

• Fiber: 2-24 fibers, Uni-loose tube gel-filled

• Armor: Corrugated steel tape

• Strength Member: Embedded steel wire

• Outer Jacket: Black UV-and moisture-resistant polyethylene (PE)

## **Key Features**

Gel-Enhanced Uni-Tube for superior fiber protection

• Steel Tape Armored for protection against rodents and mechanical impacts

Steel Wires for optimal tensile and crush resistance

• Compact design for effortless installation

• UV and moisture-resistant for diverse environmental conditions


## **Product Parameters**

Fiber count	Struc ture	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/ Height (m)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58

8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

## **Company Profile**



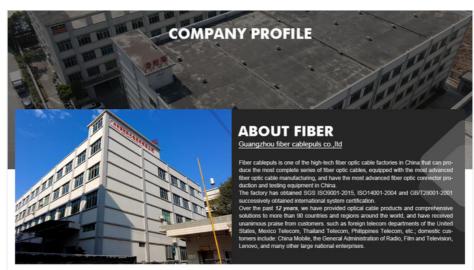

















SHIPMENT

**PACKAGING** 

TRUCK LOADING

**GOODS RECEIPT** 

## **Frequently Asked Questions**

#### Why choose us?

professionals dedicated to quality production.

## How do we guarantee quality?

We conduct pre-production samples before mass production and perform final inspections before shipment to ensure product excellence.

## Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own forwarder, we can arrange shipping for you.

## Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

## What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Types: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese

# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China