



Single Mode Armored Fiber Optic Cable 2-24 Core Steel Tape PE Jacket


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km



Product Specification

- Armour Material: Corrugated Steel Tape Armoured
- Core: 2~24 Core
- Fiber Mode: Single Mode
- Strength Member Material: Steel Wire
- Single Armour Material: Corrugated Aluminium Tape
- Outer Jacket Material: PE
- Highlight: **armoured gyxtw fiber optic cable, armoured outdoor fiber optic cable**

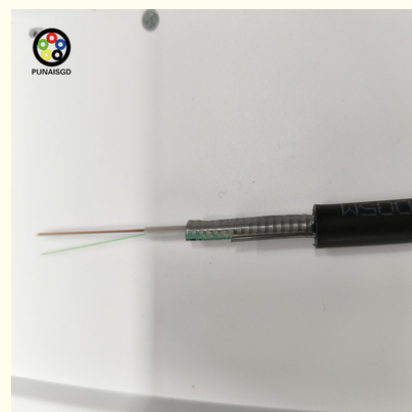

Product Description

GYXTW Fiber Optic Cable - Single Mode Aerial Cable for Telecommunication

Product Attributes


Attribute	Value
Armour Material	Corrugated Steel Tape Armoured
Core	2~24 core
Fiber Mode	Single Mode
Strength Member Material	Steel Wire
Single Armour Material	Corrugated aluminium tape
Outer Jacket Material	PE

Product Description

- Uni-Tube Armored Fiber Optic Cable with a Single Jacket:** Features a single uni-tube with internal loose buffer tube to house fibers, protected by armor and jacket for extensive defense.
- Corrugated Steel Tape and Protective Polyethylene Layer:** Shielded by steel tape armor for durability, clad in black polyethylene jacket for environmental protection.
- Stability Through Tension Regulation:** Two embedded steel wires maintain tension levels for consistent performance and structural stability.



Product Construction

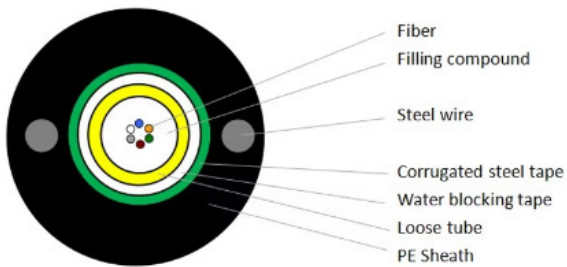

- **Fiber:** 2-24 fibers, Uni-loose tube gel-filled
- **Armor:** Corrugated steel tape
- **Strength Member:** Embedded steel wire
- **Outer Jacket:** Black UV-and moisture-resistant polyethylene (PE)

Key Features

- Gel-Infused Uni-Tube for superior fiber protection
- Steel tape armor for defense against rodents and abrasions
- Embedded steel wires for tensile strength and crush resistance
- Compact, user-friendly design for easy installation
- UV and moisture resistant for various climates

Product Parameters

Fiber count	Structure	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (m)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



HOT-SALE PRODUCT



CERTIFICATES




TRANSPORT&PAY



Air Freight



Land Transportation



Shipping



Delivery



And More.....



SHIPMENT



PACKAGING



TRUCK LOADING



GOODS RECEIPT

Frequently Asked Questions

Why choose us?

We are manufacturer located in Guangzhou, China, established in 2011, serving domestic markets with a team of 11-50 professionals.

How can we guarantee quality?

Pre-production samples before mass production; final inspection before shipment.

Can you send products to my country?

Yes, we can ship worldwide and assist with logistics if needed.

Can you do OEM for me?

We accept all OEM orders - contact us with your design for samples and pricing.

What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF

Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China