




Outdoor FTTH Drop Cable 1 Core 3 Steel Wire Sling G657A1 GJYXCH 1km 10km

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GJYXCH-1B6
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 1000km



Product Specification

- MODEL: GJYXCH-1B6
- Steel Wires: 3 Steel Wires
- Fiber Count: 1,2,4,6,8 Fibers Customized
- Cable Weight: 32KG±1KG
- Construction: LSZH + Fiber+steel Wires
- Out Sheath: LSZH/PVC
- Highlight: Outdoor FTTH Drop Cable,
G657A1 FTTH Drop Cable,
10km FTTH Drop Cable




Product Description

FTTH Drop Cable 1 Core 3 Steel Wire Sling G657A1 GJYXCH FTTH Fiber Optic Cable 1km 10km Outdoor Drop Wire Cable


The optical fiber unit is positioned in the center.
Two parallel Fiber Reinforced Plastics (FRP) are placed on the sides.
A steel wire as the additional strength member is also applied.
Then the cable is completed with a black or colored LSZH sheath.

Our Product Introduction

Indoor FTTH Cable (2 wires)



Outer FTTH Cable (3 wires)



cable structure

1. STEEL WIRE 2. FIBER 3. LSZH JACKAGE

diameter of cable: $(2.0 \pm 0.2) \times (5.0 \pm 0.2) \text{ mm}$

type fiber: Singlemode G.657A

2KM/PLYWOOD REEL

REEL SIZE: 40*40*37cm

G.W.: 42KG/REEL 2KM/REEL

20KG/KM

Phosphating steel wire : 1 * 1.0 mm

Phosphating steel wire: 2 * 0.45 mm

FTTH Optical Cable



PRINTING ON SHEATH: CABLEPULS 2024 FTTH DROP CABLE XXCORE(G.657A) XXXXm

*The marking is printed every 1 meter;

- The color of marking is white, but if the remarking is necessary, the yellow color marking shall be printed newly on a different position.
- An occasional unclear of length marking is permitted if both of the neighboring markings are clear;
- The both cable ends are sealed with heat shrinkable end caps to prevent water ingress.

Specification


Type	Diameter(mm)	Weight kg/km	Tensile strength Long/short term(N)		Crush Long/short term(N/100mm)	Bending Radius Static/Dynamic	
GJX FH-1	2.0*3.0	10.5	100/200		500/1000	15/30	
GJX FH-2	2.0*3.0	10.5	100/200		500/1000	15/30	
GJX FH-4	2.0*3.0	10.5	100/200		500/1000	15/30	
Fiber Model	Fiber count	Cable Weight kg/km	Bending Radius Static /Dynamic mm	Tensile resistance Long/short term N	Crush resistance Long/short term N/100mm	working temperature (c)	
1	(2.0±0.2)×(5.0±0.2)	20	20/40	300/600	1000/2200	-40°~+70°	
2	(2.0±0.2)×(5.0±0.2)	20	20/40	300/600	1000/2200	-40°~+70°	

4	(2.0±0.2)×(5.0±0.2)	20	20/40	300/600	1000/2200	-40°~+70°
6	(2.0±0.2)×(5.0±0.2)	24	20/40	300/600	1000/2200	-40°~+70°
8	(2.0±0.2)×(5.0±0.2)	24	20/40	300/600	1000/2200	-40°~+70°
12	(2.0±0.2)×(5.0±0.2)	20	20/40	300/600	1000/2200	-40°~


Item		Unit	Specification
Fier Tyoe		G652D	G652D
Mode filed Diameter	1310nm	μm	9.2±0.4
	1550nm	μm	10.4±0.8
Cladding diameter		μm	125.0±0.1
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245±7
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		μm	≤1260
Attenuation Coefficient	1310nm	db/km	≤0.36
	1550nm	db/km	≤0.22
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652

Production Supplier Profile

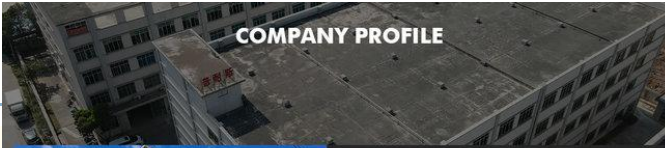

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China. The factory has obtained ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification. Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 10 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China