



12 Core GYXTC8Y Aerial Figure 8 Fiber Optic Cable

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSHModel Number: gyxtc8y-12B1.3

Minimum Order Quantity: 2kmPrice: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



Product Specification

• Item NO.: Gyxtc8y-12b1.3

TYPE: FIG.8Loose Tube Material: PBT

• Strength Member: Aramid Yarn & STEEL WIRES

Application: OVERHEADFiber: G652D

• Highlight: Self Supporting Aerial Optical Cable,

7 Wires Aerial Optical Cable, GYXTC8Y Aerial Optical Cable



Mini Figure 8 12 Fiber Self Supporting Aerial Optical Cable With 7 Wires GYXTC8Y

Product Specifications

Attribute	Value
Item NO.	gyxtc8y-12b1.3
TYPE	FIG.8
Loose Tube Material	PBT
Strength member	aramid yarn & STEEL WIRES
Application	OVERHEAD
Fiber	G652D

Product Description

Aerial Mini Figure.8 Fiber Optic Cable 12 Fiber Self-Supporting Aerial Optical Cable With 7 Wires GYXTC8Y


12 core optical cable is available in two structural types: outdoor and indoor configurations

Outdoor variants feature either central beam tube or laminate tube designs, with laminate tube being the preferred choice for its superior core capacity and enhanced protection

Central beam tube design utilizes a double steel wire reinforced structure without paste filling, positioned at the cable center

Laminate stranding configuration arranges optical fibers around a central stiffener for optimal performance



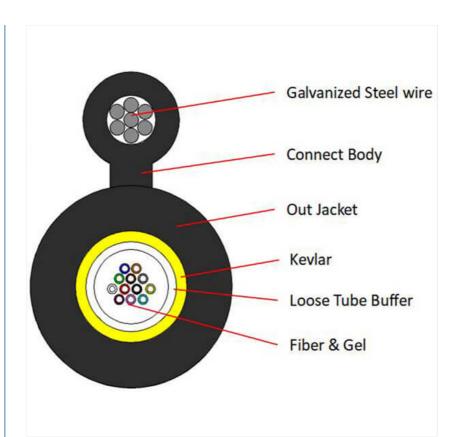





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled


Jacket: Single HDPE Sheath Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm Tension Strength: 3000(Short term)


1000(Long term)

Cable Diameter: 9.5*17mm


Package: 4km/drum Weight: 156KG/KM




GYTC8S Cable Ordering Information

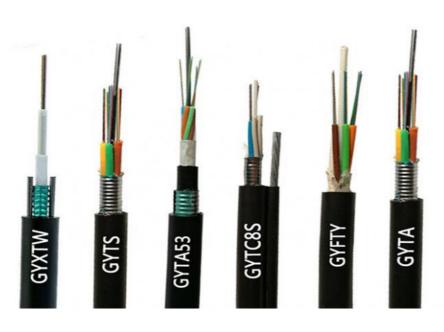

Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

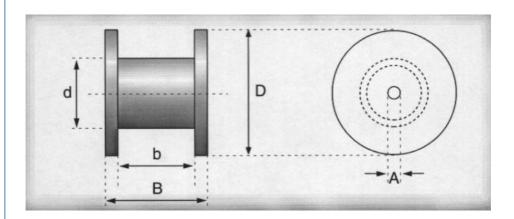

Manufacturer Information

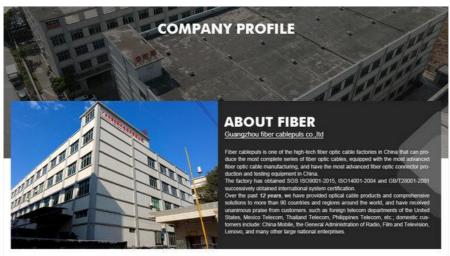



Custom Order Process

How to place an OEM or customized order:

Send your purchase requirements to: cotton@fibercablepuls.com

Our sales team will confirm product specifications, packaging, and quantity details

Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping coordination starts 2 weeks before production completion











925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China