



# **GYXTC8Y Aerial Figure 8 Fiber Optic Cable 4-12 Core Non-Armored**

### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

Model Number: gyxtc8y • Minimum Order Quantity: 2km

• Price: negotiable


 Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

100km . Supply Ability:



## **Product Specification**

• Item NO.: Gyxtc8y

• TYPE: FIG.8 Shape Mini

• Loose Tube Material:

• Strength Member: Aramid Yarn & STEEL WIRES

**OVERHEAD** · Application: • Fiber: G652D · Armored: Non-armored

. Highlight: Micro Aerial Figure 8 Fiber Optic Cable,

Fiber Optic Cable GYXTC8Y, Non Armored Fiber Optic Cable



## More Images



Our Product Introduction

#### Micro Aerial Figure 8 Fiber Optic Cable GYXTC8Y 4 6 8 12 FO Uni-Tube Non Armored

#### **Product Specifications**

Attribute	Value
Item NO.	gyxtc8y
TYPE	FIG.8 shape mini
Loose Tube Material	РВТ
Strength member	aramid yarn & STEEL WIRES
Application	OVERHEAD
Fiber	G652D
Armored	non-armored

#### **Product Description**

Aerial Mini Figure 8 Fiber Optic Cable GYXTC8Y 4 6 8 12 FO Fig 8 Uni-Tube Non-Armored Mini Figure 8 Cable Micro Cable

Excellent mechanical and temperature performance

Special tube filling compound ensures critical protection of fiber and water-resistance


Loose tube stranding cable core ensures stable cable structure

Loose tube completely filled with compound to ensure water-proofing

High tensile strength stranded wires meet self-supporting requirements and reduce installation complexity

Outer sheath protects cable from ultraviolet radiation



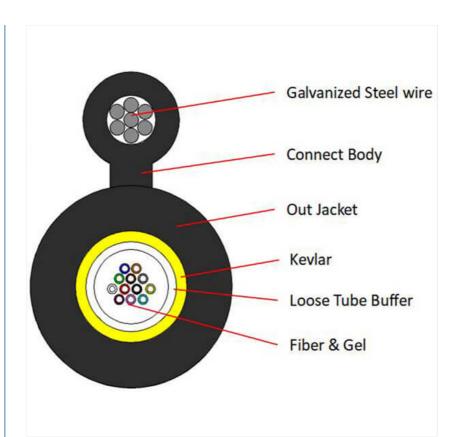





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1\*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled


Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled


Armor: Steel Tape, Thickness 1mm Tension Strength: 3000(Short term) 1000(Long term)

Cable Diameter: 9.5\*17mm


Package: 4km/drum Weight: 156KG/KM




**GYTC8S Cable Order Information** 

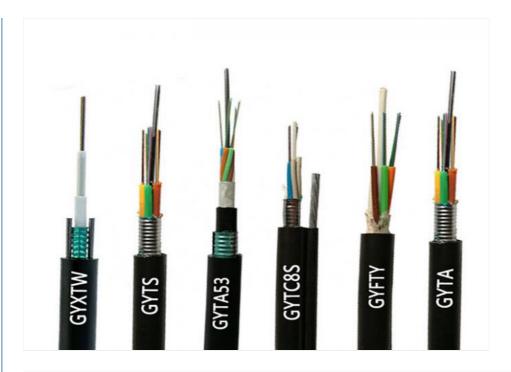

Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance Long term	300 (N/100MM)
Crush Resistance Short term	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

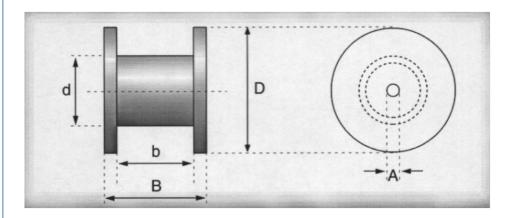

**Production Supplier Profile** 

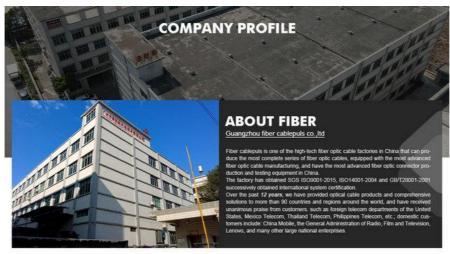



### How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping



guangzhou fiber cablepuls co ltd





925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China