

## Aerial Figure 8 GYTC8S Fiber Optic Cable Outdoor For Communication

## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



## **Product Specification**

GYTC8S . Type: · Aromored: Steel Tape PΕ • Out Sheath Material: • Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: Figure 8 GYTC8S Fiber Optic Cable,

Aerial GYTC8S Fiber Optic Cable, **Communication GYTC8S Fiber Optic Cable** 

## More Images



# Aerial Figure.8 GYTC8S Fiber Optic Cable Outdoor Cable For Communication **Products Description**



GYTC8S is a typical self-supporting outdoor fiber optic cable. It's suitable for aerial applications while its nice moisture resistance performance and crush resistance performance are suitable for duct and buried method. The mental strength member is made up of stranded wires as the supporting part that are completed with a polyethylene(PE) sheath to be figure 8 structure. Corrugated steel tape armored and PE outer sheath provide the crush resistance and gun shot resistance features. As the central strength, the steel-wire strength member improves the tensile strength. In addition, it is surrounded by the loose tube and water blocking system.

## **Details Images**

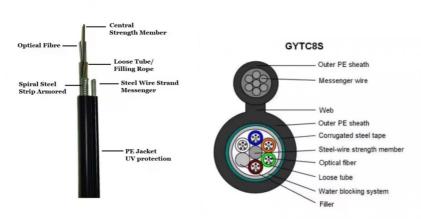


Figure 8 non armoured fiber cable consists of

- 1.Stranded loose tube
- 2.Steel wire strength member
- 3.Core filler compound
- 4.Fillers
- 5. Phosphating or Galvanized steel wire

## **Product Paramenters**

No. of cable		12	24	48
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
Loose Tube	Material	PBT		
	Diameter ( ±0.06)mm	1.9	1.9	1.9
	Thickness ( ±0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
Filler Rope	Material	LDPE		
	Diameter ( ±0.05)mm	1.65	1.65	1.9
	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		
Outer Sheath®	Material	MDPE		

	Thickness ( ±0.2)mm	1.5
Outer Sheath@	Material	MDPE

## **Company Profile**




















SUPPLIER FORTUNE 500 COMPANYS

90+

120+

≤ 2h

99%

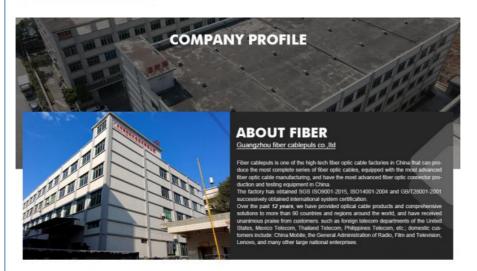













## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**











▲ Finished Cable Testing



## **HOT-SALE PRODUCT**



































SHIPMENT

**PACKAGING** 

TRUCK LOADING

**GOODS RECEIPT** 

## **FAQ**

#### 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

## 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

#### 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

#### 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

## guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China