



GYXTC8S Aerial Figure 8 Fiber Optic Cable Armored Overhead Self Supporting

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTC8S
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km




Product Specification

- Type: GYXTC8S
- Installation Method: Self-supporting
- Cable Type: Figure 8
- Application: Aerial
- Jacket Material: PE
- Cable Color: Black
- Highlight: Armored Aerial Figure 8 Fiber Optic Cable, Overhead Figure 8 Fiber Optic Cable, Self Supporting Aerial Fiber Cable

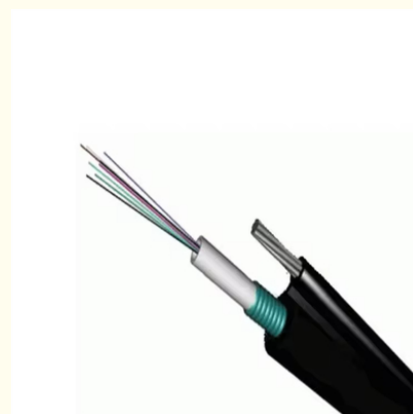


More Images



Product Description

GYXTC8S Aerial Figure 8 Fiber Optic Cable Armored Overhead Self Supporting Cable Products Description

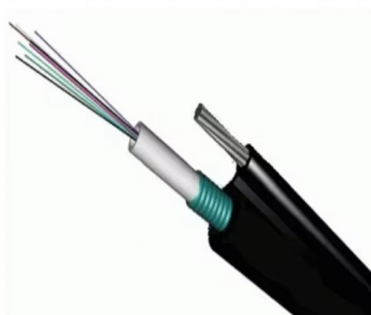

GYXTC8S Fiber Optic Cable

The GYXTC8S cable is constructed by inserting a 250μm fiber into a loose tube made of a high-modulus material filled with a water-repellent compound. The loose tube is coated with a double-sided plastic coated steel strip (PSP) longitudinally, and a water-blocking material is added between the steel strip and the loose tube to ensure compact and longitudinal water blocking of the cable, and the steel strand is integrated into an 8-shaped type. Inside the polyethylene sheath.

Detail Images



Features:

- The steel wire strand has a very high tensile strength, which is convenient for self-supporting overhead laying and reduces installation costs.
- Has good mechanical and temperature properties.
- The loose tube material itself has good hydrolysis resistance and high strength.
- The tube is filled with a special grease to protect the fiber.
- Double coated steel strip (PSP) improves the moisture resistance of the cable.
- Small diameter, light weight and easy to lay.
- Long delivery length and low price.

Product Paramenters

Fiber Model		G.652D		
Loose Tube	Material	PBT		
	Diameter (±0.1)mm	1.8	2.0	2.8
	Thickness (±0.05)mm	0.30		
Water Blocking layer(Material)		Water Blocking Tape		
Armoring	Material	Steel Tape		
	Thickness (±0.03)mm	0.2		
Messenger Wire	Material	Galvanized steel strand		
	Size (±0.05)mm	2.7mm		
Web	Material	MDPE		
	Size (±0.1)mm	2.0 ×3.0		
	Material	MDPE		



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



HOT-SALE PRODUCT



TRANSPORT&PAY



And More.....



SHIPMENT



PACKAGING



TRUCK LOADING



GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;
Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders,just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken:English,Chinese



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China