



GYTC8S Aerial Figure 8 Fiber Optic Cable 2-24 Cores

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYTC8S
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Type: GYTC8SAromored: Steel TapeOut Sheath Material: PE

Installation Method:
 Aerial

• Operating Temperature: -40°C To +70°C

Application: Outdoor Aerial Installation

• Highlight: Overhead Aerial Figure 8 Fiber Optic Cable,

24 Cores Fiber Optic Cable, Overhead Aerial Fiber Optic Cable



More Images



GYTC8S Aerial Figure 8 Fiber Optic Cable (2-24 Cores)

Attribute	Value
Туре	GYTC8S
Armored	Steel tape
Outer Sheath Material	PE
Installation Method	Aerial
Operating Temperature	-40°C to +70°C
Application	Outdoor aerial installation

Product Overview






The GYTC8S is a high-quality standalone fiber optic cable designed for outdoor aerial installations. Its robust construction features excellent moisture resistance and crush resistance, making it suitable for both duct and underground deployment. The cable's structural integrity comes from a metallic strength member of helically wound wires, protected by a polyethylene sheath in an octagonal configuration.

Enhanced with corrugated steel tape and an external polyethylene layer, the cable offers superior crush and bullet resistance. A central steel-wire member increases tensile strength, while the loose tube and water-blocking system provide additional protection.

Construction Details



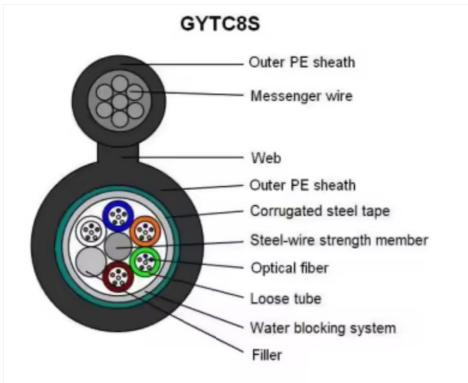

The Figure 8 style non-armoured fiber optic cable consists of:

Stranded loose tube for fiber protection

Central steel wire for added strength

Core filler compound to maintain circular form

Structural support fillers

Phosphating or galvanized steel wire for corrosion resistance


Technical Specifications

No. of cable 12 24 48

Fiber Model	G.652D		
Design (Strength Member+Tube&Filler)	1+5		
Loose Tube Material	PBT		
Diameter (±0.06)mm	1.9	1.9	1.9
Thickness (±0.03)mm	0.25	0.25	0.30
Max.Core NO./Tube	6	6	12
Filler Rope Material	LDPE		
Diameter (±0.05)mm	1.65	1.65	1.9
NO.	3	1	1
Armoring Material	Steel tape		
Thickness(+0.03)mm	0.20		
Outer Sheath Material	MDPE		
Thickness (±0.2)mm	1.5		
Outer Sheath Material	MDPE		

Manufacturer Information



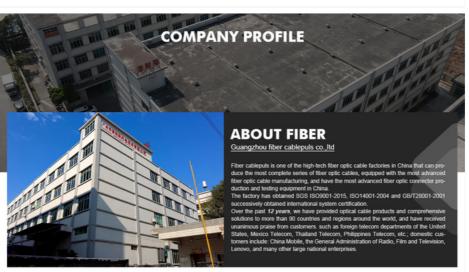



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY































SHIPMENT =

PACKAGING



GOODS RECEIPT

Frequently Asked Questions

Why choose us?

We are the manufacturer located in Guangzhou, China, operating since 2011. We primarily serve the domestic market with a workforce of

11-50 professionals.

How do we guarantee quality?

Pre-production samples before mass production

Final inspection before shipment

Can you send products to my country?

Yes, we can. If you don't have your own shipping forwarder, we can assist with logistics.

Can you do OEM for me?

 $We \ accept \ all \ OEM \ orders. \ Contact \ us \ with \ your \ design \ requirements \ and \ we'll \ provide \ competitive \ pricing \ and \ samples.$

What services do we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currencies: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese





+8613687956390



cotton@fibercablepuls.com



e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China