



Overhead GYTC8S Aerial Figure 8 Fiber Optic Cable 2 12 24 Cores

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTC8S
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km



Product Specification

- Type: GYTC8S
- Aromored: Steel Tape
- Out Sheath Material: PE
- Installation Method: Aerial
- Operating Temperature: -40°C To +70°C
- Application: Outdoor Aerial Installation
- Highlight: Overhead Aerial Figure 8 Fiber Optic Cable, 24 Cores Fiber Optic Cable, Overhead Aerial Fiber Optic Cable



More Images




Product Description

GYTC8S Fiber Optic Cable Hight Quality Cable Overhead Figure.8 2 12 24 Cores GYTC8S Aerial Figure.8 Fiber Optic Cable Products Description



GYTC8S represents a quintessential standalone fiber optic cable designed for outdoor use. It is well-suited for aerial installations, with its commendable resistance to moisture and its ability to withstand crushing forces, making it ideal for both duct and subterranean deployment. The cable's structural integrity is bolstered by a metallic strength member composed of helically wound wires, encased in a polyethylene sheath to form an octagonal configuration. The inclusion of a corrugated steel tape and an external polyethylene layer endows the cable with enhanced crush and bullet resistance capabilities. The central steel-wire member serves to augment the cable's tensile strength, while it is also enveloped by a loose tube and a water-blocking system.

Details Images

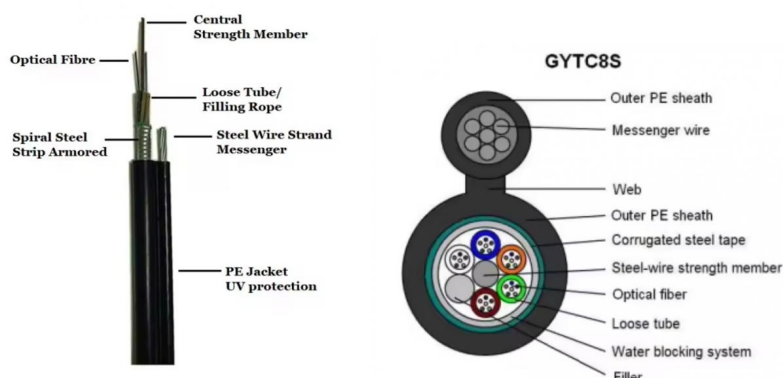

The Figure 8 style non-armoured fiber optic cable is made up of several components: a stranded loose tube for fiber protection, a central steel wire for added strength, a core filler compound to preserve the cable's circular form, fillers to support the structure, and a phosphating or galvanized steel wire for enhanced corrosion defense.

Product Paramenters

No. of cable		12	24	48
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
Loose Tube	Material	PBT		
	Diameter (± 0.06)mm	1.9	1.9	1.9
	Thickness (± 0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
Filler Rope	Material	LDPE		
	Diameter (± 0.05)mm	1.65	1.65	1.9
	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		

Outer Sheath①	Material	MDPE
	Thickness (±0.2)mm	1.5
Outer Sheath②	Material	MDPE

Company Profile

NEWS AND FIBER OPTICAL CABLE SOLUTION

FREE SAMPLES
ONE-STOP SHOP

PROFESSIONAL PERSISTENCE

OEM FOR WELL-KNOW BRANDS

SUPPLIER FORTUNE 500 COMPANYS



Experiences

12



Sold to Countries

90+



Cooperative Suppliers

120+




Response Time

≤ 2h



On-time Delivery Rate

99%

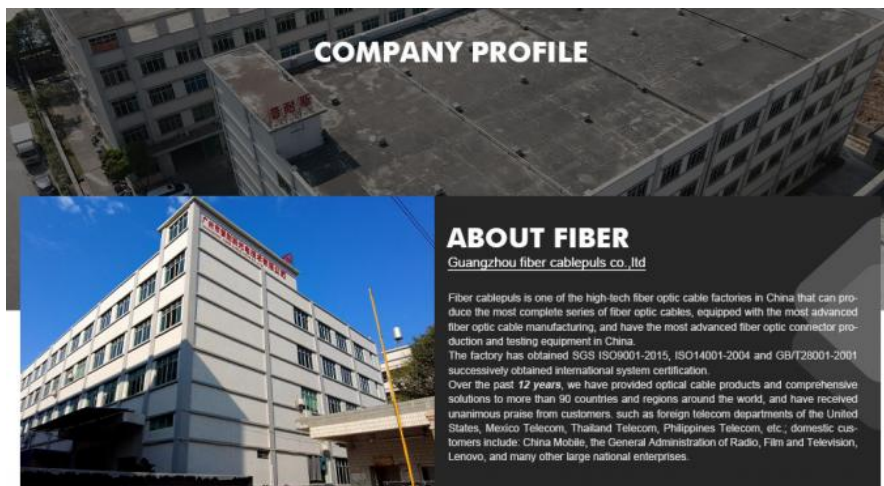

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



HOT-SALE PRODUCT



TRANSPORT&PAY



And More.....



SHIPMENT



PACKAGING



TRUCK LOADING



GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;
Always final Inspection before shipment;

3. Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF;

Accepted Payment Type: T/T, L/C, D/P, D/A, PayPal, Western Union, Escrow;

Language Spoken: English, Chinese



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China