Outdoor GYTC8S Fiber Optic Cable Drop Ftth Cable Messanger Wire Cable

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYTC8S
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Type: GYTC8S
Aromored: Steel Tape
Out Sheath Material: PE
Installation Method: Aerial

• Operating Temperature: -40°C To +70°C

Application: Outdoor Aerial Installation

Highlight: Outdoor GYTC8S Fiber Optic Cable,
 Drop Ftth Cable, GYTC8S Ftth Cable



More Images




GYTC8S Fiber Optic Cable Best Price Drop Ftth Cable Messanger Wire Cable Outdoor GYTC8S Aeiral Figure.8 Fiber Optic Cable Products Description



The GYTC8S is an exemplary self-supporting fiber optic cable intended for outdoor environments. It is particularly adept at aerial installations due to its excellent moisture protection and its robustness against crushing. For underground or duct-based installations, it offers a polyethylene-coated, figure-eight-shaped metallic strength member for support. The cable's durability is further enhanced by a corrugated steel tape and a polyethylene outer sheath, which contribute to its crush and bullet-resistant properties. The steel-wire strength member at the core significantly boosts the cable's tensile strength, complemented by a surrounding loose tube and a water-blocking mechanism.

Details Images

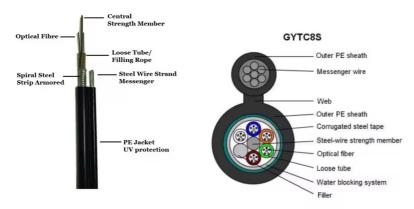

In the construction of a Figure 8 non-armoured fiber cable, the following elements are included: a loose tube made of stranded material for fiber optic protection, a steel wire core for tensile reinforcement, a core filler compound to keep the cable round, additional fillers for structural integrity, and a steel wire treated with phosphating or galvanization to resist corrosion.

Product Paramenters

	lo. of cable	12	24	48
		12		
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
(Otrenguniv	Material	PBT		
Loose Tube	Diameter (±0.06)mm	1.9	1.9	1.9
	Thickness (±0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
Filler Rope	Material	LDPE		
	Diameter (±0.05)mm	1.65	1.65	1.9
	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		
Outer Sheath	Material	MDPE		

	Thickness (±0.2)mm	1.5
Outer Sheath	Material	MDPE

Company Profile




















SUPPLIER FORTUNE 500 COMPANYS

90+ 120+

≤ 2h

99%

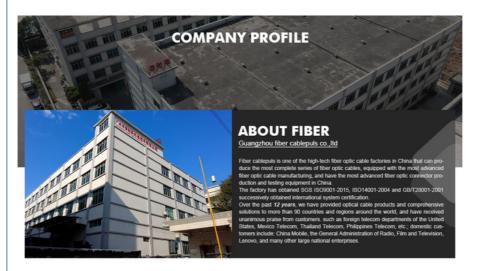














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM














▲ Finished Cable Testing



HOT-SALE PRODUCT





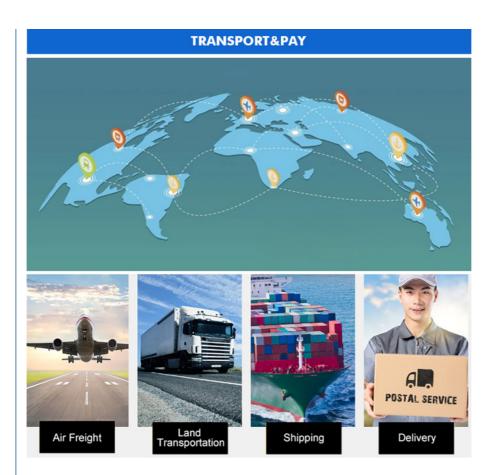









And More.....



















SHIPMENT

PACKAGING

TRUCK LOADING

GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China