

Outdoor GYTC8S Fiber Optic Cable Drop Ftth Cable Messanger Wire Cable

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:

GUANGZHOU/CHINA PUNAISGD/CABLEPULS

- ISO/CE/ROSH GYTC8S

- Supply Ability:

2km negotiate

Wooden Spool /drum

5-25 days

30% TT as deposit, 70% Balance before shipping 100km



Product Specification

- Type:
- Aromored:

• Application:

• Highlight:

- Out Sheath Material:
- Installation Method:
- Operating Temperature:
- -40°C To +70°C Outdoor Aerial Installation

GYTC8S

ΡE

Aerial

Steel Tape

Outdoor GYTC8S Fiber Optic Cable, Drop Ftth Cable, GYTC8S Ftth Cable



More Images



for more products please visit us on fiberoptical-cables.com


Our Product Introduction

GYTC8S Fiber Optic Cable Best Price Drop Ftth Cable Messanger Wire Cable Outdoor GYTC8S Aeiral Figure.8 Fiber Optic Cable Products Description



The GYTC8S is an exemplary self-supporting fiber optic cable intended for outdoor environments. It is particularly adept at aerial installations due to its excellent moisture protection and its robustness against crushing. For underground or duct-based installations, it offers a polyethylene-coated, figure-eight-shaped metallic strength member for support. The cable's durability is further enhanced by a corrugated steel tape and a polyethylene outer sheath, which contribute to its crush and bullet-resistant properties. The steel-wire strength member at the core significantly boosts the cable's tensile strength, complemented by a surrounding loose tube and a water-blocking mechanism.


Details Images

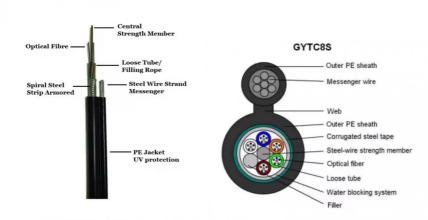

In the construction of a Figure 8 non-armoured fiber cable, the following elements are included: a loose tube made of stranded material for fiber optic protection, a steel wire core for tensile reinforcement, a core filler compound to keep the cable round, additional fillers for structural integrity, and a steel wire treated with phosphating or galvanization to resist corrosion.

Product Paramenters

No. of cable			24	48	
Fiber Model			G.652D		
Design (StrengthMember+Tube&Filler)			1+5		
Loose Tube	Material	PBT			
	Diameter (±0.06)mm	1.9	1.9	1.9	
	Thickness (±0.03)mm	0.25	0.25	0.30	
	The Max.Core NO./Tube	6	6	12	
Filler Rope	Material	LDPE			
	Diameter (±0.05)mm	1.65	1.65	1.9	
	NO.	3	1	1	
Armoring	Material	Steel tape			
	Thickness(+0.03)mm	0.20			
Outer Sheath1	Material	MDPE			

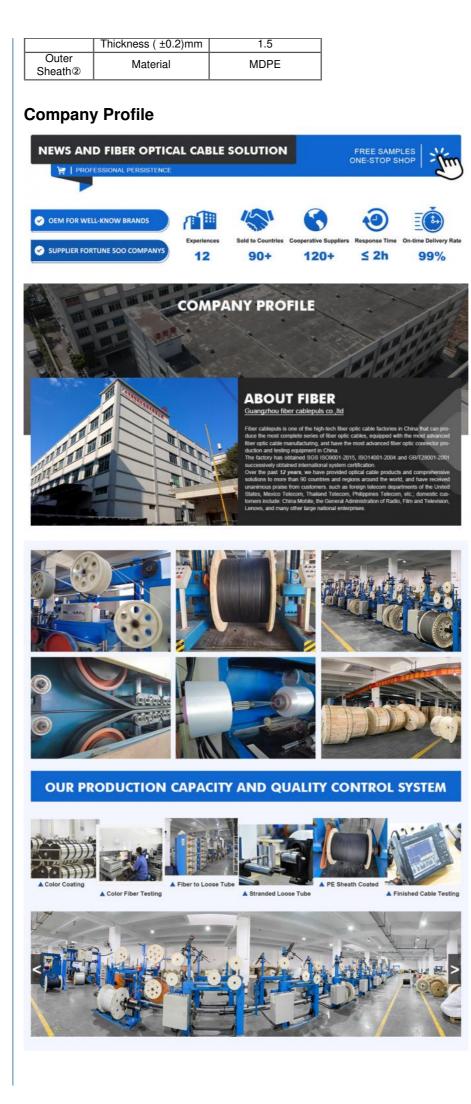





FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality? Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country? Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me? We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide? Accepted Delivery Terms: FOB,CIF,EXW Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow; Language Spoken:English,Chinese

guangzhou fiber cablepuls co ltd					
C	+8613687956390	cotton@fibercablepuls.com	<i>iberoptical-cables.com</i>		
925-926,	Building B1, No. 2 Chuang	hui Avenue, Yonghe Yushan Inter province,China	nationalGuangzhou city,Guangdong		