GYTC8S Aerial Fiber Optic Cable 4-24 Cores Steel Tape Armored

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

GYTC8S • Type: · Aromored: Steel Tape PΕ • Out Sheath Material: • Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: GYTC8S Communication Fiber Optic Cable,

24 Cores Communication Fiber Optic Cable, Self Supporting GYTC8S Fiber Optic Cable



More Images



GYTC8S Communication Fiber Optic Cable Self Supporting 4-24 Cores

Product Specifications

Attribute	Value
Туре	GYTC8S
Armored	Steel tape
Outer sheath material	PE
Installation Method	Aerial
Operating Temperature	-40°C to +70°C
Application	Outdoor aerial installation

Product Description


Designed for outdoor applications, the GYTC8S is a self-reliant fiber optic cable that excels in aerial settings. It boasts superior moisture and crush resistance, which also makes it suitable for underground or duct installations.





The cable features a figure-eight shaped metallic strength member, which is a strand of wires coated with polyethylene. Armored with a corrugated steel tape and a polyethylene sheath, the cable is equipped with crush and bullet resistance. The central steel-wire member functions as the main source of tensile strength, with a loose tube and a water-blocking system providing additional support.



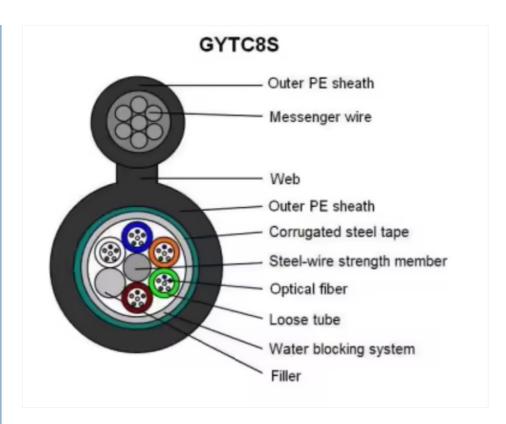

The components of a Figure 8 non-armoured fiber cable include a stranded loose tube that encases the fiber, a steel wire strength member at the core for increased durability, a core filler compound to maintain the cable's circular shape, fillers to provide structural support, and a corrosion-resistant phosphating or galvanized steel wire.

Technical Parameters

No. of cable	12	24	48
Fiber Model	G.652D		
Design (StrengthMember+Tube&Filler)	1+5		
Loose Tube Material	PBT		
Diameter (±0.06)mm	1.9	1.9	1.9
Thickness (±0.03)mm	0.25	0.25	0.30
The Max.Core NO./Tube	6	6	12
Filler Rope Material	LDPE		
Diameter (±0.05)mm	1.65	1.65	1.9
NO.	3	1	1
Armoring Material	Steel tape		
Thickness(+0.03)mm	0.20		
Outer Sheath Material	MDPE		
Thickness (±0.2)mm	1.5		
Outer Sheath Material	MDPE		

Company Profile

NEWS AND FIBER OPTICAL CABLE SOLUTION

📜 | PROFESSIONAL PERSISTENCE


















12

90+

120+

≤ 2h

99%

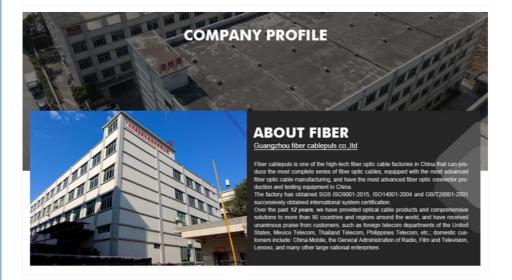














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM















▲ Stranded Loose Tube

▲ Finished Cable Testing



ADSS (MINI ADSS) AIR BLOW CABLE FITH SOLUTION





Frequently Asked Questions

Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

How can we guarantee quality?

Always a pre-production sample before mass production

Always final Inspection before shipment

Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF

Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China