GYTC8S Communication Fiber Optic Cable Self Supporting 4-24 Cores

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

GYTC8S • Type: · Aromored: Steel Tape PΕ • Out Sheath Material:

• Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: GYTC8S Communication Fiber Optic Cable, 24 Cores Communication Fiber Optic Cable,

Self Supporting GYTC8S Fiber Optic Cable



More Images




GYTC8S Fiber Optic Cable Self Supporting Cable 4-24 Cores Communication Cable Products Description



Designed for outdoor applications, the GYTC8S is a self-reliant fiber optic cable that excels in aerial settings. It boasts superior moisture and crush resistance, which also makes it suitable for underground or duct installations. The cable features a figure-eight shaped metallic strength member, which is a strand of wires coated with polyethylene. Armored with a corrugated steel tape and a polyethylene sheath, the cable is equipped with crush and bullet resistance. The central steel-wire member functions as the main source of tensile strength, with a loose tube and a water-blocking system providing additional support.

Details Images

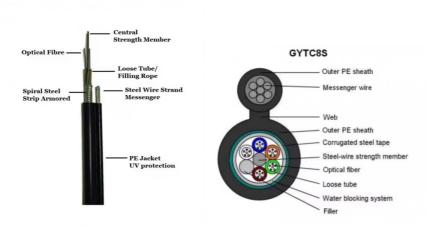

The components of a Figure 8 non-armoured fiber cable include a stranded loose tube that encases the fiber, a steel wire strength member at the core for increased durability, a core filler compound to maintain the cable's circular shape, fillers to provide structural support, and a corrosion-resistant phosphating or galvanized steel wire.

Product Paramenters

No. of cable		12	24	48
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
Loose Tube	Material	PBT		
	Diameter (±0.06)mm	1.9	1.9	1.9
	Thickness (±0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
Filler Rope	Material	LDPE		
	Diameter (±0.05)mm	1.65	1.65	1.9
	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		
Outer Sheath®	Material	MDPE		
	Thickness (±0.2)mm	1.5		

Outer	Material	MDPF		
Sheath@		MDFL		

Company Profile

NEWS AND FIBER OPTICAL CABLE SOLUTION

PROFESSIONAL PERSISTENCE


















12

90+ 120+ ≤ 2h

99%



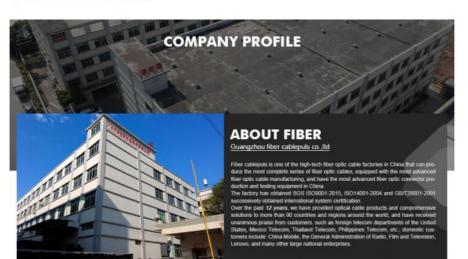













OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM











▲ Finished Cable Testing



HOT-SALE PRODUCT



































SHIPMENT

PACKAGING

TRUCK LOADING

GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China