Overhead GYTC8S Fiber Optic Cable GYTC8Y Steel Tape **Armoured**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

GYTC8S • Type: · Aromored: Steel Tape PΕ • Out Sheath Material:

• Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: Overhead GYTC8S Fiber Optic Cable,

Armoured GYTC8S Fiber Optic Cable,

GYTC8Y Fiber Optic Cable



More Images




GYTC8S Fiber Optic Cable GYTC8S GYTC8Y Cable Overhead Cable Steel Tape Armoured GYTC8S Aeiral Figure.8 Fiber Optic Cable Products Description



The GYTC8S is a standard self-supporting fiber optic cable, perfect for outdoor aerial use. Its notable moisture and crush resistance make it viable for duct and burial applications. The cable's metallic strength member, in the form of a figure-eight strand of wires, is sheathed in polyethylene. The cable's crush resistance and bullet resistance are thanks to its corrugated steel tape armor and polyethylene outer sheath. The tensile strength is improved by the central steel-wire strength member, which is complemented by a loose tube and a water-blocking system.

Details Images

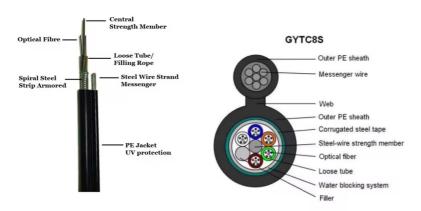

A Figure 8 non-armoured fiber cable is crafted with a variety of materials: a stranded loose tube for fiber protection, a central steel wire to strengthen the cable, a core filler compound to ensure a consistent round shape, fillers to reinforce the structure, and a steel wire coated with phosphating or galvanization to prevent corrosion.

Product Paramenters

| No. of cable | | 12 | 24 | 48 |
|-------------------------------------|--------------------------|------------|------|------|
| Fiber Model | | G.652D | | |
| Design (StrengthMember+Tube&Filler) | | 1+5 | | |
| | Material | PBT | | |
| | Diameter (±0.06)mm | 1.9 | 1.9 | 1.9 |
| Loose Tube | Thickness (±0.03)mm | 0.25 | 0.25 | 0.30 |
| | The Max.Core NO./Tube | 6 | 6 | 12 |
| Filler Rope | Material | LDPE | | |
| | Diameter (±0.05)mm | 1.65 | 1.65 | 1.9 |
| | NO. | 3 | 1 | 1 |
| Armoring | Material | Steel tape | | |
| | Thickness(+0.03)mm | 0.20 | | |
| | | | | |

| Outer Sheath | Material | MDPE |
|-----------------|---------------------|------|
| | Thickness (±0.2)mm | 1.5 |
| Outer Sheath | Material | MDPE |

Company Profile



FREE SAMPLES ONE-STOP SHOP











90+












120+

≤ 2h



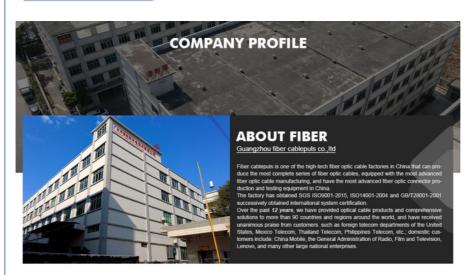














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM


















HOT-SALE PRODUCT





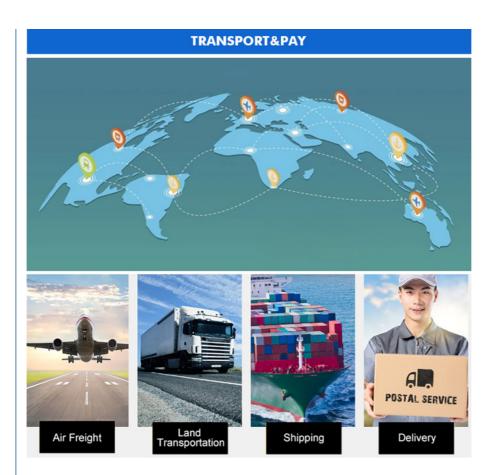









And More.....



















SHIPMENT

PACKAGING

TRUCK LOADING

GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China