GYTC8S Aerial Figure 8 Fiber Optic Cable Single Mode Outdoor

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

GYTC8S • Type: · Aromored: Steel Tape PΕ • Out Sheath Material:

• Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: GYTC8S Aerial Figure 8 Fiber Optic Cable, Single Mode GYTC8S Fiber Optic Cable,

GYTC8S High Speed Data Cable



More Images



GYTC8S Aerial Figure 8 Fiber Optic Cable High Speed Data Cable Single Mode

Product Specifications

Attribute	Value
Туре	GYTC8S
Armored	Steel tape
Outer Sheath Material	PE
Installation Method	Aerial
Operating Temperature	-40°C to +70°C
Application	Outdoor aerial installation

Product Overview





The GYTC8S is a standard outdoor fiber optic cable designed for aerial use with excellent moisture and crush resistance, making it suitable for duct and buried installations. Its structure features:

Figure-eight metallic strength member made of stranded wires


Polyethylene covering for durability


Corrugated steel tape armor for crush and bullet resistance

Central steel-wire strength member for enhanced tensile strength

Loose tube and water-blocking system for additional protection

Construction Details

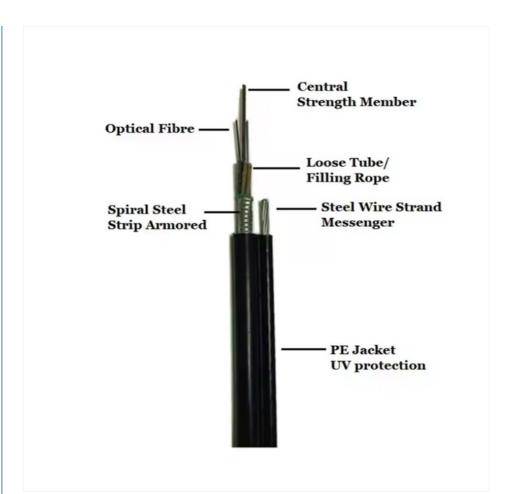

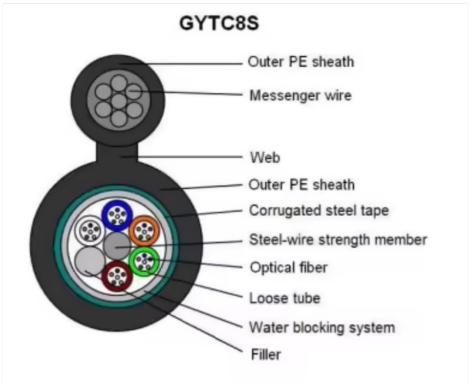

The Figure 8 non-armoured fiber cable construction includes:

Stranded loose tube for fiber containment

Steel wire strength member for structural reinforcement

Core filler compound to maintain cable roundness

Additional fillers for structural support

Phosphating or galvanized steel wire for corrosion protection


Technical Parameters

No of cable	Specifications
-------------	----------------

	12	24	48
Fiber Model	G.652D		
Design (Strength Member + Tube & Filler)	1+5		
Loose Tube Material	PBT		
Diameter (±0.06)mm	1.9	1.9	1.9
Thickness (±0.03)mm	0.25	0.25	0.30
The Max.Core NO./Tube	6	6	12
Filler Rope Material	LDPE		
Diameter (±0.05)mm	1.65	1.65	1.9
NO.	3	1	1
Armoring Material	Steel tape		
Thickness(+0.03)mm	0.20		
Outer Sheath Material	MDPE		
Thickness (±0.2)mm	1.5		
Outer Sheath Material	MDPE		

Manufacturer Information



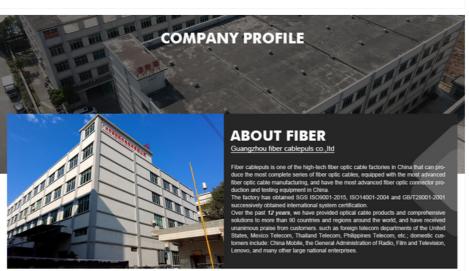



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY POSTAL SERVICE Land Transportation Air Freight Shipping Delivery And More.... **PACKAGING** TRUCK LOADING **GOODS RECEIPT** SHIPMENT

Frequently Asked Questions

Why choose us?

We are the manufacturer located in Guangzhou, China, operating since 2011. We primarily serve the domestic market with a workforce of 11-50 professionals in our factory.

How do we guarantee quality?

We implement strict quality control measures including pre-production samples before mass production and final inspection before shipment.

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own shipping forwarder, we can assist with logistics.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

What services do we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currencies: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF

Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China