



Aerial Figure 8. Fiber Optic Cable GYTC8S GYXTC8S GYTC8Y Aerial Applications With PE Jacket

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTC8S-36B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km



Product Specification

- Type: GYTC8A Aerial
- Useful: Figure 8
- Strength Member: Messenger Wires *7pcs
- Support: Steel Stranded Supporting
- Out Sheath Material: PE
- Aromored: Steel Tape
- Installation Method: Aerial
- Operating Temperature: -40°C To +70°C
- Application: Outdoor Aerial Installation
- Fiber Color: Blue, Orange, Green, Brown, Slate, White, Red, Black
- Tensile Strength: 6000N
- Highlight: GYTC8S Outdoor Fiber Optic Cable, PE Jacket Outdoor Fiber Optic Cable, GYTC8S Aerial Fiber Optic Cable



More Images




Product Description

GYTC8S Outdoor Fiber Optic Cable Aerial Communication Applications PE Jacket GYTC8S Aerial Figure.8 Fiber Optic Cable Products Description

GYTC8S is a model of self-supporting fiber optic cable for outdoor use, particularly suitable for aerial applications. It features outstanding resistance to moisture and crushing, making it apt for duct and underground installations. The cable incorporates a figure-eight metallic strength member constructed from stranded wires, sheathed with polyethylene. It is fortified with a corrugated steel tape and a polyethylene sheath, offering crush and bullet resistance. The central steel-wire member serves to increase the cable's tensile strength, with a loose tube and water-blocking system for further support.



Details Images

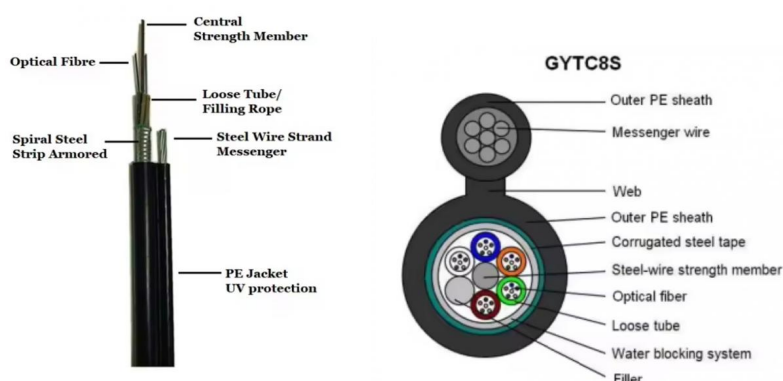

The design of a Figure 8 non-armoured fiber cable incorporates a loose tube with a stranded structure for fiber protection, a steel wire strength member for enhancing the cable's strength, a core filler compound to maintain the round shape, fillers to support the cable's structure, and a steel wire treated with phosphating or galvanization for corrosion resistance.

Product Parameters

No. of cable		12	24	48
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
Loose Tube	Material	PBT		
	Diameter (± 0.06)mm	1.9	1.9	1.9
	Thickness (± 0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
Filler Rope	Material	LDPE		
	Diameter (± 0.05)mm	1.65	1.65	1.9
	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		
Outer Sheath①	Material	MDPE		
	Thickness (± 0.2)mm	1.5		

Outer Sheath②	Material	MDPE
---------------	----------	------



Company Profile

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cable co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



CERTIFICATES





guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China