




GYXTC8S Aerial Figure 8 Fiber Optic Cable Armored Drop FttH Cable


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTC8S
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km

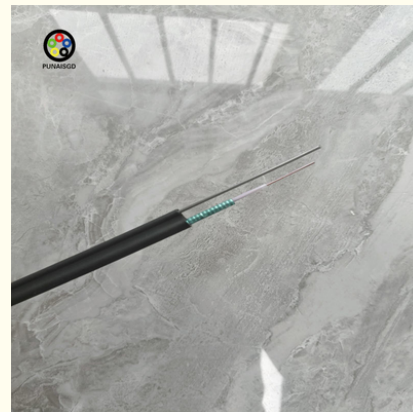


Product Specification

- Type: GYXTC8S
- Installation Method: Self-supporting
- Cable Type: Figure 8
- Application: Aerial
- Jacket Material: PE
- Cable Color: Black
- Highlight: GYXTC8S Aerial Figure 8 Fiber Optic Cable, Armored Fiber Optic Cable, GYXTC8S FttH Cable

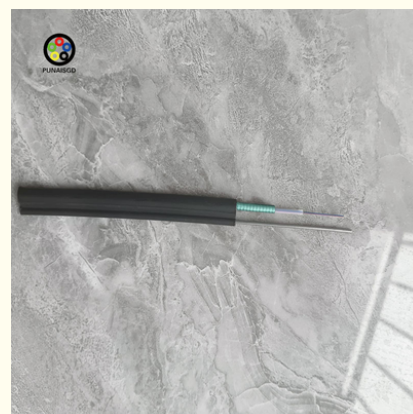


More Images



Product Description


GYXTC8S Fiber Optic Cable Best Price Aerial Armored Drop FttH Cable Products Description

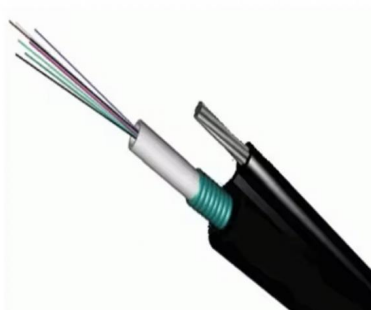

GYXTC8S Fiber Optic Cable

The GYXTC8S type cable incorporates a 250μm optical fiber encased within a slack tube crafted from a high-strength material, which is then saturated with a hydrophobic gel. This tube is subsequently enveloped with a steel tape that has been coated with a plastic on both sides (PSP), running in a longitudinal direction. To ensure the cable's tightness and its ability to prevent water from moving along its length, a water-blocking substance is interposed between the steel tape and the slack tube. The cable also features a steel strand that is arranged in an octagonal configuration, all encased within a polyethylene jacket.

Detail Images

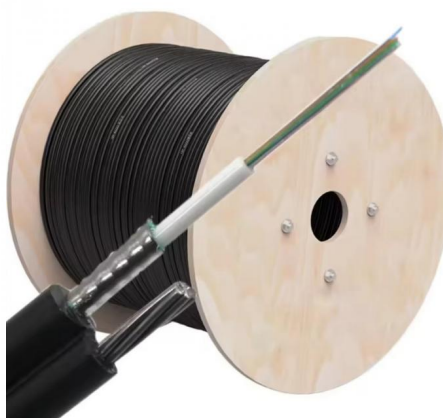

Features:

1. The cable's steel wire strand boasts an exceptionally high tensile strength, facilitating self-supporting aerial installation and consequently cutting down on the expenses associated with deployment.
2. It exhibits superior mechanical and thermal characteristics.
3. The material of the loose tube is inherently resistant to hydrolysis and possesses considerable strength.
4. The interior of the tube is filled with a proprietary grease that safeguards the fiber.
5. The dual-layer steel strip (PSP) enhances the cable's resistance to moisture.
6. It features a compact diameter, making it lightweight and straightforward to install.
7. It is available in long lengths and is cost-effective.

Product Parameters

| Fiber Model | | G.652D | | |
|--------------------------------|----------------------------|---------------------|-----|-----|
| Loose Tube | Material | PBT | | |
| | Diameter (± 0.1)mm | 1.8 | 2.0 | 2.8 |
| | Thickness (± 0.05)mm | 0.30 | | |
| Water Blocking layer(Material) | | Water Blocking Tape | | |
| Armoring | Material | Steel Tape | | |
| | Thickness (± 0.03)mm | 0.2 | | |

| | | | | |
|--------------------------|-----------------------|-------------------------|----------|--------------------------------------|
| Messenger Wire | Material | Galvanized steel strand | | |
| | Size (±0.05)mm | 2.7mm | | |
| Web | Material | MDPE | | |
| | Size (±0.1)mm | 2.0 ×3.0 | | |
| Outer Sheath① | Material | MDPE | | |
| | Thickness (±0.1)mm | 1.2 | | |
| Outer Sheath② | Material | MDPE | | |
| | Thickness (±0.1)mm | 1.5 | | |
| Cable Diameter (±0.5)mm | | 7.0* 11.5 | 7.0*11.5 | 7 · 3 * 1 3 · 5 |
| Cable Weight (±10)kg | | 80 | 80 | 9 4 |
| Min. bending radius | Without Tension | 10.0 ×Cable-φ | | |
| | Under Maximum Tension | 20.0 ×Cable-φ | | |
| Temperature range (°C) | Installation | -20~+60 | | |
| | Transport&Storage | -40~+70 | | |
| | Operation | -40~+70 | | |

Company Profile

NEWS AND FIBER OPTICAL CABLE SOLUTION

FREE SAMPLES
ONE-STOP SHOP

PROFESSIONAL PERSISTENCE

OEM FOR WELL-KNOW BRANDS

Experiences
12

Sold to Countries
90+

Cooperative Suppliers
120+

Response Time
≤ 2h

On-time Delivery Rate
99%

SUPPLIER FORTUNE 500 COMPANYS

COMPANY PROFILE

ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



HOT-SALE PRODUCT



TRANSPORT&PAY



And More.....



SHIPMENT



PACKAGING



TRUCK LOADING



GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;
Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders,just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken:English,Chinese



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China