PUNAISGD/CABLEPULS

. Brand Name:

ISO/CE/ROSH **GYXTC8S**

• Minimum Order Quantity:

2km

• Price:

negotiate

· Packaging Details:

Wooden Spool /drum

• Delivery Time:

5-25 days

Payment Terms:

30% TT as deposit, 70% Balance before

GYXTC8S Fiber Optic Cable Self Supporting With Stranded Steel

> shipping 100km

• Supply Ability:



Product Specification

• Type:

GYXTC8S

• Installation Method:

Self-supporting

. Cable Type:

Figure 8

Application:

Aerial Installation

Jacket Material:

PΕ

Highlight:

GYXTC8S Fiber Optic Cable,

Stranded Steel Fiber Optic Cable,

Stranded Self Supporting Fiber Optic Cable



More Images



Our Product Introduction

GYXTC8S Fiber Optic Cable Self Supporting Network Cable With Stranded Steel Products Description





GYXTC8S Fiber Optic Cable

The GYXTC8S cable is designed with a 250µm fiber core, encased in a flexible tube made from a material with high rigidity and infused with a gel that repels water. This tube is then wrapped with a plastic-coated steel tape (PSP) that runs the length of the cable. A water-blocking substance is interspersed between the steel tape and the tube to ensure the cable is watertight and prevents water from traveling longitudinally. Additionally, the cable includes an 8-shaped steel strand, all of which is encapsulated in a polyethylene sheath.

Detail Images



Features:

- 1. The steel wire within the strand offers remarkable tensile strength, which is advantageous for overhead self-supporting installations, thereby minimizing the costs of setup.
- 2.It possesses excellent mechanical and thermal properties.
- 3. The loose tube's material is naturally resistant to hydrolysis and is highly robust.
- 4.A unique grease is used to fill the tube, ensuring the protection of the fiber.
- 5. The application of a double-coated steel strip (PSP) boosts the cable's moisture resistance.
- 6.It is characterized by a small diameter, light weight, and ease of installation.
- 7.It is supplied in lengthy rolls and is priced affordably.

Product Paramenters

Fiber Model		G.652D		
Loose Tube	Material	PBT		
	Diameter (±0.1)mm	1.8	2.0 . 8	
	Thickness (±0.05)mm	0.30		
Water Blocking layer(Material)		Water Blocking Tape		
Armoring	Material	Steel Tape		
	Thickness (±0.03)mm	0.2		
Messenger Wire	Material	Galvanized steel strand		
	Size (±0.05)mm	2.7mm		

Web	Material	MDPE		
	Size (±0.1)mm	2.0 ×3.0		
Outer Sheath ^①	Material	MDPE		
	Thickness (±0.1)mm	1.2		
Outer Sheath@	Material	MDPE		
	Thickness (±0.1)mm	1.5		
Cable Diameter (±0.5)mm		7.0* 11.5	7.0*11.5	7 3 * 1 3 5
Cable Weight (±10)kg		80	80	9 4
Min. bending radius	Without Tension	10.0 ×Cable-φ		
	Under Maximum Tension	20.0 ×Cable-φ		
Temperature range (°C)	Installation	-20~+60		
	Transport&Stora ge	-40~+70		
	Operation	-40~+70		

Company Profile


















12

Sold to Countr

120+

≤ 2h

99%

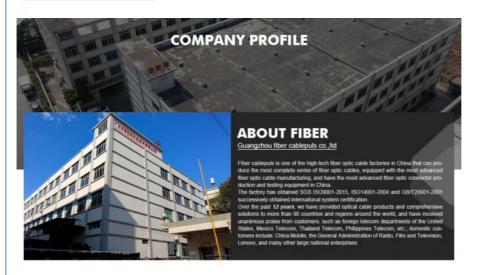



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM







HOT-SALE PRODUCT







1. Why choose us?

SHIPMENT

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

TRUCK LOADING

GOODS RECEIPT

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

PACKAGING

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China